

INTERNATIONAL STANDARD

ISO
529

Second edition
1993-01-15

Short machine taps and hand taps

Tarauds courts à machine et à main



Reference number
ISO 529:1993(E)

Contents

	Page
Section 1 General	1
1.1 Scope	1
1.2 Normative references	1
Section 2 ISO metric threads	3
2.1 Threads up to M25	3
2.1.1 Full-diameter shank taps with plain connecting portion	3
2.1.2 Full-diameter shank taps with recess	4
2.1.3 Relieved-shank taps	5
2.2 Threads above M25	7
2.2.1 Relieved-shank taps for coarse pitch metric thread	7
2.2.2 Relieved-shank taps for fine pitch metric thread	8
Section 3 ISO inch threads, "Unified coarse" (UNC) and "Unified fine" (UNF) series	11
3.1 "Unified" series threads up to 25,4 mm	11
3.1.1 Full-diameter shank taps with plain connecting portion ..	11
3.1.2 Full-diameter shank taps with recess	12
3.1.3 Relieved-shank taps	13
3.2 "Unified" series threads above 25,4 mm	14
3.2.1 Relieved-shank taps for "Unified coarse" series threads	14
3.2.2 Relieved-shank taps for "Unified fine" series threads	15
Section 4 Non-recommended inch threads	16
4.1 "British Standard Whitworth" (BSW) and "British Standard Fine" (BSF) threads	16
4.1.1 Full-diameter shank taps with recess	16
4.1.2 Relieved-shank taps	17
4.2 "British Association" (BA) threads	19

© ISO 1993

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization

Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

4.2.1	Full-diameter shank taps with plain connecting portion ..	19
4.2.2	Full-diameter shank taps with recess	20
4.2.3	Relieved-shank taps	21

Annexes

A	Shank diameter, overall length and thread length as a function of range of diameters and pitches	22
B	Shank diameters and size of driving squares (Extract from ISO 237)	24
C	Bibliography	25

STANDARDSISO.COM : Click to view the full PDF of ISO 529:1993

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 529 was prepared by Technical Committee ISO/TC 29, *Small tools*, Sub-Committee SC 4, *Screwing taps and dies*.

This second edition cancels and replaces the first edition (ISO 529:1975), of which it constitutes a technical revision.

Annex A forms an integral part of this International Standard. Annexes B and C are for information only.

Short machine taps and hand taps

Section 1: General

1.1 Scope

This International Standard specifies the general dimensions of short machine taps and hand taps. These dimensions, established as functions of the thread diameter and pitch, are the following:

- length of thread (maximum);
- overall length;
- shank diameter and dimensions of driving square;
- dimensions of the connecting portion between the shank and threaded part.

This International Standard is applicable to taps intended for cutting the following threads:

- a) ISO metric threads
 - coarse pitch;
 - fine pitch.
- b) ISO inch threads
 - “Unified Coarse” series (UNC) and “Unified Fine” series (UNF).
- c) Inch threads, non-recommended
 - “British Standard Whitworth” (BSW) and “British Standard Fine” (BSF);
 - “British Association” (BA).

NOTES

1 The overall length, thread length and diameters of shank for taps whose thread diameter and pitch are not listed in tables are given in table A.1.

2 Annex B gives an abstract from ISO 237 for shank diameters and size of driving squares, for information.

Technical specifications for taps covered by this International Standard (including marking) are given in ISO 8830.

1.2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject

to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 237:1975, *Rotating tools with parallel shanks — Diameters of shanks and sizes of driving squares.*

ISO 2857:1973, *Ground thread taps for ISO metric threads of tolerances 4H to 8H and 4G to 6G coarse and fine pitches — Manufacturing tolerances on the threaded portion.*


ISO 8830:1991, *High-speed steel machine taps with ground threads — Technical specifications.*

STANDARDSISO.COM : Click to view the full PDF of ISO 529:1993

Section 2: ISO metric threads

2.1 Threads up to M25

2.1.1 Full-diameter shank taps with plain connecting portion

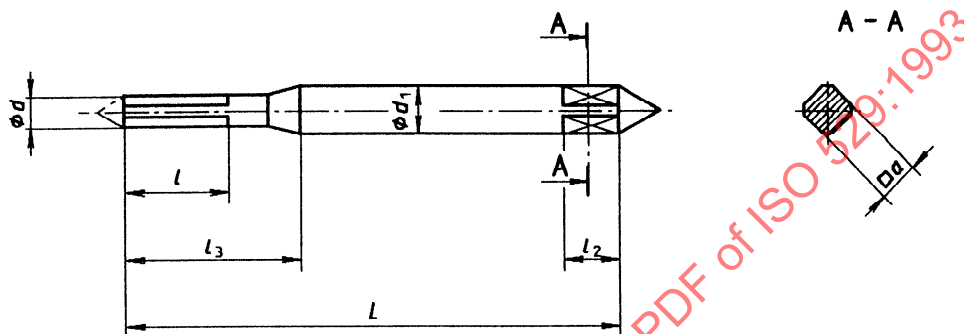

Dimensions in millimetres

Designation		d	Pitch		d_1	$l^{1)}$	L	l_3	Square	
Coarse pitch	Fine pitch	nom.	coarse	fine	h9 ²⁾	max.	h16		a h11 ³⁾	l_2 $\pm 0,8$
M1	M1 × 0,2	1	0,25	0,2	2,5	5,5	38,5	10	2	4
M1,1	M1,1 × 0,2	1,1								
M1,2	M1,2 × 0,2	1,2								
M1,4	M1,4 × 0,2	1,4				0,3				
M1,6	M1,6 × 0,2	1,6				0,35				
M1,8	M1,8 × 0,2	1,8								
M2	M2 × 0,25	2	0,4	0,25	2,8	9,5	44,5	13,5	2,24	5
M2,2	M2,2 × 0,25	2,2	0,45							
M2,5	M2,5 × 0,35	2,5						0,35		


1) Manufacturers, if they wish, may increase the thread length to

$$l + \frac{l_3 - l}{2}$$

2) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

3) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

2.1.2 Full-diameter shank taps with recess

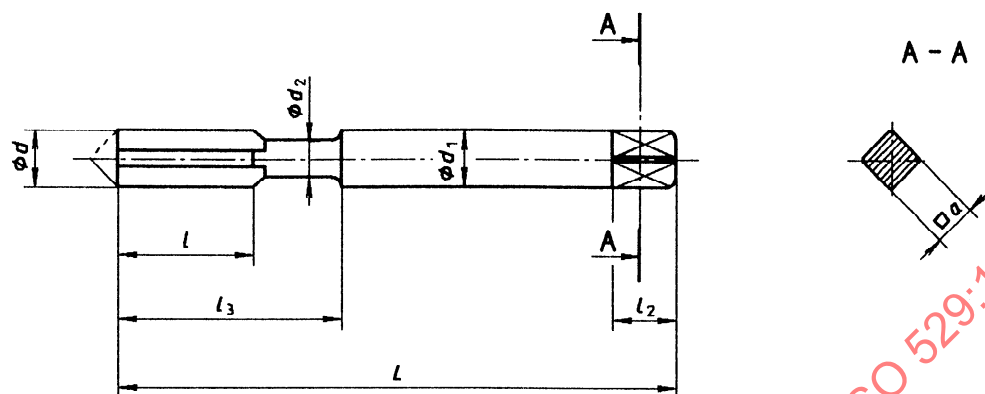

Dimensions in millimetres

Designation		d nom.	Pitch		d_1 h9 ²⁾	$l^{1)}$ max.	L h16	$d_2^{1)}$ min.	l_3	Square	
Coarse pitch	Fine pitch		coarse	fine						a h11 ³⁾	l_2 $\pm 0,8$
M3	M3 $\times$ 0,35	3	0,5	0,35	3,15	11	48	2,12	18	2,5	5
M3,5	M3,5 $\times$ 0,35	3,5	0,6		3,55		50	2,5	20	2,8	
M4	M4 $\times$ 0,5	4	0,7	0,5	4	13	53	2,8	21	3,15	6
M4,5	M4,5 $\times$ 0,5	4,5	0,75		4,5			3,15		3,55	
M5	M5 $\times$ 0,5	5	0,8		5	16	58	3,55	25	4	7
—	M5,5 $\times$ 0,5	5,5	—		5,6	17	62	4	26	4,5	7
M6	M6 $\times$ 0,75	6	1	0,75	6,3	19	66	4,5	30	5	8
M7	M7 $\times$ 0,75	7			7,1			5,3		5,6	
M8	M8 $\times$ 1	8	1,25	1	8	22	72	6	35	6,3	9
M9	M9 $\times$ 1	9			9			7,1	36	7,1	10
M10	M10 $\times$ 1	10	1,5		10	24	80	7,5	39	8	11
	M10 $\times$ 1,25		1,25								


1) The recess of full diameter shank taps with recess is optional at the manufacturer's discretion. If the recess is not required such taps shall have a thread length equal to

$$l + \frac{l_3 - l}{2}$$

2) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

3) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

2.1.3 Relieved-shank taps

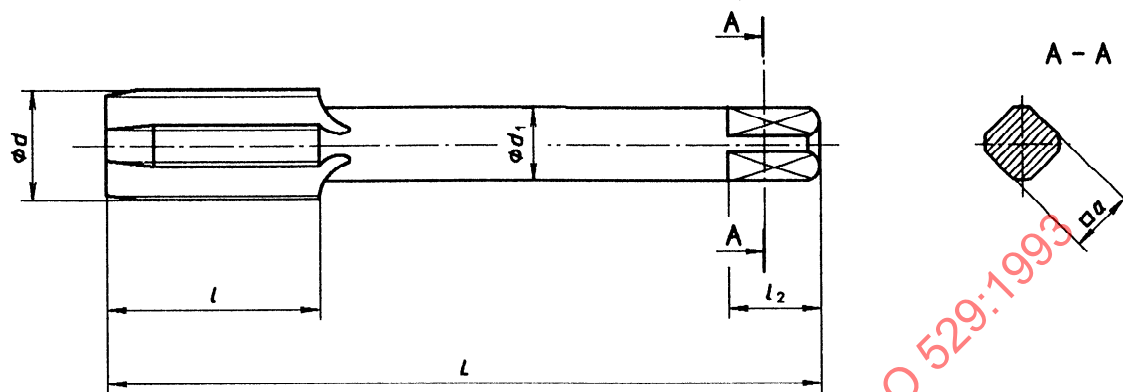

Dimensions in millimetres

Designation		d nom.	Pitch		d_1 h9 ¹⁾	l max.	L h16	Square	
Coarse pitch	Fine pitch		coarse	fine				a h11 ²⁾	l_2 $\pm 0,8$
M3	M3 $\times$ 0,35	3	0,5	0,35	2,24	11	48	1,8	4
M3,5	M3,5 $\times$ 0,35	3,5	0,6		2,5	13	50	2	
M4	M4 $\times$ 0,5	4	0,7		3,15		53	2,5	5
M4,5	M4,5 $\times$ 0,5	4,5	0,75		3,55			2,8	
M5	M5 $\times$ 0,5	5	0,8		4	16	58	3,15	6
—	M5,5 $\times$ 0,5	5,5	—			17	62		
M6	M6 $\times$ 0,75	6	1	0,75	4,5	19	66	3,55	7
M7	M7 $\times$ 0,75	7			5,6			4,5	
M8	M8 $\times$ 1	8	1,25	1	6,3	22	72	5	8
M9	M9 $\times$ 1	9			7,1			5,6	
M10	M10 $\times$ 1	10	1,5	1,25	8	24	80	6,3	9
	M10 $\times$ 1,25								
M11	—	11		—		25	85		
M12	M12 $\times$ 1,25	12	1,75	1,25	9	29	89	7,1	10
	M12 $\times$ 1,5			1,5					


Designation		<i>d</i> nom.	Pitch		<i>d</i> ₁ h9 ¹⁾	<i>l</i> max.	<i>L</i> h16	Square					
Coarse pitch	Fine pitch		coarse	fine				<i>a</i> h11 ²⁾	<i>l</i> ₂ ± 0,8				
M14	M14 × 1,25	14	2	1,25	11,2	30	95	9	12				
	M14 × 1,5			1,5									
—	M15 × 1,5	15			—	12,5	32	102	10	13			
M16	M16 × 1,5	16											
—	M17 × 1,5	17	2,5			14	37	112	11,2	14			
M18	M18 × 1,5	18		2									
	M18 × 2			1,5									
M20	M20 × 1,5	20		2	16						38	118	12,5
	M20 × 2		1,5										
M22	M22 × 1,5	22	2	18		45	130	14	18				
	M22 × 2		1,5										
M24	M24 × 1,5	24	3		—					25	—	—	—
	M24 × 2		2										
—	M25 × 1,5	25	1,5	2									
	M25 × 2												

1) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

2) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

2.2 Threads above M25

2.2.1 Relieved-shank taps for coarse pitch metric thread

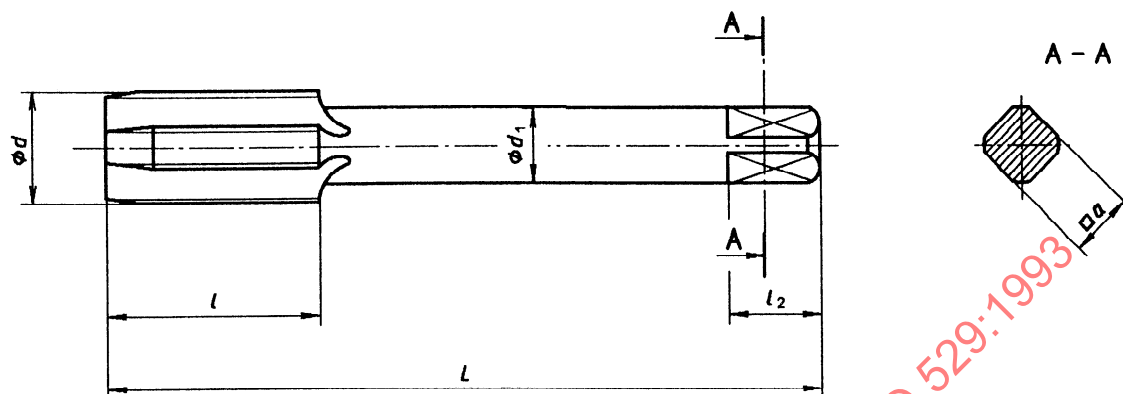


Dimensions in millimetres

Designation	d	Pitch	d_1	l	L	Square	
	nom.		h9 ¹⁾	max.	h16	a h11 ²⁾	l_2 $\pm 1,6$
M27	27	3	20	45	135	16	20
M30	30	3,5		48	138		
M33	33			22,4	51	151	18
M36	36	4	25	57	162	20	24
M39	39			28	60	170	22,4
M42	42	4,5					
M45	45			31,5	67	187	25
M48	48	5					
M52	52			35,5	70	200	28
M56	56	5,5					
M60	60			40	76	221	31,5
M64	64	6			79	224	
M68	68			45		234	35,5

1) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

2) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position to the shank.

2.2.2 Relieved-shank taps for fine pitch metric thread

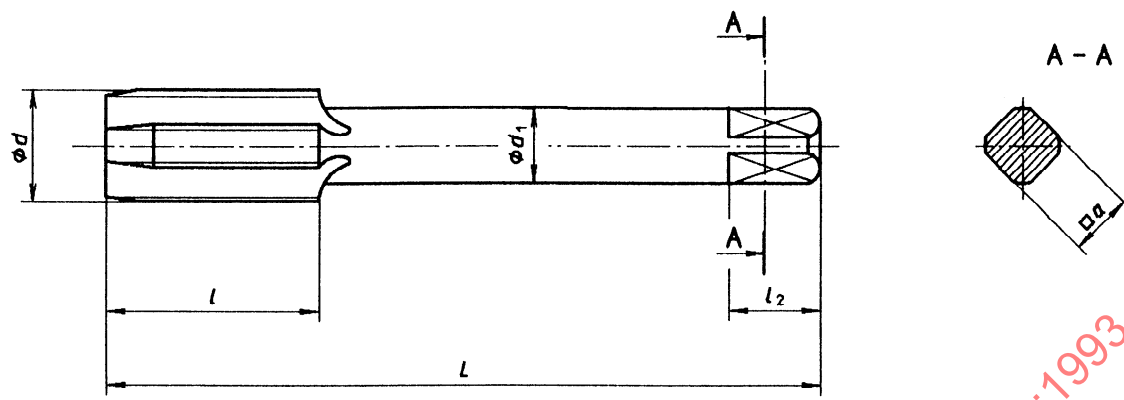

Dimensions in millimetres

Designation	d	Pitch	d_1	l	L	Square	
	nom.		h9 ¹⁾	max.	h16	a h11 ²⁾	l_2 $\pm 1,6$
M27 × 1,5	27	1,5	20	37	127	16	20
M27 × 2		2					
M28 × 1,5	28	1,5					
M28 × 2		2					
M30 × 1,5	30	1,5					
M30 × 2		2					
M30 × 3		3					
M32 × 1,5	32	1,5	22,4	37	137	18	22
M32 × 2		2					
M33 × 1,5	33	1,5					
M33 × 2		2					
M33 × 3		3					
M35 × 1,5	35	1,5	25	39	144	20	24
M36 × 1,5	36						
M36 × 2		2					
M36 × 3		3					

Designation	d nom.	Pitch	d_1 h9 ¹⁾	l max.	L h16	Square	
						a h11 ²⁾	l_2 $\pm 1,6$
M39 × 1,5	39	1,5	28	39	149	22,4	26
M39 × 2		2		60	170		
M39 × 3		3		39	149		
M40 × 1,5	40	1,5		60	170		
M40 × 2		2		39	149		
M40 × 3		3		60	170		
M42 × 1,5	42	1,5		39	149		
M42 × 2		2		60	170		
M42 × 3		3		39	149		
M42 × 4		4		60	170		
M45 × 1,5	45	1,5	31,5	45	165	25	28
M45 × 2		2		67	187		
M45 × 3		3		45	165		
M45 × 4		4		67	187		
M48 × 1,5	48	1,5		45	165		
M48 × 2		2		67	187		
M48 × 3		3		45	165		
M48 × 4		4		67	187		
M50 × 1,5	50	1,5		45	165		
M50 × 2		2		67	187		
M50 × 3		3		45	165		

Designation	d nom.	Pitch	d_1 h9 ¹⁾	l max.	L h16	Square	
						a h11 ²⁾	l_2 $\pm 1,6$
M52 × 1,5	52	1,5	35,5	45	175	28	31
M52 × 2		2					
M52 × 3		3		70	200		
M52 × 4		4					
M55 × 1,5	55	1,5		45	175		
M55 × 2		2					
M55 × 3		3		70	200		
M55 × 4		4					
M56 × 1,5	56	1,5		45	175		
M56 × 2		2					
M56 × 3		3		70	200		
M56 × 4		4					
M70 × 6	70	6	45	79	234	35,5	38
M72 × 6	72						
M75 × 6	75						
M76 × 6	76						
M80 × 6	80		50	83	258	40	42
M85 × 6	85			86	261		
M90 × 6	90						
M95 × 6	95						
M100 × 6	100		56	89	279	45	46


1) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

2) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position to the shank.

Section 3: ISO inch threads, “Unified coarse” (UNC) and “Unified fine” (UNF) series

3.1 “Unified” series threads up to 25,4 mm

3.1.1 Full-diameter shank taps with plain connecting portion

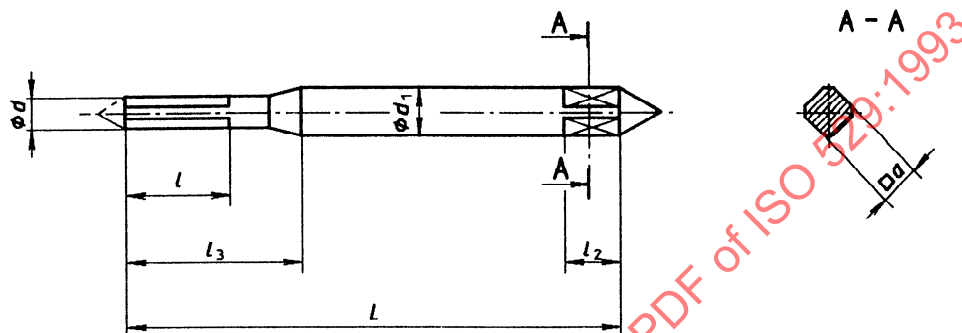

Dimensions in millimetres

Designation		d nom.	Pitch ≈		d ₁ h9 ²⁾	l ¹⁾ max.	L h16	l ₃	Square	
UNC	UNF		UNC	UNF					a h11 ³⁾	l ₂ ± 0,8
—	No.0-80-UNF	1,524	—	0,318	2,5	8	41	13	2	4
No.1-64-UNC	No.1-72-UNF	1,854	0,397	0,353				13,5		
No.2-56-UNC	No.2-64-UNF	2,184	0,454	0,397	2,8	9,5	44,5	15,5	2,24	5
No.3-48-UNC	No.3-56-UNF	2,515	0,529	0,454						


1) Manufacturers if they wish may increase the thread length to

$$l + \frac{l_3 - l}{2} -$$

2) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

3) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

3.1.2 Full-diameter shank taps with recess

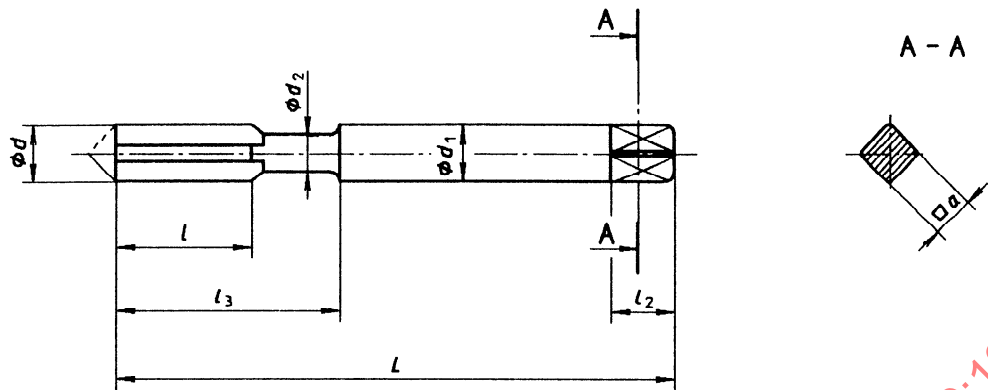

Dimensions in millimetres


Designation		d	Pitch		d_1	$l^{1)}$	L	$d_2^{1)}$	l_3	Square	
UNC	UNF	nom.	UNC	UNF	h9 ²⁾	max.	h16	min.		$\frac{a}{h11^{3)}$	$\frac{l_2}{\pm 0,8}$
No.4-40-UNC	No.4-48-UNF	2,845	0,635	0,529	3,15	11	48	2,12	18	2,5	5
No.5-40-UNC	No.5-44-UNF	3,175		0,577				2,36			
No.6-32-UNC	No.6-40-UNF	3,505	0,794	0,635	3,55	13	50	2,5	20	2,8	
No.8-32-UNC	No.8-36-UNF	4,166		0,706			4,5	53	3,15	21	3,55
No.10-24-UNC	No.10-32-UNF	4,826	1,058	0,794	5	16	58	3,55	25	4	7
No.12-24-UNC	No.12-28-UNF	5,486		0,907	5,6	17	62	4,25	26	4,5	
1/4-20-UNC	1/4-28-UNF	6,35	1,27			6,3	19	66	4,5	30	5
5/16-18-UNC	5/16-24-UNF	7,938	1,411	1,058	8	22	72	6	35	6,3	9
3/8-16-UNC	3/8-24-UNF	9,525	1,588		10	24	80	7,5	39	8	11

1) The recess of full-diameter shank taps with recess is optional at the manufacturer's discretion. If the recess is not required such taps shall have a thread length equal to

$$l + \frac{l_3 - l}{2}$$

2) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.
3) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

3.1.3 Relieved-shank taps

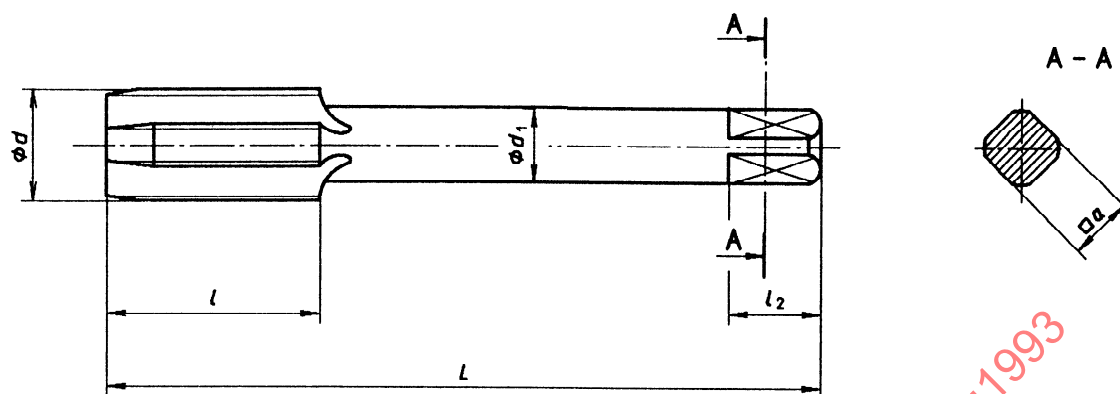

Dimensions in millimetres

Designation		d nom.	Pitch $\approx$		d_1 h9 ¹⁾	l max.	L h16	Square	
UNC	UNF		UNC	UNF				a h11 ²⁾	l_2 $\pm 0,8$
No.5-40-UNC	No.5-44-UNF	3,175	0,635	0,577	2,24	11	48	1,8	4
No.6-32-UNC	No.6-40-UNF	3,505	0,794	0,635	2,5	13	50	2	
No.8-32-UNC	No.8-36-UNF	4,166		0,706	3,15		53	2,5	5
No.10-24-UNC	No.10-32-UNF	4,826	1,058	0,794	3,55	16	58	2,8	
No.12-24-UNC	No.12-28-UNF	5,486		0,907	4	17	62	3,15	6
1/4-20-UNC	1/4-28-UNF	6,35	1,27		4,5	19	66	3,55	
5/16-18-UNC	5/16-24-UNF	7,938	1,411	1,058	6,3	22	72	5	8
3/8-16-UNC	3/8-24-UNF	9,525	1,588		7,1	24	80	5,6	
7/16-14-UNC	7/16-20-UNF	11,112	1,814	1,27	8	25	85	6,3	9
1/2-13-UNC	1/2-20-UNF	12,7	1,954		9	29	89	7,1	10
9/16-12-UNC	9/16-18-UNF	14,288	2,117	1,411	11,2	30	95	9	12
5/8-11-UNC	5/8-18-UNF	15,875	2,309		12,5	32	102	10	13
3/4-10-UNC	3/4-16-UNF	19,05	2,54	1,588	14	37	112	11,2	14
7/8-9-UNC	7/8-14-UNF	22,225	2,822	1,814	16	38	118	12,5	16
1-8-UNC	1-12-UNF	25,4	3,175	2,117	18	45	130	14	18


1) In accordance with ISO 237, tolerance h9 applies to precision shanks for non-precision shanks, the tolerance is h11.

2) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

NOTE 3 Some shank diameters are not in accordance with the table in annex A.

3.2 “Unified” series threads above 25,4 mm

3.2.1 Relieved-shank taps for “Unified coarse” series threads

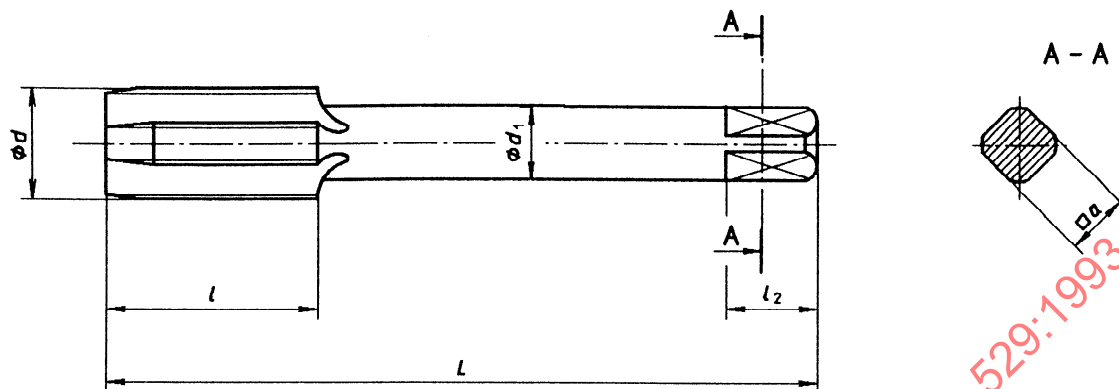


Dimensions in millimetres

Designation	d nom.	Pitch $\approx$	d_1 h9 ¹⁾	l max.	L h16	Square	
						a h11 ²⁾	l_2 $\pm 1,6$
1 1/8-7-UNC	28,575	3,629	20	48	138	16	20
1 1/4-7-UNC	31,75		22,4	51	151	18	22
1 3/8-6-UNC	34,925	4,233	25	57	162	20	24
1 1/2-6-UNC	38,1		28	60	170	22,4	26
1 3/4-5-UNC	44,45	5,08	31,5	67	187	25	28
2-4 1/2-UNC	50,8	5,644	35,5	70	200	28	31
2 1/4-4 1/2-UNC	57,15		40	76	221	31,5	34
2 1/2-4-UNC	63,5	79		224			
2 3/4-4-UNC	69,85		45	234	35,5	38	
3-4-UNC	76,2	6,35	50	83	258	40	42
3 1/4-4-UNC	82,55			86	261		
3 1/2-4-UNC	88,9		89	279	45	46	
3 3/4-4-UNC	95,25						
4-4-UNC	101,6						

1) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

2) In accordance with ISO 237, the tolerance is enlarged to h12 including errors of form of the square and of its position to the shank.

3.2.2 Relieved-shank taps for "Unified fine" series threads

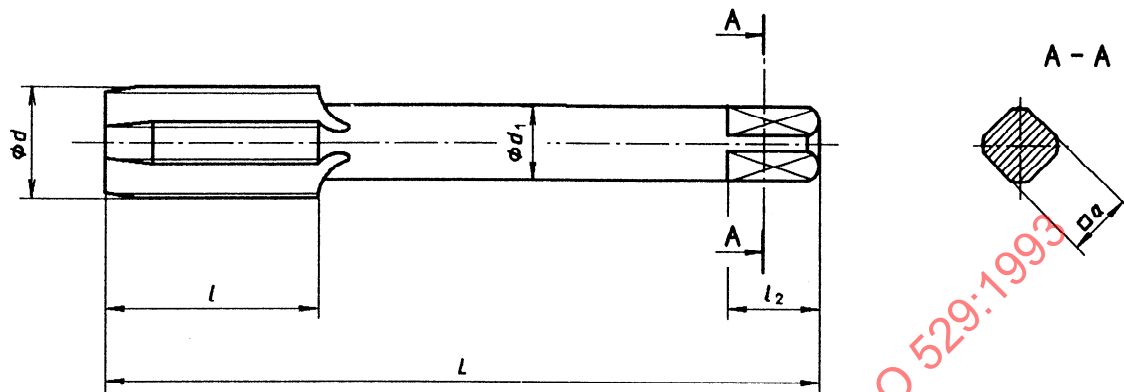

Dimensions in millimetres

Designation	d nom.	Pitch $\approx$	d_1 h9 ¹⁾	l max.	L h16	Square	
						a h11 ²⁾	l_2 $\pm 1,6$
1 1/8-12-UNF	28,575	2,117	20	37	127	16	20
1 1/4-12-UNF	31,75		22,4		137	18	22
1 3/8-12-UNF	34,925		25	39	144	20	24
1 1/2-12-UNF	38,1		28		149	22,4	26


1) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

2) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position to the shank.

Section 4: Non-recommended inch threads

4.1 “British Standard Whitworth” (BSW) and “British Standard Fine” (BSF) threads

4.1.1 Full-diameter shank taps with recess

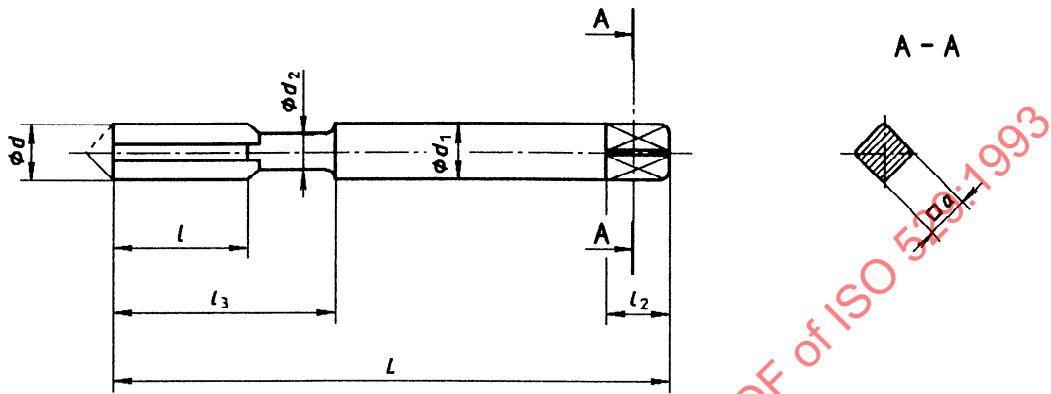

Dimensions in millimetres


Designation		d	Pitch		h9 ²⁾	l ¹⁾ max.	L h16	d ₂ ¹⁾ min.	l ₃	Square	
BSW	BSF		BSW	BSF						a h11 ³⁾	l ₂ ± 0,8
1/8-40-BSW	—	3,175	0,635	—	3,15	11	48	2,36	18	2,5	5
3/16-24-BSW	3/16-32-BSF	4,762	1,058	0,794	5	16	58	3,55	25	4	7
—	7/32-28-BSF	5,556	—	0,907	5,6	17	62	4,25	26	4,5	
1/4-20-BSW	1/4-26-BSF	6,35	1,27	0,977	6,3	19	66	4,5	30	5	8
—	9/32-26-BSF	7,144	—		7,1			5,6		5,6	
5/16-18-BSW	5/16-22-BSF	7,938	1,411	1,154	8	22	72	6	35	6,3	9
3/8-16-BSW	3/8-20-BSF	9,525	1,588	1,27	10	24	80	7,5	39	8	11

1) The recess of full-diameter shank taps with recess is optional at the manufacturer’s discretion. If the recess is not required such taps shall have a thread length equal to

$$l + \frac{l_3 - l}{2}$$

2) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.
3) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

4.1.2 Relieved-shank taps

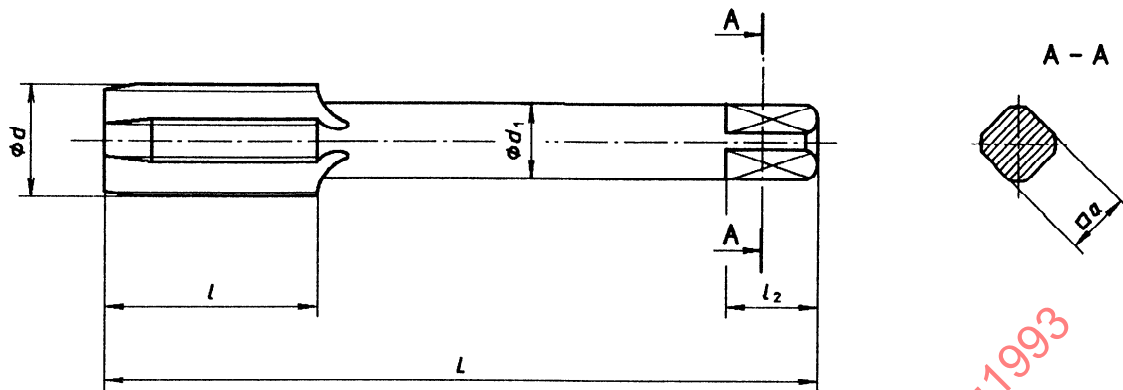

Dimensions in millimetres

Designation		d nom.	Pitch $\approx$		d_1 h9 ¹⁾	l max.	L h16	Square		
BSW	BSF		BSW	BSF				a h11 ²⁾	l_2	
									nom.	tol.
1/8-40-BSW	—	3,175	0,635	—	2,24	11	48	1,8	4	± 0,8
3/16-24-BSW	3/16-32-BSF	4,762	1,058	0,794	3,55	16	58	2,8	5	
—	7/32-28-BSF	5,556	—	0,907	4	17	62	3,15	6	
1/4-20-BSW	1/4-26-BSF	6,35	1,27	0,977	4,5	19	66	3,55		
—	9/32-26-BSF	7,144	—		5,6			4,5	7	
5/16-18-BSW	5/16-22-BSF	7,938	1,411	1,154	6,3	22	72	5	8	
3/8-16-BSW	3/8-20-BSF	9,525	1,588	1,27	7,1	24	80	5,6		
7/16-14-BSW	7/16-18-BSF	11,112	1,814	1,411	8	25	85	6,3	9	
1/2-12-BSW	1/2-16-BSF	12,7	2,117	1,588	9	29	89	7,1	10	
9/16-12-BSW	9/16-16-BSF	14,288			11,2	30	95	9	12	
5/8-11-BSW	5/8-14-BSF	15,875	2,309	1,814	12,5	32	102	10	13	
11/16-11-BSW	11/16-14-BSF	17,462			14	37	112	11,2	14	
3/4-10-BSW	3/4-12-BSF	19,05	2,54	2,117						
7/8-9-BSW	7/8-11-BSF	22,225	2,822	2,309	16	38	118	12,5	16	
1-8-BSW	1-10-BSF	25,4	3,175	2,54	18	45	130	14	18	

Designation		d nom.	Pitch $\approx$		d_1 h9 ¹⁾	l max.	L h16	Square		
BSW	BSF		BSW	BSF				a h11 ²⁾	l_2 nom. tol.	
1 1/8-7-BSW	1 1/8-9-BSF	28,575	3,629	2,822	20	48	138	16	20	± 1,6
1 1/4-7-BSW	1 1/4-9-BSF	31,75			22,4	51	151	18	22	
—	1 3/8-8-BSF	34,925	—	3,175	25	57	162	20	24	
1 1/2-6-BSW	1 1/2-8-BSF	38,1	4,233		28	60	170	22,4	26	
—	1 5/8-8-BSF	41,275	—							
1 3/4-5-BSW	1 3/4-7-BSF	44,45	5,08	3,629	31,5	67	187	25	28	
2-4 1/2-BSW	2-7-BSF	50,8	5,644		35,5	70	200	28	31	
2 1/4-4-BSW	2 1/4-6-BSF	57,15	6,35	4,233	40	76	221	31,5	34	
2 1/2-4-BSW	2 1/2-6-BSF	63,5					224			
2 3/4-3 1/2-BSW	2 3/4-6-BSF	69,85	7,257		45	79	234	35,5	38	
3-3 1/2-BSW	3-5-BSF	76,2		5,08	50	83	258	40	42	
3 1/4-3 1/4-BSW	3 1/4-5-BSF	82,55	5,644			56	86			
3 1/2-3 1/4-BSW	3 1/2-4 1/2-BSF	88,9								
3 3/4-3-BSW	3 3/4-4 1/2-BSF	95,25								
4-3-BSW	4-4 1/2-BSF	101,6	8,467							


1) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

2) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

NOTE 4 Some shank diameters are not in accordance with the table in annex A.

4.2 "British Association" (BA) threads

4.2.1 Full-diameter shank taps with plain connecting portion

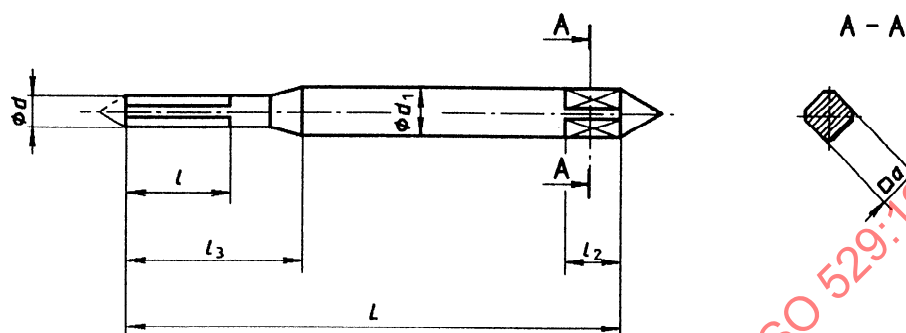

Dimensions in millimetres

Dimensions in millimetres

Designation	<i>d</i> nom.	Pitch	<i>d</i> ₁ h9 ²⁾	<i>l</i> ¹⁾ max.	<i>L</i> h16	<i>l</i> ₃	Square	
							<i>a</i> h11 ³⁾	<i>l</i> ₂ ± 0,8
BA No. 14	1	0,23	2,5	5,5	38,5	10	2	4
BA No. 13	1,2	0,25		8	41	11,5		
BA No. 12	1,3	0,28				13		
BA No. 11	1,5	0,31				13,5		
BA No. 10	1,7	0,35						
BA No. 9	1,9	0,39						
BA No. 8	2,2	0,43	2,8	9,5	44,5	15,5	2,24	5
BA No. 7	2,5	0,48						
BA No. 6	2,8	0,53						


1) Manufacturers if they wish may increase the thread length to

$$l + \frac{l_3 - l}{2}$$

2) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

3) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

4.2.2 Full-diameter shank taps with recess

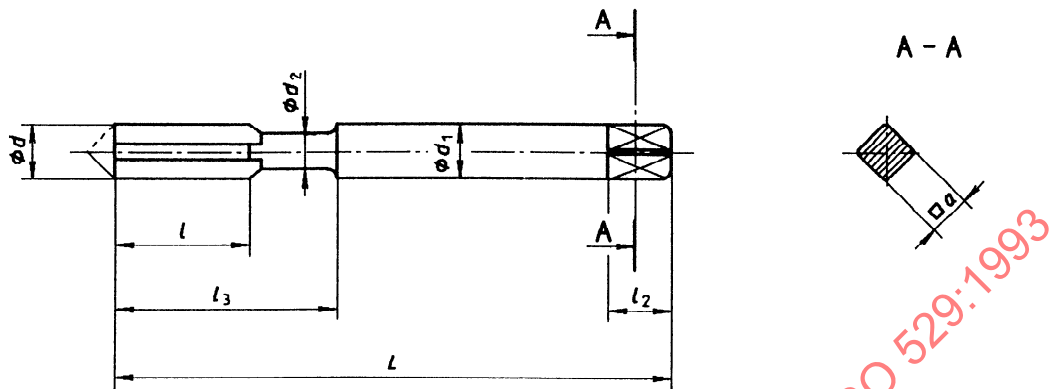

Dimensions in millimetres


Designation	d nom.	Pitch	d ₁ h9 ²⁾	l ¹⁾ max.	L h16	d ₂ ¹⁾ min.	l ₃	Square	
								a h11 ³⁾	l ₂ ± 0,8
BA No. 5	3,2	0,59	3,15	11	48	2,12	18	2,5	5
BA No. 4	3,6	0,66	3,55	13	50	2,5	20	2,8	
BA No. 3	4,1	0,73	4,5		53	3,15	21	3,55	6
BA No. 2	4,7	0,81	5	16	58	3,55	25	4	7
BA No. 1	5,3	0,9	5,6	17	62	4,25	26	4,5	
BA No. 0	6	1	6,3	19	66	4,5	30	5	8

1) The recess of full-diameter shank taps with recess is optional at the manufacturer's discretion. If the recess is not required such taps shall have a thread length equal to

$$l + \frac{l_3 - l}{2}$$

2) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.
3) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

4.2.3 Relieved-shank taps

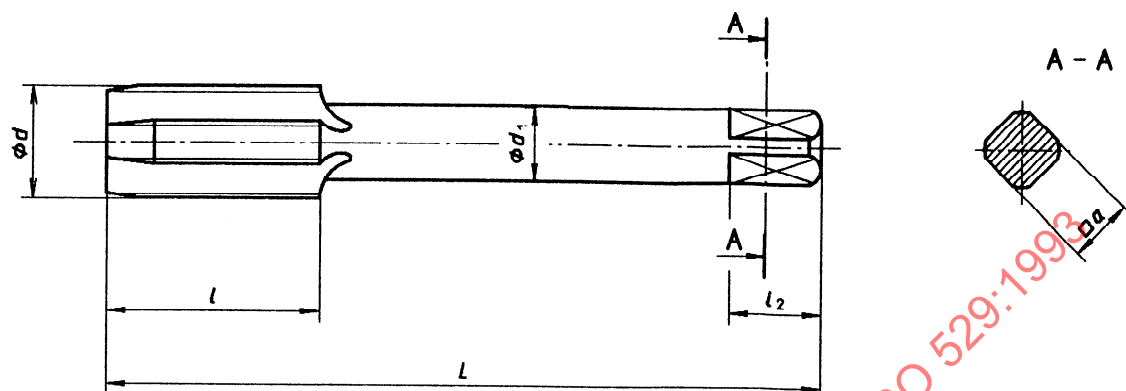

Dimensions in millimetres

Designation	d nom.	Pitch	d ₁ h9 ¹⁾	l max.	L h16	Square	
						a h11 ²⁾	l ₂ ± 0,8
BA No. 5	3,2	0,59	2,24	11	48	1,8	4
BA No. 4	3,6	0,66	2,5	13	50	2	
BA No. 3	4,1	0,73	3,15		53	2,5	5
BA No. 2	4,7	0,81	3,55	16	58	2,8	
BA No. 1	5,3	0,9	4	17	62	3,15	6
BA No. 0	6	1	4,5	19	66	3,55	

1) In accordance with ISO 237, tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

2) In accordance with ISO 237, the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

NOTE 5 Some shank diameters are not in accordance with the table in annex A.