

INTERNATIONAL STANDARD

ISO
5468

Second edition
1992-02-01

Rotary and rotary impact masonry drill bits with hardmetal tips — Dimensions

*Forets pour bâtiment, à rotation et percussion, à plaquettes en métal-dur
(carbures métalliques) — Dimensions*



Reference number
ISO 5468:1992(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 5468 was prepared by Technical Committee ISO/TC 29, *Small tools*, Sub-Committee SC 2, *Drills and reamers*.

This second edition cancels and replaces the first edition (ISO 5468:1977), of which it constitutes a technical revision.

© ISO 1992

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Introduction

This International Standard has been prepared with due regard to the relationship between the masonry drill bits themselves, their tolerances and the holes which they produce in order that plugs and fixings may be positively located.

Account has been taken of the sizes which are in the greatest demand and the range of diameters shown has been established only after several years of market research. Due recognition has also been given to the requirements of modern drilling technology, particularly the development from rotary to rotary impact drilling.

STANDARDSISO.COM : Click to view the full PDF of ISO 5468:1992

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 5468:1992

Rotary and rotary impact masonry drill bits with hardmetal tips — Dimensions

1 Scope

This International Standard specifies the dimensions, in millimetres, of rotary and rotary impact masonry drill bits with hardmetal tips, having diameters in the range 4 mm to 25 mm inclusive and overall and working lengths in the series short, long and extra long.

It does not apply to hammer drills.

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards


are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 286-1:1988, *ISO system of limits and fits — Part 1: Bases of tolerances, deviations and fits.*

3 Dimensions

The dimensions and tolerances are shown in figure 1 and given in table 1.

The tolerance for the cutting diameter, d , is +IT14 maximum value and +IT12 minimum value on diameter d (see ISO 286-1).

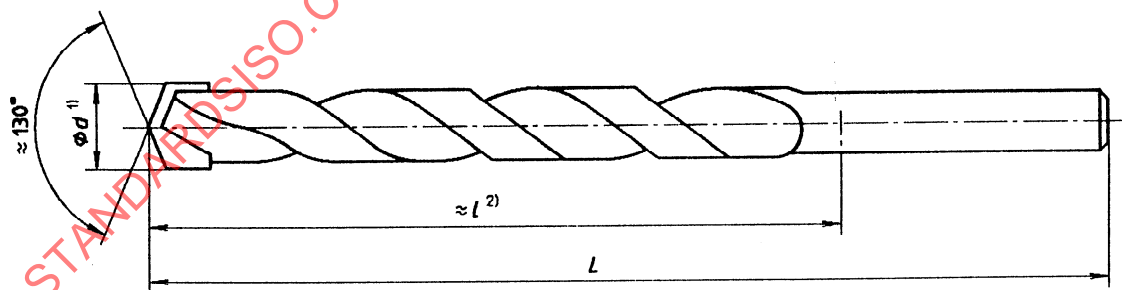

1) The diameter d of the drill is measured across the corner of the hardmetal tip after removal of paint or protective coating.

2) The length l corresponds to the overhang length of the chuck.

Figure 1

Table 1

nom.	<i>d</i> tol. + IT14 + IT12	Short series		Long series		Extra long series (wall break-through)				Chuck size ¹⁾
		Overall length <i>L</i>	Working length $\approx l$	Overall length <i>L</i>	Working length $\approx l$	Overall length <i>L</i>	Working length $\approx l$	Overall length <i>L</i>	Working length $\approx l$	
4	+ 0,30 + 0,12	75	39							10
4,5										10 or 13
5		85	39							
5,5				150	85					
6										
6,5	+ 0,36 + 0,15	100	54							10, 13 or 16
7										
8										
9		120	80	200	135					
10										
11	+ 0,43 + 0,18									
12				220	150	400	350	600	550	
13						—	—	—	—	
14		150	90							
15										
16										
18						400	350	600	550	
20										
22	+ 0,52 + 0,21	160	100							13 or 16
24						—	—	—	—	
25								600	550	

1) Required size depending upon the actual diameter of the shank.