
**Tool holders with rectangular shank
for indexable inserts —**

**Part 1:
General survey, correlation and
determination of dimensions**

*Porte-plaquette à queue rectangulaire pour plaquettes amovibles —
Partie 1: Vue d'ensemble, corrélation et détermination des dimensions*



STANDARDSISO.COM : Click to view the full PDF of ISO 5610-1:2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Survey	2
4 Dimensions	6
4.1 Cross section and length, l_1	6
4.2 Head length, l_2	6
4.3 Dimension f	7
5 Determination of dimensions	7
5.1 Cutting edge corner	7
5.2 Corner radius, r_e , of the master indexable inserts	10
5.3 Length, l_1	11
5.4 Dimension f	11
5.5 Height, h_1	11
5.6 Tolerances	12
5.7 Dimension a	12
5.8 Correction values x and y	12
Annex A (informative) Relationship between designations in ISO 5610 (all parts) and ISO/ TS 13399-2 and ISO/TS 13399-3	16
Bibliography	17

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 29, *Small tools*, Subcommittee SC 9, *Tools with defined cutting edges, cutting items*.

This second edition of ISO 5610-1 cancels and replaces the first edition (ISO 5610-1:2010), of which it constitutes a minor revision.

ISO 5610 consists of the following parts, under the general title *Tool holders with rectangular shank for indexable inserts*:

- *Part 1: General survey, correlation and determination of dimensions*
- *Part 2: Style A*
- *Part 3: Style B*
- *Part 4: Style D*
- *Part 5: Style F*
- *Part 6: Style G*
- *Part 7: Style J*
- *Part 8: Style K*
- *Part 9: Style L*
- *Part 10: Style N*
- *Part 11: Style R*
- *Part 12: Style S*
- *Part 13: Style T*

- *Part 14: Style H*
- *Part 15: Style V*

STANDARDSISO.COM : Click to view the full PDF of ISO 5610-1:2014

STANDARDSISO.COM : Click to view the full PDF of ISO 5610-1:2014

Tool holders with rectangular shank for indexable inserts —

Part 1: General survey, correlation and determination of dimensions

1 Scope

This part of ISO 5610 specifies tool holders with rectangular shank for indexable inserts and specifies their styles in relation to their dimensions according to ISO 5610-2, ISO 5610-3, ISO 5610-4, ISO 5610-5, ISO 5610-6, ISO 5610-7, ISO 5610-8, ISO 5610-9, ISO 5610-10, ISO 5610-11, ISO 5610-12, ISO 5610-13, ISO 5610-14, and ISO 5610-15.

These tool holders are primarily intended for indexable inserts made of hard metal, ceramic, or other cutting materials intended to be mounted by clamping and used for turning operations. This part of ISO 5610 is general and is intended to be used with ISO 5610-2, ISO 5610-3, ISO 5610-4, ISO 5610-5, ISO 5610-6, ISO 5610-7, ISO 5610-8, ISO 5610-9, ISO 5610-10, ISO 5610-11, ISO 5610-12, ISO 5610-13, ISO 5610-14, and ISO 5610-15.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3002-1, *Basic quantities in cutting and grinding — Part 1: Geometry of the active part of cutting tools — General terms, reference systems, tool and working angles, chip breakers*

ISO 5608, *Turning and copying tool holders and cartridges for indexable inserts — Designation*

ISO 5610-2, *Tool holders with rectangular shank for indexable inserts — Part 2: Style A*

ISO 5610-3, *Tool holders with rectangular shank for indexable inserts — Part 3: Style B*

ISO 5610-4, *Tool holders with rectangular shank for indexable inserts — Part 4: Style D*

ISO 5610-5, *Tool holders with rectangular shank for indexable inserts — Part 5: Style F*

ISO 5610-6, *Tool holders with rectangular shank for indexable inserts — Part 6: Style G*

ISO 5610-7, *Tool holders with rectangular shank for indexable inserts — Part 7: Style J*

ISO 5610-8, *Tool holders with rectangular shank for indexable inserts — Part 8: Style K*

ISO 5610-9, *Tool holders with rectangular shank for indexable inserts — Part 9: Style L*

ISO 5610-10, *Tool holders with rectangular shank for indexable inserts — Part 10: Style N*

ISO 5610-11, *Tool holders with rectangular shank for indexable inserts — Part 11: Style R*

ISO 5610-12, *Tool holders with rectangular shank for indexable inserts — Part 12: Style S*

ISO 5610-13, *Tool holders with rectangular shank for indexable inserts — Part 13: Style T*

ISO 5610-14, Tool holders with rectangular shank for indexable inserts — Part 14: Style H

ISO 5610-15, Tool holders with rectangular shank for indexable inserts — Part 15: Style V

3 Survey

The survey of the tool holders with rectangular shank cross section shall be as given in [Table 1](#). The tool holders with rectangular shank cross section and their corresponding letter symbols and shank sizes shall be in accordance with ISO 5610-2, ISO 5610-3, ISO 5610-4, ISO 5610-5, ISO 5610-6, ISO 5610-7, ISO 5610-8, ISO 5610-9, ISO 5610-10, ISO 5610-11, ISO 5610-12, ISO 5610-13, ISO 5610-14, and ISO 5610-15.

The designation code shall be as given in ISO 5608.

Table 1 — Tool holders with rectangular shanks

Dimensions in millimetres






Style of tool holder	Illustration	Symbols for the cross section											Dimensions in
		$h_2 \times b$											
		0808	1010	1212	1616	2020	2525	3225	3232	4032	4040	5050	
A			.										ISO 5610-2
				.	.	.	.	.	.		.		
B		.	.										ISO 5610-3
				.	.	.	.	.	.		.	.	
D			.	.	.	.	.	.					ISO 5610-4
		.	.	.	.	.	.	.	.		.		

Table 1 — (continued)

Dimensions in millimetres

Style of tool holder	Illustration	Symbols for the cross section											Dimensions in
		$h_2 \times b$											
		0808	1010	1212	1616	2020	2525	3225	3232	4032	4040	5050	
F		.	.										ISO 5610-5
				.	.	.	.	.	.		.		
G		.	.										ISO 5610-6
				.	.	.	.	.	.		.	.	
H			.	.	.	.	.	.					ISO 5610-14
				.	.	.	.	.					

Table 1 — (continued)

Dimensions in millimetres
















Style of tool holder	Illustration	Symbols for the cross section											Dimensions in
		$h_2 \times b$											
		0808	1010	1212	1616	2020	2525	3225	3232	4032	4040	5050	
J		.	.	.	.	.	.	.		.			ISO 5610-7
						.	.	.		.			
				.	.	.	.	.					
K		.	.									ISO 5610-8	
					.	.	.	.	.		.		
L		.	.	.	.	.	.	.	.		.	ISO 5610-9	
		.	.	.	.	.	.	.	.				

Table 1 — (continued)

Dimensions in millimetres

Style of tool holder	Illustration	Symbols for the cross section											Dimensions in
		$h_2 \times b$											
		0808	1010	1212	1616	2020	2525	3225	3232	4032	4040	5050	
N		.	.	.	.	.	.	.		.			ISO 5610-10
							.	.		.			
R				.	.	.	.	.	.		.	.	ISO 5610-11
S		.	.	.	.	.	.	.					ISO 5610-12
				.	.	.	.	.	.		.	.	
		.	.	.	.	.	.	.	.		.		
T				.	.	.	.	.	.		.		ISO 5610-13
V				.	.	.	.	.					ISO 5610-15
NOTE “.” represents standardized letter symbols and shank sizes. Cells left blank represent non-standardized letter symbols and shank sizes.													
a Primary direction of feed.													

4 Dimensions

4.1 Cross section and length, l_1

The dimensions of the cross section, depending on the length, l_1 , and height, h_1 , of the cutting edge shall be in accordance with [Figure 1](#) and [Table 2](#).

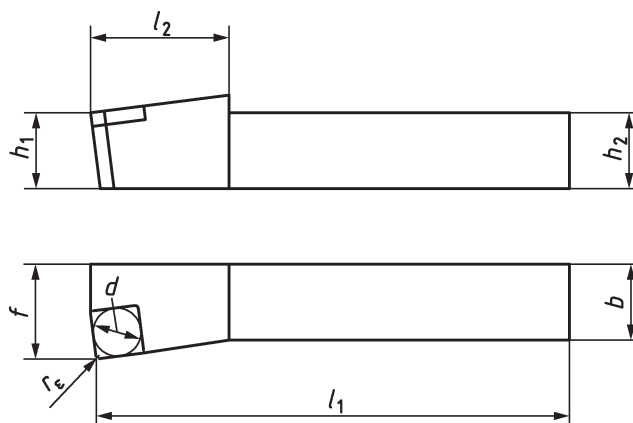


Figure 1 — Tool holder style K

Table 2 — Dimensions of the cross section

Dimensions in millimetres

h_1 js13	h_2 h13	b^a h13		l_1 k16	
		Series 1	Series 2	Long	Short
8	8	8	—	60	40
10	10	10	8	70	50
12	12	12	10	80	60
16	16	16	12	100	70
20	20	20	16	125	80
25	25	25	20	150	100
32	32	32	25	170	125
40	40	40	32	200	150
50	50	50	40	250	—

^a Series 1: $b = h_2$; Series 2: b approximately $0,8h_2$.

4.2 Head length, l_2

The maximum head length, l_2 , depending on the diameter, d , of the inscribed circle of the indexable inserts, shall be in accordance with Figure 1 and Table 3.

The head length given in Table 3 shall not apply to tool holders with indexable insert styles D and V.

Table 3 — Head length

Dimensions in millimetres

d	l_2 max.
6,35	25
7,94	28
9,525	32
12,7	36

d	l_2 max.
15,875	40
19,05	45
25,4	50

4.3 Dimension f

The dimension f , depending on the width, b , of the cross section and the shape of the tool holder, shall be in accordance with [Table 4](#).

Table 4 — Dimension f

Dimensions in millimetres

b	f for tool holder styles					
	D, V	N	B, T	A	R	F, G, H, J, K, L, S
	$\pm 0,25$	$+0,5$ 0	$+0,5$ 0	$+0,5$ 0	$+0,5$ 0	$+0,5$ 0
8	4		7	8,5	9	10
10	5		9	10,5	11	12
12	6		11	12,5	13	16
16	8		13	16,5	17	20
20	10		17	20,5	22	25
25	12,5		22	25,5	27	32
32	16		27	33	35	40
40	20		35	41	43	50
50	25		43	51	53	60

5 Determination of dimensions

5.1 Cutting edge corner

5.1.1 Specified point K

Case 1: The specified point K shall be defined as follows.


Consider planes P_f (assumed working plane) and P_s (tool cutting edge plane), as defined in ISO 3002-1, for a selected point on the major cutting edge (e.g. point of tangency of major cutting edge with inscribed circle).

- For $\kappa_r \leq 90^\circ$, point K shall be defined as the intersection of plane P_s , a plane parallel to plane P_f tangent to the corner radius, and a plane containing the tool face A_γ (see [Figures 2](#) and [3](#)).
- For $\kappa_r > 90^\circ$, point K shall be defined as the intersection of a plane parallel to plane P_f tangent to the corner radius, a plane perpendicular to plane P_f tangent to the corner radius, and a plane containing the tool face A_γ (see [Figures 4](#) and [5](#)).

For tool holders style S, the side rake shall be equal to the back rake.

Case 2: For special cases of tool holders styles D and S with round indexable inserts, specified point K shall be defined as follows.


- a) For tool holders style D (see [Figure 6](#)), point K shall be defined as the intersection of
 - a plane parallel to P_f passing through the axis of the indexable insert,
 - a plane perpendicular to P_f and tangential to the cutting edge, and
 - a plane containing A_y .
- b) For tool holders style S (see [Figure 7](#)), there are two cases of point K . These shall be defined by two planes, P_f , in directions of two main perpendicular feeds, which are tangential to the cutting edge of the indexable insert.

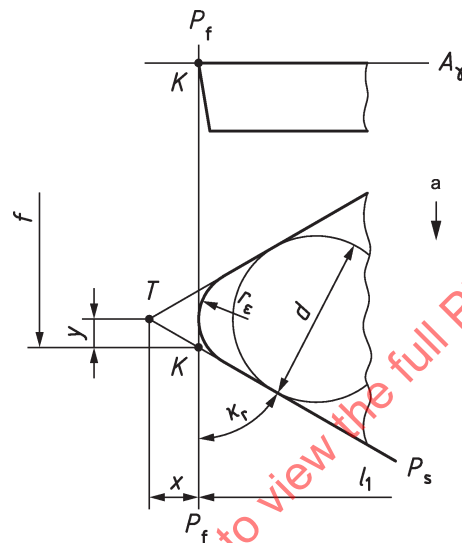

Key

- a Primary direction of feed.


Figure 2 — Cutting edge angle $\kappa_r \leq 90^\circ$, with transverse feed

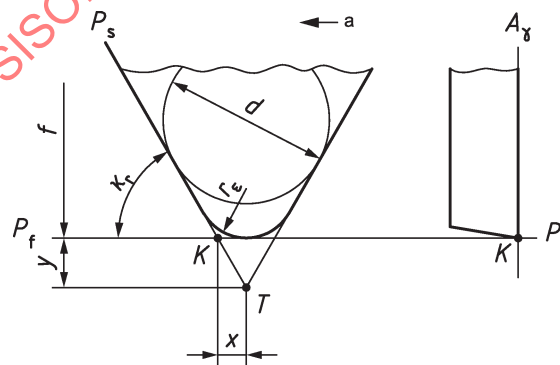

Key

- a Primary direction of feed.


Figure 3 — Cutting edge angle $\kappa_r \leq 90^\circ$, with longitudinal feed

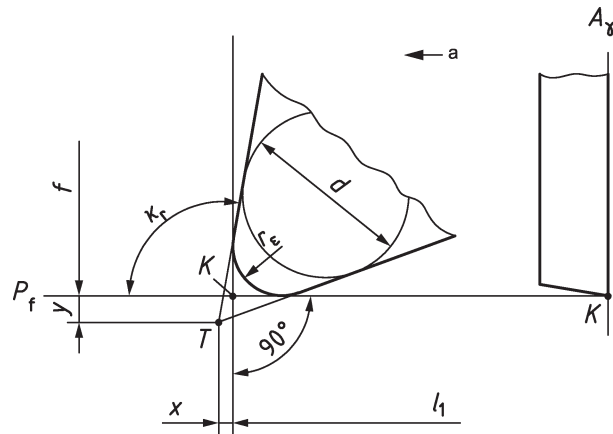

Key

a Primary direction of feed.


Figure 4 — Cutting edge angle $\kappa_r > 90^\circ$, with longitudinal feed

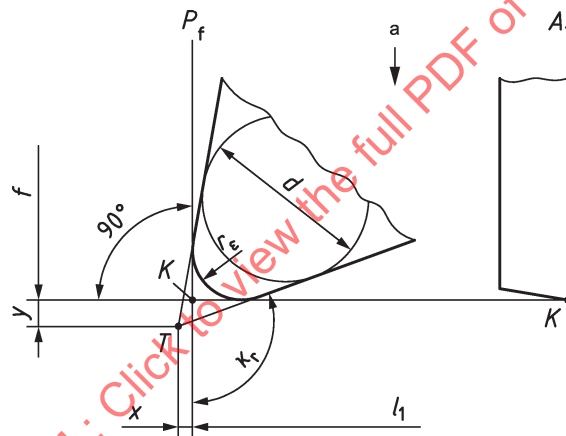

Key

a Primary direction of feed.


Figure 5 — Cutting edge angle $\kappa_r > 90^\circ$, with transverse feed

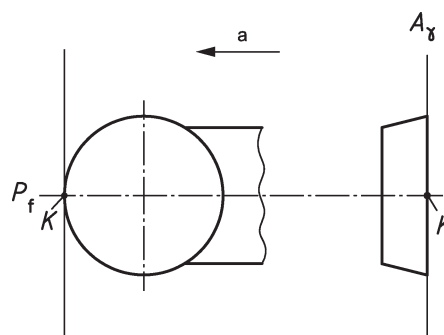

Key

a Primary direction of feed.

Figure 6 — Point *K* for tool style D with round indexable insert

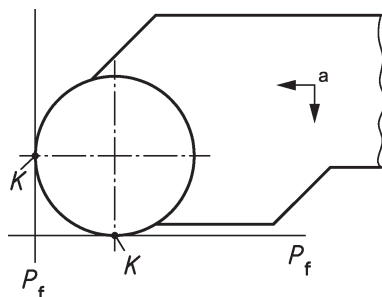

Key

a Primary direction of feed.

Figure 7 — Point K for tool style S with round indexable insert

5.1.2 Theoretical sharp corner, T

The intersection of the theoretical extensions of the major cutting edge and minor cutting edge shall be considered as the theoretical sharp cutting edge corner T (see [Figures 2 to 5](#)).

NOTE The position of the theoretical corner, T , is independent of the corner radius, r_ϵ , of the indexable insert.

5.2 Corner radius, r_ϵ , of the master indexable inserts

The values of the corner radius, r_ϵ , of the master indexable insert (master gauge) used for the determination and testing of length, l_1 , dimension f , and height, h_1 shall be in accordance with [Table 5](#).

Table 5 — Corner radius

Dimensions in millimetres

d	r_ϵ Nominal dimension ^a
6,35	0,4
7,94	
9,525	
12,7	0,8
15,875	
19,05	1,2
25,4	
	2,4

^a The correction values x and y are derived from the accurate values of the corner radii $r_\epsilon = 0,397$ mm, 0,794 mm, 1,191 mm, and 2,381 mm, which correspond to the inch dimensions.

The corner radius, r_ϵ , of the master indexable insert shall be a function of the size of the indexable insert associated to the tool holder and, therefore, it shall be related to the diameter of the inscribed circle as shown in [Table 5](#).

5.3 Length, l_1

The length, l_1 (for values, see [Table 2](#)), shall be the distance between the specified point K and the shank end (see [Figures 1 to 5](#) and the illustrations in [Table 6](#)), measured on a master indexable insert with corner radius, r_ϵ , in accordance with [5.2](#).

For tool holders with indexable inserts with a corner radius, r_ϵ deviating from [Table 5](#), the modified length, l_1 , shall be determined with correction value x as shown in [Figures 2 to 5](#).

Table 5 (continued)

The correction value x (see [Table 6](#)) corresponds to the distance, measured parallel to the shank, between the specified point K and the theoretical corner, T .

The modified length shall be obtained from the length l_1 given in [Table 2](#) and the difference between the values x for the new corner radius and the corner radius given in [Table 5](#).

5.4 Dimension f

Dimension f (for values, see [Table 4](#)) shall be the distance between the specified point K and the rear backing surface of the tool holder (see [Figures 1](#) to [5](#) and the illustrations in [Table 6](#)), measured on a master indexable insert with corner radius, r_e , in accordance with [5.2](#).

Exceptions to this definition are symmetrical tool holders styles D and V, for which the values given in [Table 4](#) for dimension f shall apply to the distance measured between the theoretical cutting edge corner, T , and the rear backing surface of the tool holders (see [Figures 2](#) and [3](#)).

For tool holders style D, the functional dimension relating to the cutting edge corner, K , shall be either the dimension $f + y$ or $f - y$, where y shall be taken from [Table 6](#).

For tool holders with indexable inserts with a corner radius, r_e , deviating from [Table 5](#), the modified dimension f shall be determined with correction value y as shown in [Figures 2](#) to [5](#).

Correction value y corresponds to the distance between the specified point K and the theoretical cutting edge corner, T , measured transverse to the shank.

The modified dimension f shall be obtained from the value given in [Table 4](#) and the difference between the y -values for the new corner radius and the corner radius given in [Table 5](#).

5.5 Height, h_1

The height, h_1 (for values, see [Table 2](#)), shall be the distance between the specified point K and the base of the tool holder (see [Figure 1](#)), measured on a master indexable insert and on a master shim, if applicable.

5.6 Tolerances

The tolerances given in [Tables 2](#) and [4](#) refer to length, l_1 , dimension f , and height, h_1 , measured on a master indexable insert and a master shim, if applicable. Therefore, the tolerances for l_1 , f , and h_1 shall not include the tolerances for indexable insert and shim.

5.7 Dimension a

5.7.1 General

Dimension a , shall be related to the determination of the overall width and overall length of tool holders.

In general, the overall width corresponds to dimension f or the shank width and the overall length corresponds to dimension l_1 , with the exception of tool holders of styles defined in [5.7.2](#) and [5.7.3](#).

5.7.2 Styles R and T

For styles R and T, the overall width of the tool holder shall be the sum of the values for f and a .

Dimension a is defined as the distance between the specified point K and the tangent to the corner radius of the indexable insert, measured perpendicular to the shank length (see the illustrations in [Table 6](#)).

5.7.3 Styles K and S

For styles K and S, the overall length of the tool holder shall be the sum of the values for l_1 and a .

Dimension a shall be defined as the distance between the specified point K and the tangent on the corner radius of the indexable insert, measured parallel to the shank length (see the illustrations in Table 6).

5.7.4 Values for dimension a

The values for dimension a shall be given in the respective dimension standards and apply to indexable inserts with corner radii in accordance with 5.2, with orthogonal rake angle $\gamma_0 = 0^\circ$ and inclination angle $\lambda_s = 0^\circ$.

For tool holders with indexable inserts with corner radii deviating from the values given in Table 5, the modified dimension a shall be determined for styles R and T with correction value y and for styles K and S with correction value x (for values for x and y , see Table 6).

For the rake angle γ_0 and the inclination angle λ_s varying between -6° and $+6^\circ$, variations of the values for a are less than 0,1 mm and, thus, negligible.

5.8 Correction values x and y

The correction values x and y given in Table 6 shall apply to orthogonal rake angle $\gamma_0 = 0^\circ$ and inclination angle $\lambda_s = 0^\circ$. Orthogonal rake angles γ_0 and inclination angles λ_s varying between -6° and $+6^\circ$ result in variations from the x - and y -values in the range of 0,001 mm to 0,01 mm, which are significantly smaller than the tolerances for l_1 , f , and h_1 . If necessary, the correction values shall be determined.

Table 6 — Correction values

Dimensions in millimetres

Style	Illustration	r_E	x	y	Style	Illustration	r_E	x	y
A and G		0,2	0,039	—	D		0,2	0,084	0,084
		0,4	0,076	—			0,4	0,164	0,164
		0,8	0,152	—			0,8	0,329	0,329
		1,2	0,228	—			1,2	0,493	0,493
		1,6	0,456	—			1,6	0,658	0,658
	rhombic-shaped insert	2,4	0,456	—		square-shaped insert	2,4	0,986	0,986
		0,2	0,149	—	F		0,2	—	0,039
		0,4	0,291	—			0,4	—	0,076
		0,8	0,581	—			0,8	—	0,152
		1,2	0,872	—			1,2	—	0,228
		1,6	1,162	—			1,6	—	0,304
	triangular-shaped insert	2,4	1,743	—		rhombic-shaped insert	2,4	—	0,456
B		0,2	0,014	0,004			0,2	—	0,149
		0,4	0,028	0,007			0,4	—	0,291
		0,8	0,055	0,015			0,8	—	0,581
		1,2	0,083	0,022			1,2	—	0,872
		1,6	0,110	0,029			1,6	—	1,162
	rhombic-shaped insert	2,4	0,165	0,044		triangular-shaped insert	2,4	—	1,743

Style	Illustration	r_E	x	y	Style	Illustration	r_E	x	y
B and R		0,2	0,046	0,012	H		0,2	0,108	0,108
		0,4	0,089	0,024			0,4	0,211	0,211
		0,8	0,178	0,048			0,8	0,422	0,422
		1,2	0,268	0,072			1,2	0,633	0,633
		1,6	0,357	0,096			1,6	0,844	0,844
	square-shaped insert	2,4	0,535	0,147		rhombic-shaped insert	2,4	1,265	1,265

Table 6 — (continued)

Dimensions in millimetres

Style	Illustration	r_E	x	y	Style	Illustration	r_E	x	y
H		0,2	0,342	0,180	K		0,2	0,004	0,014
		0,4	0,684	0,360			0,4	0,007	0,028
		0,8	1,369	0,721			0,8	0,015	0,055
		1,2	2,053	1,081			1,2	0,022	0,083
		1,6	2,738	1,441			1,6	0,029	0,110
	rhombic-shaped insert	2,4	4,107	2,162		rhombic-shaped insert	2,4	0,044	0,165
J		0,2	0,176	0,020	L		0,2	0,012	0,046
		0,4	0,344	0,039			0,4	0,024	0,089
		0,8	0,687	0,079			0,8	0,048	0,178
		1,2	1,031	0,118			1,2	0,072	0,268
		1,6	1,375	0,157			1,6	0,096	0,357
	rhombic-shaped insert	2,4	2,062	0,236		square-shaped insert	2,4	0,143	0,535
J		0,2	0,138	0,018	L		0,2	0,020	0,020
		0,4	0,269	0,035			0,4	0,040	0,040
		0,8	0,538	0,071			0,8	0,079	0,079
		1,2	0,806	0,106			1,2	0,119	0,119
		1,6	1,075	0,142			1,6	0,159	0,159
	triangular-shaped insert	2,4	1,613	0,213		rhombic-shaped insert	2,4	0,238	0,238
J		0,2	0,420	0,033	L		0,2	0,020	0,020
		0,4	0,840	0,065			0,4	0,040	0,040
		0,8	1,680	0,131			0,8	0,079	0,079
		1,2	2,519	0,196			1,2	0,119	0,119
		1,6	3,358	0,261			1,6	0,159	0,159
	rhombic-shaped insert	2,4	5,038	0,392		hexagonal-shaped insert	2,4	0,238	0,238