



Textile machinery and accessories — Heald frames — Co-ordinated dimensions in relation to the pitch of the harness

Matériel pour l'industrie textile — Cadres de lisses — Coordination des dimensions en fonction de la division du harnais

First edition — 1982-12-01

STANDARDSISO.COM : Click to view the full PDF of ISO 569:1982

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 569 was developed by Technical Committee ISO/TC 72, *Textile machinery and allied machinery and accessories*, and was circulated to the member bodies in September 1981.

It has been approved by the member bodies of the following countries :

Australia	Germany, F.R.	Spain
Belgium	India	Switzerland
Brazil	Ireland	Turkey
Bulgaria	Japan	United Kingdom
China	Korea, Rep. of	USSR
Czechoslovakia	Poland	Yugoslavia
Egypt, Arab Rep. of	Romania	
France	South Africa, Rep. of	

No member body expressed disapproval of the document.


This International Standard cancels and replaces ISO Recommendation R 569-1967, of which it constitutes a technical revision.

Textile machinery and accessories — Heald frames — Co-ordinated dimensions in relation to the pitch of the harness

1 Scope and field of application

This International Standard co-ordinates the dimensions of heald frames and the pitch of the harness.

2 Dimensions

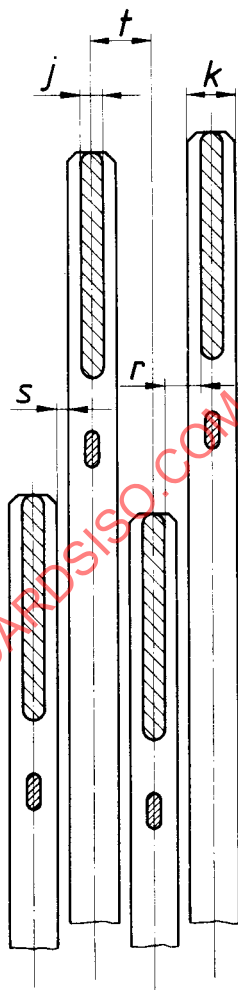

- t = Pitch of the harness¹⁾
- k = Thickness of lateral supports
- j = Thickness of frame staves
- j_1 = Thickness of wooden frame staves
- j_2 = Thickness of metal frame staves
- r = Clearance between frame staves
- r_1 = Clearance between wooden frame staves
- r_2 = Clearance between metal frame staves
- s = Clearance between lateral supports

1) The pitch of the harness is the centre-to-centre dimension between the heald frames on a loom or weaving machine and corresponds, as a rule, to the pitch of the shedding motion.