



Road vehicles — Ignition systems —

Part 2:

Electrical performance and function test methods

TECHNICAL CORRIGENDUM 1

Véhicules routiers — Systèmes d'allumage

Partie 2: Performances électriques et méthodes d'essai de fonctionnement


RECTIFICATIF TECHNIQUE 1

Technical Corrigendum 1 to International Standard ISO 6518-2:1995 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 1, *Ignition equipment*.

Page 5

Figure 3

Replace the existing figure 3 with the following figure 3.

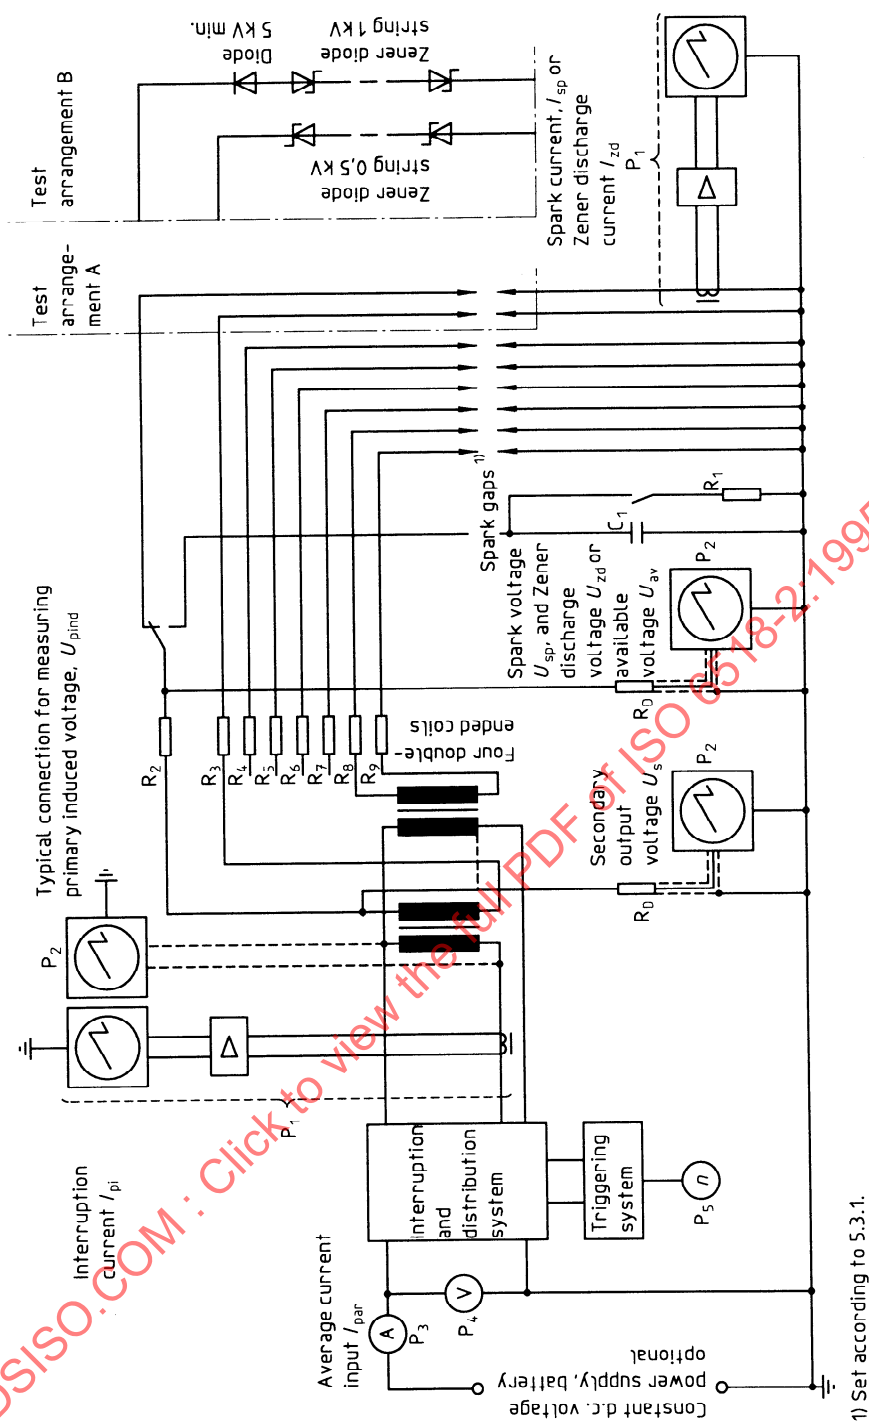

Key

P ₁	current probe, amplifier and oscilloscope	C ₁	load capacity
P ₂	voltage-measuring oscilloscope	R ₁	load resistor
P ₃	d.c. ammeter	R ₂ to R ₉	suppression impedances (the current and resistance of which are fixed by agreement between the manufacturer and the user)
P ₄	d.c. voltmeter		
P ₅	tachometer (crankshaft rotational frequency signal)	R _D	voltage probe

NOTES

- 1 For double-ended coils, secondary outlets shall be tested at high voltage.
- 2 An example of an eight-cylinder system is shown.

Figure 3 — Test circuit for static ignition systems with double-ended coils

Page 9

Subclause 5.3.2

Insert the word “probe” in the first sentence of the last paragraph, to read “The oscilloscope P_2 and the voltage probe R_D are used...”.

STANDARDSISO.COM : Click to view the full PDF of ISO 6518-2:1995/Cor 1:1997