

---

---

**Road vehicles — Unscreened  
high-voltage ignition cable assemblies —  
Test methods and general requirements**

*Véhicules routiers — Assemblages de câbles d'allumage haute tension  
non blindés — Méthodes d'essai et exigences générales*

STANDARDSISO.COM : Click to view the full PDF of ISO 6856:2005



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 6856:2005

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 6856 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 1, *Ignition equipment*.

This third edition cancels and replaces the second edition (ISO 6856:1990), which has been technically revised.



# Road vehicles — Unscreened high-voltage ignition cable assemblies — Test methods and general requirements

## 1 Scope

This International Standard specifies test methods and general requirements for unscreened high-voltage ignition cable assemblies, and is applicable to all such assemblies used in road vehicle applications.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9227, *Corrosion tests in artificial atmospheres — Salt spray tests*

ISO 3808-2, *Road vehicles — Unscreened high-tension ignition cables — Part 2: Cable classes, types, applicable tests and special requirements*

## 3 Test methods

### 3.1 General

#### 3.1.1 Preconditioning

Precondition all test samples at  $(23 \pm 5)^\circ\text{C}$  and at 10 % to 75 % relative humidity for 24 h before starting any test sequence.

#### 3.1.2 General test conditions

All tests shall be carried out at an ambient temperature of  $(23 \pm 5)^\circ\text{C}$ , unless otherwise specified.

Each test sequence shall be started with unused test samples.

Cables shall be in accordance with ISO 3808-2, and the cable(s) used shall be noted in the test report.

Cable attachment shall be performed in accordance with customer requirements and/or industry specification.

During the whole test sequence, no lubrication or other additional means on the contact surface making possible better test results shall be permitted. Production-related remains of lubricants on the contacts are allowed.

### 3.1.3 Visual examination

#### 3.1.3.1 Test

Carry out visual examination with the naked eye, corrected, if necessary, to give normal strength of vision and normal colour perception, at the most favourable viewing distance and with suitable illumination.

#### 3.1.3.2 Requirements

Visual examination in accordance with 3.1.3.1 shall allow identification, appearance, workmanship and finish of the item to be checked against the relevant specification.

During visual examination, special care shall be taken to ensure that — as a minimum requirement — no cracking, significant discoloration, deformation or (where applicable) ingress of water is in evidence.

### 3.2 Insertion and removal forces of high-voltage connectors

#### 3.2.1 General

The insertion and removal forces shall be measured at an ambient temperature of  $(23 \pm 5) ^\circ\text{C}$ , using a gauge as shown in Figure 1, 2, 3 or 4 dependant on the high-voltage connector type.

The gauge and the connector to be measured shall be dry and clean.

Insertion and removal forces shall be the forces between the high-voltage terminal of the ignition coils, the distributors or the spark-plugs and the cable connector. Any other force from covers or boots shall not be taken into account.

Perform ten insertions and removals.

#### 3.2.2 Insertion force

The insertion force shall be measured at the first insertion.

Maximum value: 80 N

#### 3.2.3 Removal force

##### 3.2.3.1 Test

The removal force measurement shall be carried out by using a suitable test apparatus at a constant test speed of 100 mm/min or 200 mm/min or 500 mm/min. The exact speed used shall be agreed between customer and supplier and recorded in the test report.


The removal force shall be measured at the tenth removal.

##### 3.2.3.2 Requirements

Maximum value: 70 N

Minimum value: 20 N

Dimensions in millimetres  
Surface roughness values in micrometres

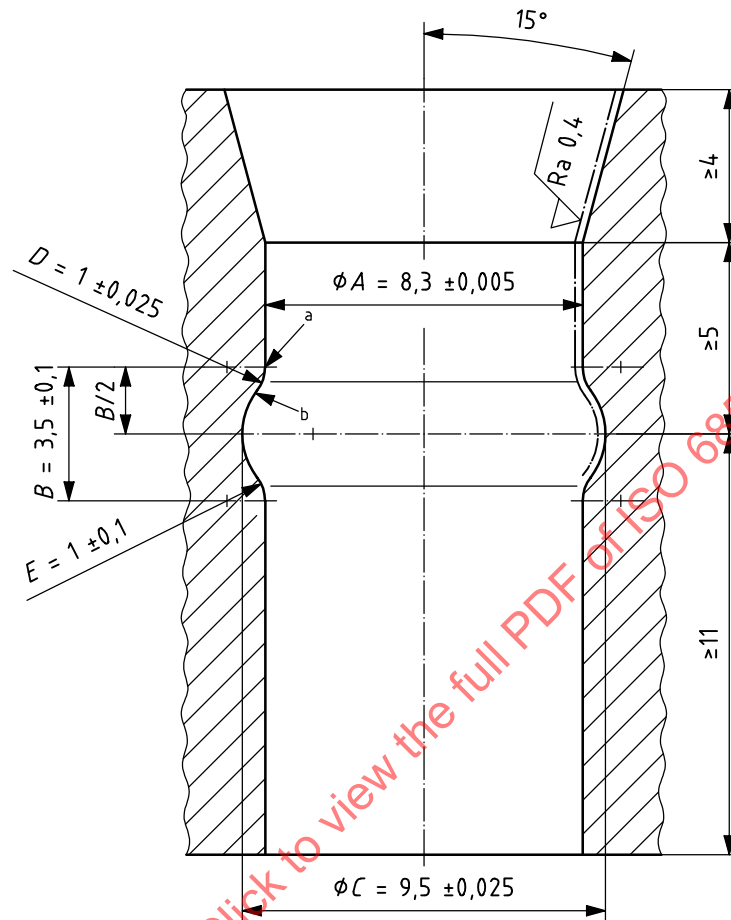


The gauge shall be of hardened steel.

NOTE The tolerances given for the gauge dimensions also include wear tolerances. Dimensions  $A$  and  $D$  are the most critical.

- a Tangential slope from diameter  $A$  to radius  $D$ .
- b Tangential slope from radius  $D$  to radius  $F$ . The value of  $F$  is implicitly determined by the values of dimensions  $A$ ,  $B$ ,  $C$ ,  $D$  and  $E$ .

**Figure 1 — Gauge for measurement of insertion and removal forces of high-voltage connectors — Socket type high-voltage connection for ignition coils and distributors**

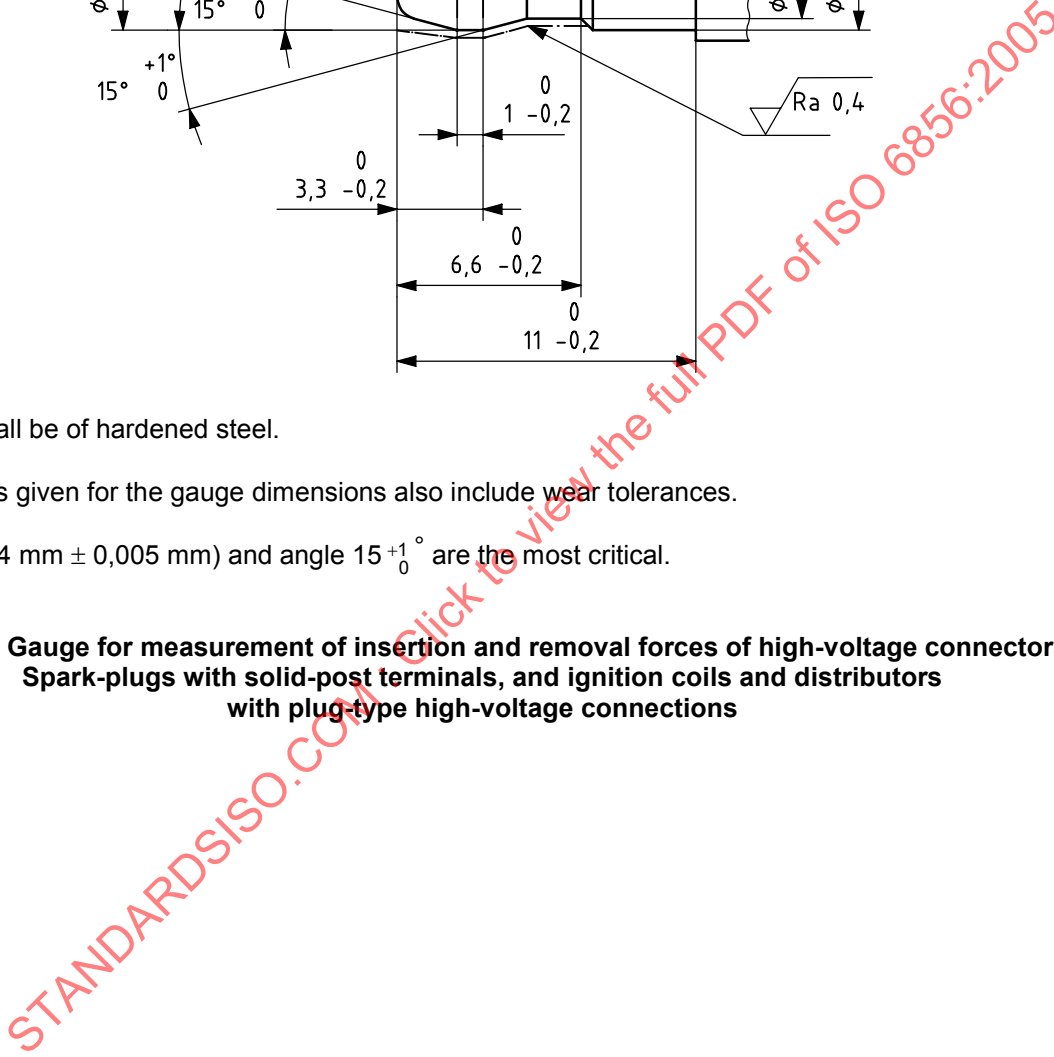


The tolerances given for the gauge dimensions also include wear tolerances.

Dimension (6,4 mm  $\pm$  0,005 mm) and angle 15<sup>+1</sup><sub>0</sub> ° are the most critical.

**Figure 2 — Gauge for measurement of insertion and removal forces of high-voltage connectors — Spark-plugs with solid-post terminals, and ignition coils and distributors with plug-type high-voltage connections**

Dimensions in millimetres

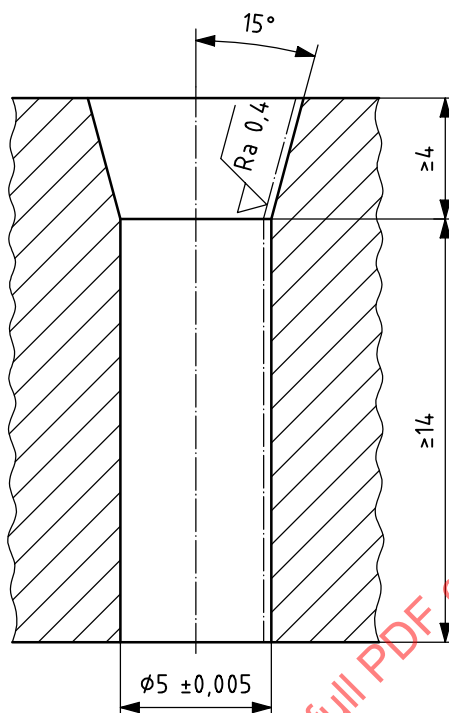


The gauge shall be of hardened steel.

The tolerances given for the gauge dimensions also include wear tolerances.

**Figure 3 — Gauge for measurement of insertion and removal forces of high-voltage connectors — Ignition coils and distributors (5 mm cable type)**

Dimensions in millimetres

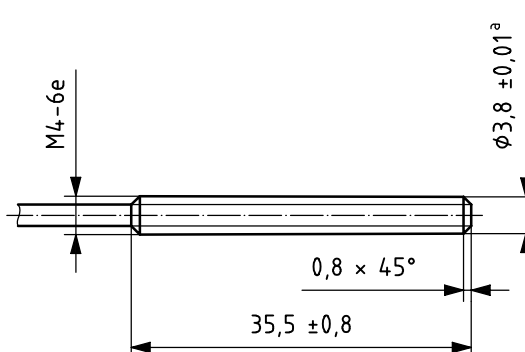

The gauge shall be of hardened steel.

The tolerance given for the outside diameter of the gauge threaded part also includes wear tolerance.

<sup>a</sup> Outside diameter.

**Figure 4 — Gauge for measurement of insertion and removal forces of high-voltage connectors — Spark-plugs with threaded terminals**

### 3.3 Separation forces of cables from connector

#### 3.3.1 Test

Place the cable assembly in a hot air oven with natural draught and expose it to the test temperature for 1 h in accordance with Table 1.

**Table 1 — Test temperatures for separation forces**

| Cable classes according to ISO 3808 | Test temperature |
|-------------------------------------|------------------|
|                                     | °C               |
| A, B                                | 70               |
| C, D, E, F                          | 90               |

As soon as possible (1 min max.) after removing the specimen from the oven, or in the oven itself if the apparatus permits, measure the separation force using a suitable test apparatus at a constant test speed of 100 mm/min, 200 mm/min or 500 mm/min. The exact speed used shall be agreed between customer and supplier and recorded in the test report.

#### 3.3.2 Requirements

There shall be neither mechanical separation nor electrical interruption between the cable and the connector until the force is at least 10 N above the first measured removal force.

Whether any change of ohmic resistance in the case of suppression cables may be permitted following the test is to be agreed between customer and supplier.

### 3.4 Electrical insulation tests

#### 3.4.1 General

The two following tests 3.4.2 and 3.4.3 are intended to be carried out alternatively. Either may be chosen according to the intention of the user; there is no need to perform both tests with one sample.

#### 3.4.2 Sealing test (in NaCl/water solution)

##### 3.4.2.1 Arrangement of samples

Fit the samples with test cable(s) and connect them to the corresponding part(s) in accordance with the application. Do not disconnect the connections at any time during the entire test.

##### 3.4.2.2 Preconditioning of the samples

Preconditioning causes any trapped air to escape, producing a tight seat between the connecting parts.

Expose the samples to 20 temperature shocks of  $(+ 90 \pm 2) ^\circ\text{C}$  to  $(- 20 \pm 2) ^\circ\text{C}$ . Then test the entire arrangement in accordance with Figure 5 in a 3 % NaCl/water solution. The ends of the sealing parts shall be a minimum of 2 mm below the surface of the liquid.

**3.4.2.3 High-voltage pulses**

Apply pulses in accordance with the following specifications.

Voltage rise time  $[(0,1 \text{ to } 0,9) U_{\text{sec}}]$ :  $(80 \pm 25) \mu\text{s}$  at 150 pF.

Pulse width  $(0,1 U_{\text{sec}})$ :  $(290 \pm 85) \mu\text{s}$  at 150 pF.

**3.4.2.4 Test conditions**

Pulse rate: 50 Hz or 60 Hz.

Test duration: 24 h.

Voltage: see Table 2.

Start of test: immediately after immersion of the sample in the liquid.

**Table 2 — Voltage classes and peak voltages**

| Voltage class                | a  | b  | c  | d  | e  | f  |
|------------------------------|----|----|----|----|----|----|
| Peak voltage kV $\pm 1,0$ kV | 13 | 16 | 19 | 22 | 26 | 31 |

**3.4.2.5 Requirement**

During the entire test no spark-over or breakdown is permitted.

**3.4.3 Breakdown test****3.4.3.1 Arrangement of the samples**

Fit the samples with test cable(s) and connect them to the corresponding part(s) in accordance with the application. Do not disconnect the connections at any time during the entire test.

**3.4.3.2 Preconditioning of samples**

Preconditioning causes any trapped air to escape, producing a tight seat between the connecting parts.

Expose the samples to 20 temperature shocks of  $(+ 90 \pm 2) ^\circ\text{C}$  to  $(- 20 \pm 2) ^\circ\text{C}$ . Then test the entire arrangement in steel balls in accordance with Figure 5.

**3.4.3.3 High-voltage pulses**

Apply pulses in accordance with the following specifications.

Voltage rise time  $[(0,1 \text{ to } 0,9) U_{\text{sec}}]$ :  $(80 \pm 25) \mu\text{s}$  at 150 pF.

Pulse width  $(0,1 U_{\text{sec}})$ :  $(290 \pm 85) \mu\text{s}$  at 150 pF.

**3.4.3.4 Test conditions**

Pulse rate: 50 Hz or 60 Hz.

Test duration: 1 h.


Voltage: see Table 3.

Table 3 — Voltage classes and peak voltages

| Voltage class               | a  | b  | c  | d  | e  | f  |
|-----------------------------|----|----|----|----|----|----|
| Peak voltage    kV ± 1,0 kV | 19 | 22 | 25 | 28 | 31 | 35 |

3.4.3.5 Requirement

During the entire test no spark-over or breakdown is permitted.

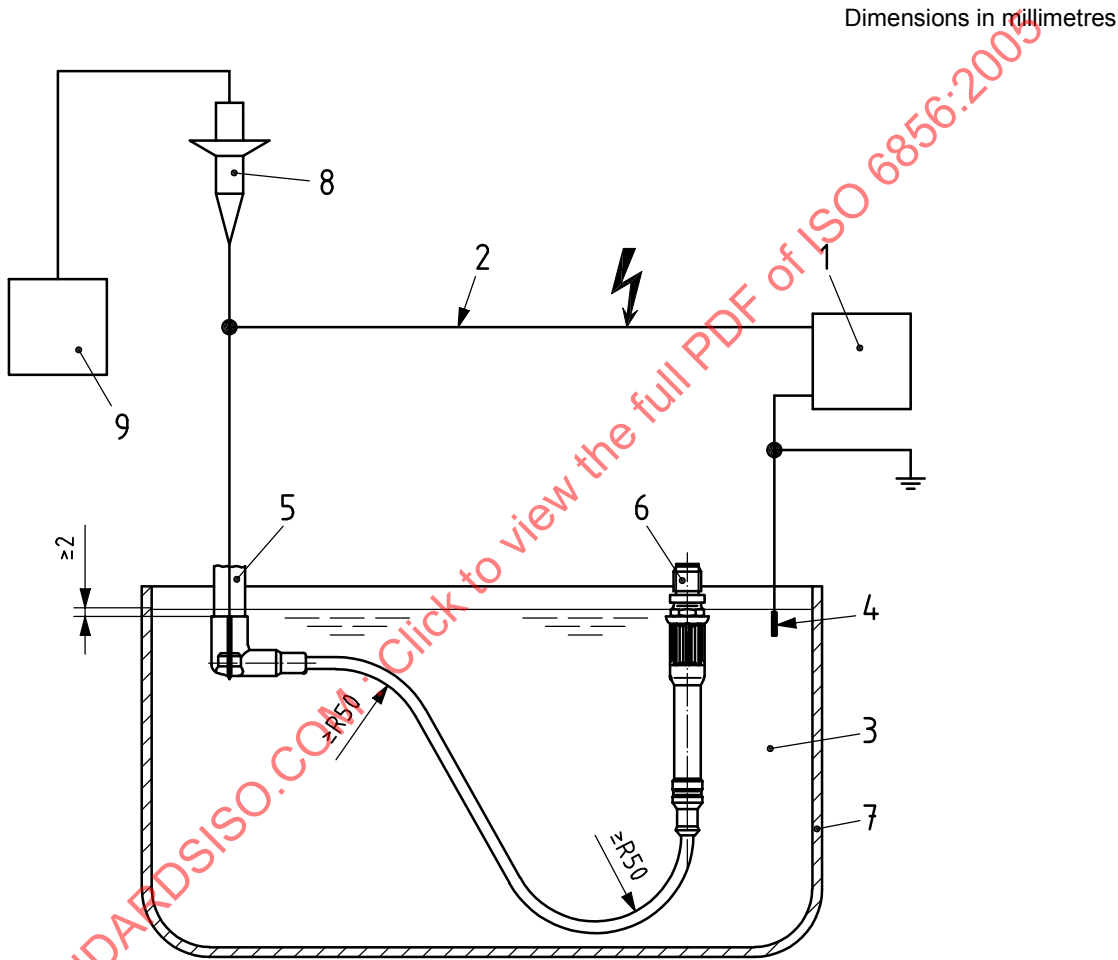

- Key**
- 1 high-voltage pulse generator
  - 2 high-voltage ignition cable
  - 3 NaCl/water solution according to 3.4.2 or steel balls  $\varnothing \approx 3$  mm according to 3.4.3
  - 4 electrode (grounded)
  - 5 high-voltage terminal (as agreed between vehicle and equipment manufacturers) (e.g. distributor, ignition coil)
  - 6 spark-plug insulator
  - 7 transparent container
  - 8 high-voltage probe 1:1 000
  - 9 oscilloscope

Figure 5 — Electrical insulation test set-up