
**Graphical symbols — Safety colours
and safety signs — Registered safety
signs**

*Symboles graphiques — Couleurs de sécurité et signaux de sécurité —
Signaux de sécurité enregistrés*

STANDARDSISO.COM : Click to view the full PDF of ISO 7010:2019



STANDARDSISO.COM : Click to view the full PDF of ISO 7010:2019



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Referents and categorization of safety signs	2
4.1 General.....	2
4.2 Referent (safety meaning).....	2
4.3 Categorization of safety signs.....	8
5 Registered safety signs	9
Bibliography	298

STANDARDSISO.COM : Click to view the full PDF of ISO 7010:2019

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 145, *Graphical symbols*, Subcommittee SC 2, *Safety identification, signs, shapes, symbols and colours*.

This third edition cancels and replaces the second edition (ISO 7010:2011), which has been technically revised. The main changes to the previous edition are as follows:

The safety signs from

- ISO 7010:2011/Amd 1:2012,
- ISO 7010:2011/Amd 2:2012,
- ISO 7010:2011/Amd 3:2012,
- ISO 7010:2011/Amd 4:2013,
- ISO 7010:2011/Amd 5:2014,
- ISO 7010:2011/Amd 6:2014,
- ISO 7010:2011/Amd 7:2016,
- ISO 7010:2011/Amd 8:2017,
- ISO 7010:2011/Amd 9:2018 and
- ISO 20712-1:2008

have been incorporated with a few minor text adjustments.

This edition also cancels and replaces ISO 20712-1:2008.

All safety signs are available on the ISO Online browsing platform at <https://www.iso.org/obp>.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

This corrected version of ISO 7010:2019 incorporates the following corrected safety signs:

- mandatory action signs: M053 and M054;
- prohibition signs: P048 to P052, P054, P055, P057 to P059, P061 to P066;
- warning signs: W043, W045 to W050, W052, W053, W057, W058, W060 to W063, W065, W066.

STANDARDSISO.COM : Click to view the full PDF of ISO 7010:2019

Introduction

There is a need to standardize a system of providing safety information that relies as little as possible on the use of words to achieve understanding.

Continued growth in international trade, travel and mobility of labour requires a common method of communicating safety information.

Lack of standardization may lead to confusion and the risk of accidents.

The use of standardized safety signs does not replace proper work methods, instructions and accident prevention training or measures. Education is an essential part of any system that provides safety information.

The safety signs are intended for use only where there is a risk to people. They may appear in safety signage in workplaces and public areas, safety manuals and notices, product labelling and escape and evacuation plans, as appropriate.

This document is intended to be used by all Technical Committees within ISO charged with developing specific safety signing for their industry, to ensure that there is only one safety sign for each safety meaning. It is also intended that this document be revised regularly to include safety signs as they are standardized by ISO, and which conform to the design principles given in the ISO 3864 series.

The safety signs in this document have been validated by ISO/TC 145/SC 2 according to procedures of standardization current at the time of publication.

NOTE 1 Some countries' statutory regulations might differ in some respects from those given in this document.

NOTE 2 Information on procedures, criteria of acceptability, safety sign templates and application of safety signs, as well as translations of the referents, can be found at <http://www.iso.org/tc145/sc2>.

Graphical symbols — Safety colours and safety signs — Registered safety signs

IMPORTANT — The colours represented in the electronic file of this document can be neither viewed on screen nor printed as true representations. For the purposes of colour matching, see ISO 3864-4 which provides colorimetric and photometric properties together with, as a guideline, references from colour order systems.

1 Scope

This document prescribes safety signs for the purposes of accident prevention, fire protection, health hazard information and emergency evacuation.

The shape and colour of each safety sign are according to ISO 3864-1 and the design of the graphical symbols is according to ISO 3864-3.

This document is applicable to all locations where safety issues related to people need to be addressed. However, it is not applicable to the signalling used for guiding rail, road, river, maritime and air traffic and, in general, to those sectors subject to a regulation which may differ with regard to certain points of this document and of the ISO 3864 series.

This document specifies the safety sign originals that can be scaled for reproduction and application purposes.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3864-1, *Graphical symbols — Safety colours and safety signs — Part 1: Design principles for safety signs and safety markings*

ISO 3864-3, *Graphical symbols — Safety colours and safety signs — Part 3: Design principles for graphical symbols for use in safety signs*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

image content

written description of the elements of a graphical symbol or safety sign and their relative disposition

3.2

referent

idea or object that a graphical symbol is intended to represent

3.3

safety sign

sign giving a general safety message, obtained by a combination of a colour and geometric shape and which, by the addition of a graphical symbol, gives a particular safety message

3.4

safety sign original

safety sign with which a referent, a graphical representation and a description of the application are associated

3.5

supplementary sign

sign that is supportive of another sign and the main purpose of which is to provide additional clarification

4 Referents and categorization of safety signs

4.1 General

The summaries in 4.2 and 4.3 are provided to facilitate the search for registered safety signs.

This document will be maintained electronically through the use of a database. The indexes of this database will be used in these summaries as search engines with each registered safety sign having a unique reference number.

4.2 Referent (safety meaning)

Table 1 gives the list of referents in alphabetical order and provides the safety sign functional reference number.

Table 1 — Summary of referents in alphabetical order

Referent (safety meaning)	Functional reference number
Alighting from toboggan to the left	M050
Alighting from toboggan to the right	M051
Arc flash; warning	W042
Asphyxiating atmosphere; warning	W041
Automated external heart defibrillator	E010
Automatic start-up; warning	W018
Barbed wire; warning	W033
Battery charging; warning	W026
Biological hazard; warning	W009
Boating area; warning	W058
Break to obtain access	E008
Bull; warning	W034
Check guard	M027
Child seat presence and orientation detection system (CPOD)	E014
Child's lifejacket	E045
Close and secure hatches in launch sequence	M037
Close safety bar of chairlift	M033
Connect an earth terminal to the ground	M005
Corrosive substance; warning	W023

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Counterrotating rollers; warning	W025
Crocodiles, alligators or caymans; warning	W067
Crushing; warning	W019
Crushing of hands; warning	W024
Davit-launched liferaft	E039
Deep shelving beach; warning	W066
Deep water; warning	W047
Disconnect before carrying out maintenance or repair	M021
Disconnect mains plug from electrical outlet	M006
Doctor	E009
Do not alter the state of the switch	P031
Do not expose to direct sunlight or hot surface	P068
Do not extinguish with water	P011
Do not leave the tow-track	P037
Do not obstruct	P023
Do not put finger into the nozzle of a hydromassage	P070
Do not ram into toboggans	P047
Do not set off fireworks	P040
Do not spray with water	P016
Do not stretch out of toboggan	P046
Do not swing the chair	P038
Do not tie knots in rope	P030
Do not touch	P010
Do not use for face grinding	P032
Do not use for wet grinding	P033
Do not use lift in the event of fire	P020
Do not use this device in a bathtub, shower or water-filled reservoir	P026
Do not use this incomplete scaffold	P025
Do not use this lift for people	P027
Do not use with hand-held grinding machine	P034
Do not walk or stand here	P024
Do not wear gloves	P028
Do not wear metal-studded footwear	P035
Door opens by pulling on the left-hand side	E057
Door opens by pulling on the right-hand side	E058
Door opens by pushing on the left-hand side	E022
Door opens by pushing on the right-hand side	E023
Door slides left to open	E034
Door slides right to open	E033
Drinking water	E015
Drop (fall); warning	W008
Electricity; warning	W012
Embarkation ladder	E053
Emergency escape breathing device	E029

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Emergency exit (left hand)	E001
Emergency exit (right hand)	E002
Emergency exit for people unable to walk or with walking impairment (left)	E026
Emergency exit for people unable to walk or with walking impairment (right)	E030
Emergency hammer	E025
Emergency position indicating radio beacon	E052
Emergency stop button	E020
Emergency telephone	E004
Emergency window with escape ladder	E016
Escape ladder	E059
Evacuation assembly point	E007
Evacuation chair	E060
Evacuation temporary refuge	E024
Explosive material; warning	W002
Eyewash station	E011
Falling ice; warning	W039
Falling objects; warning	W035
Fire alarm call point	F005
Fire blanket	F016
Fire emergency telephone	F006
Fire extinguisher	F001
Firefighting equipment, collection of	F004
Fire hose reel	F002
Fire monitor	F015
Fire ladder	F003
Fire protection door	F007
First aid	E003
Fixed fire extinguishing battery	F008
Fixed fire extinguishing bottle	F013
Fixed fire extinguishing installation	F012
Flammable material; warning	W021
Floor-level obstacle; warning	W007
Forklift trucks and other industrial vehicles; warning	W014
Fragile roof; warning	W036
General mandatory action sign	M001
General prohibition sign	P001
General warning sign	W001
Guard dog; warning	W013
Hand crushing between press brake and material; warning	W031
Hand crushing between press brake tool; warning	W030
High surf or large breaking waves; warning	W065
Hot surface; warning	W017

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Hot works prohibited	P039
Immediately leave the tow-track in the event of falling	M035
Incoming tides; warning	W060
Infant's lifejacket	E046
Keep children under supervision in the aquatic environment	M054
Keep distance between toboggans	M052
Keep locked	M028
Kite surfing; warning	W062
Laser beam; warning	W004
Lifeboat	E036
Lifebuoy	E040
Lifebuoy with light	E042
Lifebuoy with line	E041
Lifebuoy with line and light	E043
Lifejacket	E044
Liferaft	E038
Liferaft knife	E035
Lift ski tips	M036
Line-throwing appliance	E050
Low temperature/freezing conditions; warning	W010
Lower lifeboat to the water in launch sequence	M039
Lower liferaft to the water in launch sequence	M040
Lower rescue boat to the water in launch sequence	M041
Magnetic field; warning	W006
Marine evacuation chute	E055
Marine evacuation slide	E054
Medical grab bag	E027
No access for forklift trucks and other industrial vehicles	P006
No access for people with active implanted cardiac devices	P007
No access for people with metallic implants	P014
No activated mobile phones	P013
No body boarding	P063
No children allowed	P036
No climbing	P009
No diving	P052
No dogs	P021
No eating or drinking	P022
No heavy load	P012
No jumping into water	P061
No kite surfing	P065
No leaning against	P041
No manually powered craft	P055
No mechanically powered craft	P056
No metallic articles or watches	P008

Table 1 (continued)

Referent (safety meaning)	Functional reference number
No open flame; Fire, open ignition source and smoking prohibited	P003
No outdoor footwear	P060
No parasailing	P066
No personal water craft	P057
No photography	P029
No pushing	P017
No pushing into water	P062
No reaching in	P015
No running	P048
No sailing	P053
No sand yachting	P067
No sitting	P018
No smoking	P002
No snorkelling	P050
No stepping on surface	P019
No sub-aqua diving	P051
No surf craft	P059
No surfing between the red-and-yellow flags	P064
No swimming	P049
No thoroughfare	P004
No towed water activity	P058
No windsurfing	P054
Non-ionizing radiation; warning	W005
Not drinking water	P005
Not for people in the state of intoxication	P043
Not for pregnant women	P042
Not to be serviced by users	P069
Opaque eye protection must be worn	M007
Open safety bar of chairlift	M034
Optical radiation; warning	W027
Overhead load; warning	W015
Overhead obstacle; warning	W020
Oxidizing substance; warning	W028
Oxygen resuscitator	E028
Parasailing; warning	W063
Portable foam applicator unit	F010
Pressurized cylinder; warning	W029
Protect infant's eyes with opaque eye protection	M025
Protection shelter	E021
Quicksand or mud/deep mud or silt; warning	W061
Radioactive material or ionizing radiation; warning	W003
Rapid movement of workpiece in press brake; warning	W032
Refer to instruction manual/booklet	M002
Remote release station	F014

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Release falls in launch sequence	M042
Release lifeboat grips in launch sequence	M045
Rescue boat	E037
Rescue window	E017
Rocket parachute flare	E049
Roof avalanche; warning	W040
Run over by remote operator-controlled machine; warning	W037
Safety shower	E012
Sand yachting; warning	W059
Search and rescue transponder	E047
Secure gas cylinders	M046
Sewage effluent outfall; warning	W055
Shallow water (diving); warning	W048
Sharks; warning	W054
Sharp element; warning	W022
Shipboard assembly station	E032
Shipboard general alarm	E031
Slippery surface; warning	W011
Slipway; warning	W044
Sound horn	M029
Start air supply in launch sequence	M044
Start engine in launch sequence	M038
Start water spray in launch sequence	M043
Stretcher	E013
Strong currents; warning	W057
Strong winds; warning	W064
Submerged objects; warning	W049
Sudden drop in swimming or leisure pools; warning	W050
Sudden loud noise; warning	W038
Surf craft area; warning	W046
Survival clothing	E056
Survival craft distress signals	E048
Thin ice; warning	W043
Towed water activity area; warning	W045
Toxic material; warning	W016
Tsunami evacuation area	E062
Tsunami evacuation building	E063
Tsunami hazard zone; warning	W056
Turn anticlockwise to open	E018
Turn clockwise to open	E019
Two-way VHF radiotelephone apparatus	E051
Unprotected edges; warning	W051
Unstable cliff; warning	W053
Unstable cliff edge; warning	W052

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Use barrier cream	M022
Use footbridge	M023
Use gas detector	M048
Use handrail	M012
Use litter bin	M030
Use of smart glasses prohibited	P044
Use protective apron	M026
Use self-contained breathing appliance	M047
Use table saw adjustable guard	M031
Use this walkway	M024
Wash your hands	M011
Water fog applicator	F011
Water life-saving equipment	E061
Wear anti-static footwear	M032
Wear ear protection	M003
Wear eye protection	M004
Wear a face shield	M013
Wear head protection	M014
Wear high-visibility clothing	M015
Wear a mask	M016
Wear personal flotation devices	M053
Wear protective clothing	M010
Wear protective gloves	M009
Wear protective roller sport equipment	M049
Wear respiratory protection	M017
Wear safety belts	M020
Wear safety footwear	M008
Wear a safety harness	M018
Wear a welding mask	M019
Wheeled fire extinguisher	F009

4.3 Categorization of safety signs

Safety signs are categorized according to their function as follows:

- E is the category for signs indicating an evacuation route, the location of safety equipment or a safety facility, or a safety action (safe condition signs);
- F is the category for fire equipment signs;
- M is the category for mandatory action signs;
- P is the category for prohibition signs;
- W is the category for warning signs.

[Table 2](#) summarizes the registered safety signs in terms of safety sign category in accordance with ISO 3864-1.

5 Registered safety signs

[Tables 3](#) to [7](#) give safety sign originals in a uniform 70 mm size with corner marks to enable accurate enlargement and reduction scaling. The sign illustrations are shown without borders in order to allow for consistent reproduction scaling, though a border can be useful to achieve a luminance contrast between the safety sign and its background when mounted or displayed. The safety signs should be reproduced exactly as shown in [Tables 3](#) to [7](#). However, some degree of graphical modification is permitted when cultural differences or special application formats need to be considered, provided the original meaning is retained and comprehension of the safety sign is maintained. Consistent reproduction and use of these safety signs will lead to a progressively improved degree of comprehension at the international level.

In cases where the orientation of the graphical symbol is not essential to the meaning of the safety sign, the graphical symbol may be reproduced in a mirrored form. For prohibition signs, it is essential that the prohibition bar does not obscure significant details of the graphical symbol.

NOTE The graphical symbol is the complete image containing all the graphical symbol elements as shown in the registered safety sign.

Where a registered safety sign is not available to indicate a particular desired meaning, the meaning shall be obtained either by developing a new safety sign following the design principles of ISO 3864-1 and ISO 3864-3 or by using the appropriate general sign (ISO 7010-M001, ISO 7010-P001, ISO 7010-W001), together with supplementary safety information.

[Tables 3](#) to [7](#) give a description of the application of each safety sign and present the safety sign originals according to their category as follows:

- E: signs indicating an evacuation route, the location of safety equipment or a safety facility, or a safety action (safe condition signs) see [Table 3](#);
- F: fire equipment signs see [Table 4](#);
- M: mandatory action signs see [Table 5](#);
- P: prohibition signs see [Table 6](#);
- W: warning signs see [Table 7](#).

Table 2 — Summary of all safety signs

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E001	F001	M001	P001	W001
Referent	Emergency exit (left hand)	Fire extinguisher	General mandatory action sign	General prohibition sign	General warning sign
Safety sign					
Reference number	E002	F002	M002	P002	W002
Referent	Emergency exit (right hand)	Fire hose reel	Refer to instruction manual/booklet	No smoking	Warning; Explosive material
Safety sign					
Reference number	E003	F003	M003	P003	W003
Referent	First aid	Fire ladder	Wear ear protection	No open flame; Fire, open ignition source and smoking prohibited	Warning; Radioactive material or ionizing radiation

Table 2 (continued)


	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E004	F004	M004	P004	W004
Referent	Emergency telephone	Collection of firefighting equipment	Wear eye protection	No thoroughfare	Warning; Laser beam
Safety sign	withdrawn				
Reference number	E005	F005	M005	P005	W005
Referent	Direction, arrow (90° increments), safe condition	Fire alarm call point	Connect an earth terminal to the ground	Not drinking water	Warning; Non-ionizing radiation
Safety sign	withdrawn				
Reference number	E006	F006	M006	P006	W006
Referent	Direction, 45° arrow (90° increments), safe condition	Fire emergency telephone	Disconnect mains plug from electrical outlet	No access for forklift trucks and other industrial vehicles	Warning; Magnetic field

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E007	F007	M007	P007	W007
Referent	Evacuation assembly point	Fire protection door	Opaque eye protection must be worn	No access for people with active implanted cardiac devices	Warning; Floor-level obstacle
Safety sign					
Reference number	E008	F008	M008	P008	W008
Referent	Break to obtain access	Fixed fire extinguishing battery	Wear safety footwear	No metallic articles or watches	Warning; Drop (fall)
Safety sign					
Reference number	E009	F009	M009	P009	W009
Referent	Doctor	Wheeled fire extinguisher	Wear protective gloves	No climbing	Warning; Biological hazard
Safety sign					
Reference number	E010	F010	M010	P010	W010
Referent	Automated external heart defibrillator	Portable foam applicator unit	Wear protective clothing	Do not touch	Warning; Low temperature/freezing conditions

Table 2 (continued)




	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E011	F011	M011	P011	W011
Referent	Eyewash station	Water fog applicator	Wash your hands	Do not extinguish with water	Warning; Slippery surface
Safety sign					
Reference number	E012	F012	M012	P012	W012
Referent	Safety shower	Fixed fire extinguishing installation	Use handrail	No heavy load	Warning; Electricity
Safety sign					
Reference number	E013	F013	M013	P013	W013
Referent	Stretcher	Fixed fire extinguishing bottle	Wear a face shield	No activated mobile phones	Warning; Guard dog
Safety sign					
Reference number	E014	F014	M014	P014	W014
Referent	Child seat presence and orientation detection system (CPOD)	Remote release station	Wear head protection	No access for people with metallic implants	Warning; Forklift trucks and other industrial vehicles

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E015	F015	M015	P015	W015
Referent	Drinking water	Fire monitor	Wear high-visibility clothing	No reaching in	Warning; Overhead load
Safety sign					
Reference number	E016	F016	M016	P016	W016
Referent	Emergency window with escape ladder	Fire blanket	Wear a mask	Do not spray with water	Warning; Toxic material
Safety sign		—			
Reference number	E017	—	M017	P017	W017
Referent	Rescue window	—	Wear respiratory protection	No pushing	Warning; Hot surface
Safety sign		—			
Reference number	E018	—	M018	P018	W018
Referent	Turn anticlockwise to open	—	Wear a safety harness	No sitting	Warning; Automatic start-up

Table 2 (continued)


	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E019	—	M019	P019	W019
Referent	Turn clockwise to open	—	Wear a welding mask	No stepping on surface	Warning; Crushing
Safety sign		—			
Reference number	E020	—	M020	P020	W020
Referent	Emergency stop button	—	Wear safety belts	Do not use lift in the event of fire	Warning; Overhead obstacle
Safety sign		—			
Reference number	E021	—	M021	P021	W021
Referent	Protection shelter	—	Disconnect before carrying out maintenance or repair	No dogs	Warning; Flammable material
Safety sign		—			
Reference number	E022	—	M022	P022	W022
Referent	Door opens by pushing on the left-hand side	—	Use barrier cream	No eating or drinking	Warning; Sharp element

Table 2 (continued)




	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E023	—	M023	P023	W023
Referent	Door opens by pushing on the right-hand side	—	Use footbridge	Do not obstruct	Warning; Corrosive substance
Safety sign		—			
Reference number	E024	—	M024	P024	W024
Referent	Evacuation temporary refuge	—	Use this walkway	Do not walk or stand here	Warning; Crushing of hands
Safety sign		—			
Reference number	E025	—	M025	P025	W025
Referent	Emergency hammer	—	Protect infant's eyes with opaque eye protection	Do not use this incomplete scaffold	Warning; Counterrotating rollers
Safety sign		—			
Reference number	E026	—	M026	P026	W026
Referent	Emergency exit for people unable to walk or with walking impairment (left)	—	Use protective apron	Do not use this device in a bathtub, shower, or water-filled reservoir	Warning; Battery charging

Table 2 (continued)



	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E027	—	M027	P027	W027
Referent	Medical grab bag	—	Check guard	Do not use this lift for people	Warning; Optical radiation
Safety sign		—			
Reference number	E028	—	M028	P028	W028
Referent	Oxygen resuscitator	—	Keep locked	Do not wear gloves	Warning; Oxidizing substance
Safety sign		—			
Reference number	E029	—	M029	P029	W029
Referent	Emergency escape breathing device	—	Sound horn	No photography	Warning; Pressurized cylinder

Table 2 (continued)



	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E030	—	M030	P030	W030
Referent	Emergency exit for people unable to walk or with walking impairment (right)	—	Use litter bin	Do not tie knots in rope	Warning; Hand crushing between press brake tool
Safety sign		—			
Reference number	E031	—	M031	P031	W031
Referent	Shipboard general alarm	—	Use table saw adjustable guard	Do not alter the state of the switch	Warning; Hand crushing between press brake and material
Safety sign		—			
Reference number	E032	—	M032	P032	W032
Referent	Shipboard assembly station	—	Wear anti-static footwear	Do not use for face grinding	Warning; Rapid movement of workpiece in press brake

Table 2 (continued)



	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E033	—	M033	P033	W033
Referent	Door slides right to open	—	Close safety bar of chairlift	Do not use for wet grinding	Warning; Barbed wire
Safety sign		—			
Reference number	E034	—	M034	P034	W034
Referent	Door slides left to open	—	Open safety bar of chairlift	Do not use with hand-held grinding machine	Warning; Bull
Safety sign		—			
Reference number	E035	—	M035	P035	W035
Referent	Liferaft knife	—	Immediately leave the tow-track in the event of falling	Do not wear metal-studded footwear	Warning; Falling objects
Safety sign		—			
Reference number	E036	—	M036	P036	W036
Referent	Lifeboat	—	Lift ski tips	No children allowed	Warning; Fragile roof

Table 2 (continued)



	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E037	—	M037	P037	W037
Referent	Rescue boat	—	Close and secure hatches in launch sequence	Do not leave the tow-track	Warning; Run over by remote operator-controlled machine
Safety sign		—			
Reference number	E038	—	M038	P038	W038
Referent	Liferaft	—	Start engine in launch sequence	Do not swing the chair	Warning; Sudden loud noise
Safety sign		—			
Reference number	E039	—	M039	P039	W039
Referent	Davit-launched liferaft	—	Lower lifeboat to the water in launch sequence	Hot works prohibited	Warning; Falling ice
Safety sign		—			
Reference number	E040	—	M040	P040	W040
Referent	Lifebuoy	—	Lower liferaft to the water in launch sequence	Do not set off fireworks	Warning; Roof avalanche

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E041	—	M041	P041	W041
Referent	Lifebuoy with line	—	Lower rescue boat to the water in launch sequence	No leaning against	Warning; Asphyxiating atmosphere
Safety sign		—			
Reference number	E042	—	M042	P042	W042
Referent	Lifebuoy with light	—	Release falls in launch sequence	Not for pregnant women	Warning; Arc flash
Safety sign		—			
Reference number	E043	—	M043	P043	W043
Referent	Lifebuoy with line and light	—	Start water spray in launch sequence	Not for people in the state of intoxication	Warning; Thin ice
Safety sign		—			
Reference number	E044	—	M044	P044	W044
Referent	Lifejacket	—	Start air supply in launch sequence	Use of smart glasses prohibited	Warning; Slipway

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—		—	
Reference number	E045	—	M045	—	W045
Referent	Child's lifejacket	—	Release lifeboat grips in launch sequence	—	Warning; Towed water activity area
Safety sign		—			
Reference number	E046	—	M046	P046	W046
Referent	Infant's lifejacket	—	Secure gas cylinders	Do not stretch out of toboggan	Warning; Surf craft area
Safety sign		—			
Reference number	E047	—	M047	P047	W047
Referent	Search and rescue transponder	—	Use self-contained breathing appliance	Do not ram into toboggan	Warning; Deep water
Safety sign		—			
Reference number	E048	—	M048	P048	W048
Referent	Survival craft distress signals	—	Use gas detector	No running	Warning; Shallow water (diving)

Table 2 (continued)


	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E049	—	M049	P049	W049
Referent	Rocket parachute flare	—	Wear protective roller sport equipment	No swimming	Warning; Submerged objects
Safety sign		—			
Reference number	E050	—	M050	P050	W050
Referent	Line-throwing appliance	—	Alighting from toboggan to the left	No snorkelling	Warning; Sudden drop in swimming or leisure pools
Safety sign		—			
Reference number	E051	—	M051	P051	W051
Referent	Two-way VHF radiotelephone apparatus	—	Alighting from toboggan to the right	No sub-aqua diving	Warning; Unprotected edges
Safety sign		—			
Reference number	E052	—	M052	P052	W052
Referent	Emergency position indicating radio beacon	—	Keep distance between toboggans	No diving	Warning; Unstable cliff edge

Table 2 (continued)


	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E053	—	M053	P053	W053
Referent	Embarkation ladder	—	Wear personal flotation devices	No sailing	Warning; Unstable cliff
Safety sign		—			
Reference number	E054	—	M054	P054	W054
Referent	Marine evacuation slide	—	Keep children under supervision in the aquatic environment	No windsurfing	Warning; Sharks
Safety sign		—	—		
Reference number	E055	—	—	P055	W055
Referent	Marine evacuation chute	—	—	No manually powered craft	Warning; Sewage effluent outfall
Safety sign		—	—		
Reference number	E056	—	—	P056	W056
Referent	Survival clothing	—	—	No mechanically powered craft	Warning; Tsunami hazard zone

Table 2 (continued)



	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—	—		
Reference number	E057	—	—	P057	W057
Referent	Door opens by pulling on the left-hand side	—	—	No personal water craft	Warning; Strong currents
Safety sign		—	—		
Reference number	E058	—	—	P058	W058
Referent	Door opens by pulling on the right-hand side	—	—	No towed water activity	Warning; Boating area
Safety sign		—	—		
Reference number	E059	—	—	P059	W059
Referent	Escape ladder	—	—	No surf craft	Warning; Sand yachting
Safety sign		—	—		
Reference number	E060	—	—	P060	W060
Referent	Evacuation chair	—	—	No outdoor footwear	Warning; Incoming tides

Table 2 (continued)


	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—	—		
Reference number	E061	—	—	P061	W061
Referent	Water life-saving equipment	—	—	No jumping into water	Warning; Quicksand or mud/deep mud or silt
Safety sign		—	—		
Reference number	E062	—	—	P062	W062
Referent	Tsunami evacuation area	—	—	No pushing into water	Warning; Kite surfing
Safety sign		—	—		
Reference number	E063	—	—	P063	W063
Referent	Tsunami evacuation building	—	—	No body boarding	Warning; Parasailing
Safety sign	—	—	—		
Reference number	—	—	—	P064	W064
Referent	—	—	—	No surfing between the red-and-yellow flags	Warning; Strong winds

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign	—	—	—		
Reference number	—	—	—	P065	W065
Referent	—	—	—	No kite surfing	Warning; High surf or large breaking waves
Safety sign	—	—	—		
Reference number	—	—	—	P066	W066
Referent	—	—	—	No parasailing	Warning; Deep shelving beach
Safety sign	—	—	—		
Reference number	—	—	—	P067	W067
Referent	—	—	—	No sand yachting	Warning; Crocodiles, alligators or caymans
Safety sign	—	—	—		—
Reference number	—	—	—	P068	—
Referent	—	—	—	Do not expose to direct sunlight or hot surface	—

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign	—	—	—		—
Reference number	—	—	—	P069	—
Referent	—	—	—	Not to be serviced by users	—
Safety sign	—	—	—		—
Reference number	—	—	—	P070	—
Referent	—	—	—	Do not put finger into the nozzle of a hydromassage	—

Table 3 — Description and application of referent for signs indicating an evacuation route, the location of safety equipment or a safety facility, or a safety action (safe condition signs) (category E)

	Reference No. ISO 7010-E001
	Referent Emergency exit (left hand)
	Function To indicate an escape route to a place of safety
	Image content Human figure moving (to the left) through doorway
Hazard Not being able to locate an escape route to a place of safety which is provided for evacuation	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an escape route to a place of safety	
Additional information Test data obtained according to ISO 9186-1 are not available. However, this safety sign has been the subject of extensive research in Japan and the design selected has received the best comprehension results. A supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information (direction examples, the arrows may be rotated in increments of 45°):	
	
See ISO 16069:2017, Figure 1 for examples and meanings of combinations of the exit sign with the supplementary arrow sign.	

Table 3 (continued)

	Reference No. ISO 7010-E002
	Referent Emergency exit (right hand)
	Function To indicate an escape route to a place of safety
	Image content Human figure moving (to the right) through doorway
Hazard Not being able to locate an escape route to a place of safety which is provided for evacuation	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an escape route to a place of safety	
Additional information Test data obtained according to ISO 9186-1 are not available. However, this safety sign has been the subject of extensive research in Japan and the design selected has received the best comprehension results. A supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information (direction examples, the arrows may be rotated in increments of 45°):	
	
See ISO 16069:2017, Figure 1 for examples and meanings of combinations of the exit sign with the supplementary arrow sign.	

Table 3 (continued)

	Reference No. ISO 7010-E003
	Referent First aid
	Function To indicate the location of first aid equipment or facilities or staff
	Image content First aid cross
Hazard Not being able to locate first aid equipment or facilities or staff	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of first aid equipment or facilities or staff	
Additional information This safety sign should be used for first aid equipment or facilities or staff for which/whom there is no registered safety sign. The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E004
	Referent
	Emergency telephone
	Function
	To indicate the location of an emergency telephone
	Image content
	Telephone receiver (profile), first aid cross
Hazard Not being able to locate an emergency telephone	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an emergency telephone	
Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

withdrawn	Reference No. ISO 7010-E005
	Referent Direction, arrow (90° increments), safe condition
	Function
	Image content
Hazard Human behaviour that is intended to be caused after understanding the safety sign's meaning Additional information This sign has been withdrawn as a registered safety sign, since it is to be used as a supplementary sign only.	

Table 3 (continued)

withdrawn	Reference No. ISO 7010-E006
	Referent Direction, 45° arrow (90° increments), safe condition
	Function
	Image content
Hazard Human behaviour that is intended to be caused after understanding the safety sign's meaning Additional information This sign has been withdrawn as a registered safety sign, since it is to be used as a supplementary sign only.	

Table 3 (continued)

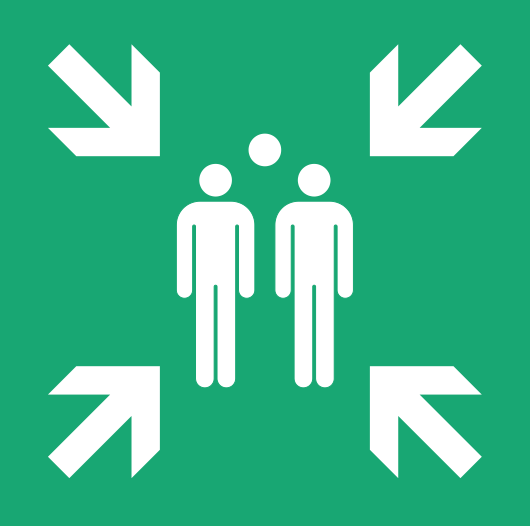
	Reference No. ISO 7010-E007
	Referent Evacuation assembly point
	Function To indicate the location of a safe assembly point following evacuation
	Image content Two human figures and a head of a third figure in a group, four arrows coming from the corners pointing to them
Hazard Not being able to locate a safe assembly point following evacuation	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the evacuation assembly point which is provided to enable people to be accounted for following the evacuation of a building or premises	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E008
	Referent Break to obtain access
	Function To indicate a cover which requires breaking to obtain access to an emergency exit device
	Image content Human fist and lower arm (outlined) holding a bar, uneven star shape
Hazard Not being able to open an emergency exit device	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Breaking the cover to gain access to the device that operates an emergency exit	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E009
	Referent
	Doctor
	Function
	To indicate the location of a doctor for emergencies
	Image content
	Upper human figure with stethoscope, first aid cross
Hazard Not being able to locate an emergency doctor Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an emergency doctor Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

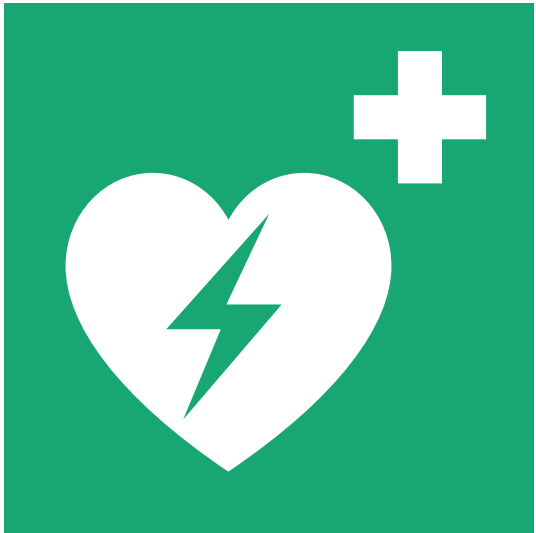
	Reference No.
	ISO 7010-E010
	Referent
	Automated external heart defibrillator
	Function
	To indicate the location of an automated external heart defibrillator
	Image content
	Heart with lightning bolt in the middle, first aid cross
Hazard Not being able to locate an automated external heart defibrillator	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an automated external heart defibrillator	
Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E011
	Referent
	Eyewash station
	Function
	To indicate the location of an eyewash station
	Image content
	Eye above running water coming out of a shower head, first aid cross
Hazard Not being able to locate an eyewash station	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an eyewash station	
Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

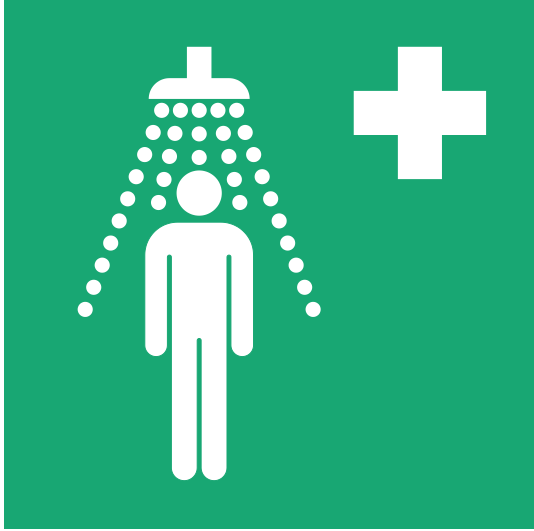
	Reference No.
	ISO 7010-E012
	Referent
	Safety shower
	Function
	To indicate the location of a safety shower
	Image content
	Human figure under running water coming out of a shower head, first aid cross
Hazard Not being able to locate a safety shower Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a safety shower Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

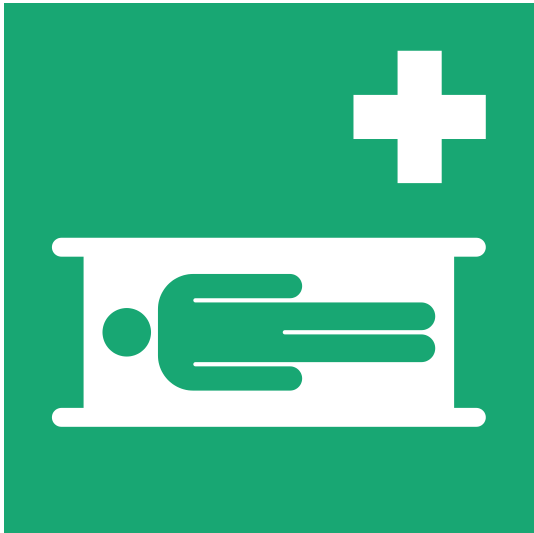
	Reference No.
	ISO 7010-E013
	Referent
	Stretcher
	Function
	To indicate the location of a stretcher
	Image content
	Human figure on a stretcher, first aid cross
Hazard Not being able to locate a stretcher Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a stretcher Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E014
	Referent Child seat presence and orientation detection system (CPOD)
	Function To indicate that a CPOD-equipped child seat can safely be used on a CPOD-equipped passenger seat protected by a frontal airbag
	Image content Vehicle passenger seat, child in rear-facing child seat, dot, three curved lines of increasing size radiating from the dot, filled semi-circle
Hazard Without a CPOD system, a fully powered vehicle airbag can injure a child in a child seat when the airbag is deployed	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Installing a CPOD-equipped child seat on a passenger seat protected by a frontal airbag in a vehicle that recognizes the CPOD child seat	
Additional information This safety sign will be used along with a supplementary sign as part of a label for CPOD-equipped child seats or for vehicles equipped with the CPOD sensing system. These two signs are part of ISO/TS 22239-3. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E015
	Referent
	Drinking water
	Function
	To indicate the location of drinking water
	Image content
	Tap above glass, two wavy lines
Hazard Not being able to locate drinking water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a water supply that is suitable for drinking	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E016
	Referent Emergency window with escape ladder
	Function To indicate the location of an emergency window for escape with a permanently fixed escape ladder
	Image content Human figure, window and a ladder on the left
Hazard Not being able to locate an emergency window for escape	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an emergency window	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E017
	Referent Rescue window
	Function To indicate the location of a rescue window where people can be rescued by a ladder by intervention forces
	Image content Human figure, window, firefighting vehicle with ladder
Hazard Not being able to locate a rescue window to be rescued by intervention forces	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a rescue window	
Additional information This safety sign shall be placed inside the building. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E018
	Referent Turn anticlockwise to open
	Function To signify that the doorknob of a security door on an escape route must be turned in an anticlockwise direction in order for the opening device to operate
	Image content Doorknob with semicircular anticlockwise arrow
Hazard Being unable to open a door on an escape route which has a security lock and an emergency opening device	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Turning the doorknob in an anticlockwise direction in order to open a door on an escape route which has a security lock	
Additional information This safety sign is intended to be used only on doors with a security locking mechanism. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E019
	Referent
	Turn clockwise to open
	Function
	To signify that the doorknob of a security door on an escape route must be turned in a clockwise direction in order for the opening device to operate
	Image content
	Doorknob with semicircular clockwise arrow
Hazard Being unable to open a door on an escape route which has a security lock and an emergency opening device Human behaviour that is intended to be caused after understanding the safety sign's meaning Turning the doorknob in a clockwise direction in order to open a door on an escape route which has a security lock Additional information This safety sign is intended to be used only on doors with a security locking mechanism. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E020
	Referent
	Emergency stop button
	Function
	To indicate the location of an emergency stop button
	Image content
	Hand over button shape, two lines
Hazard Not being able to locate an emergency stop button	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an emergency stop button	
Additional information The actuator of the emergency stop device itself is likely to be coloured red (see e.g. ISO 13850, IEC 60601-1). Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E021
	Referent
	Protection shelter
	Function
	To indicate the location of a protection shelter
	Image content
	Four human figures within an irregular hexagon, line and shield
Hazard Not being able to locate a protection shelter Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a protection shelter Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E022
	Referent Door opens by pushing on the left-hand side
	Function To indicate that the door opens by pushing on the left-hand side
	Image content Doorway with door opening outwards, curved arrow pointing to the left
Hazard Not being able to open the door Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware that the door opens by pushing on the left-hand side Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

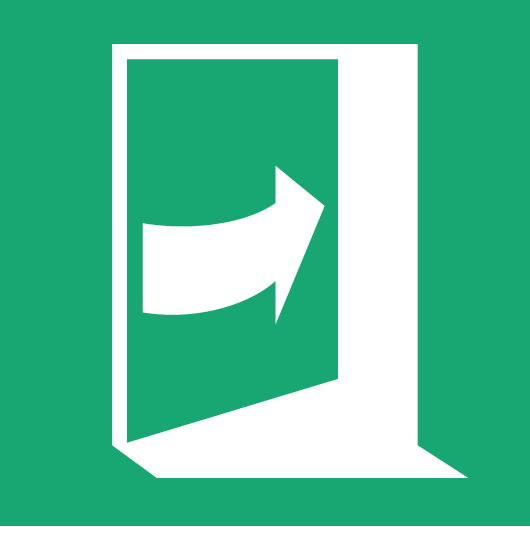
	Reference No. ISO 7010-E023
	Referent Door opens by pushing on the right-hand side
	Function To indicate that the door opens by pushing on the right-hand side
	Image content Doorway with door opening outwards, curved arrow pointing to the right
Hazard Not being able to open the door Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware that the door opens by pushing on the right-hand side Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E024
	Referent Evacuation temporary refuge
	Function To indicate the location of a temporary safe area (refuge) to await rescue assistance, provided for those unable to use stairs in the event of an evacuation
	Image content Human figure in wheelchair (right-hand profile), four white arrows coming from the corners pointing to it
Hazard Not being able to locate an area provided for temporary waiting for rescue assistance for those unable to use stairs in the event of an evacuation	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an area provided for temporary waiting for rescue assistance for those unable to use stairs in the event of an evacuation	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E025
	Referent Emergency hammer
	Function To indicate the location of an emergency hammer
	Image content Emergency hammer with glass cracked around the point of the hammer
Hazard Not being able to locate an emergency hammer	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an emergency hammer	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E026
	Referent Emergency exit for people unable to walk or with walking impairment (left)
	Function To indicate an escape route to a place of safety usable by people unable to walk or with walking impairment
	Image content Human figure in wheelchair (left-hand profile), which drives through a door frame (left)
Hazard Not being able to locate an escape route to a place of safety, which is usable for the evacuation of people unable to walk or with walking impairment	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an escape route to a place of safety, which can be used by people unable to walk or with walking impairment	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information. This safety sign shall be accompanied by ISO 7010-E001 or ISO 7010-E002.	

Table 3 (continued)

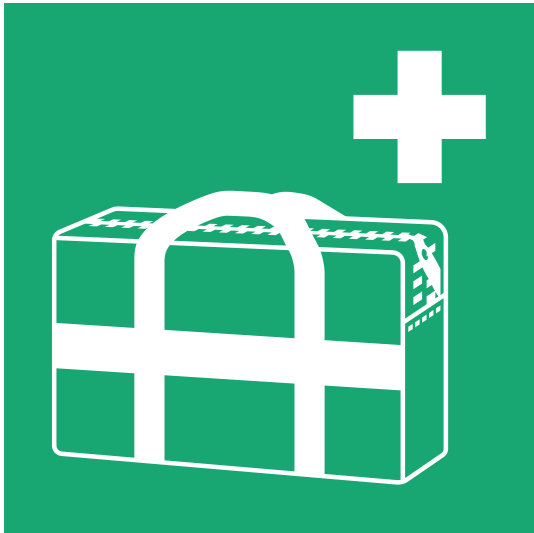
	Reference No.
	ISO 7010-E027
	Referent
	Medical grab bag
	Function
	To indicate the location of a medical grab bag
	Image content
	Bag (outlined) with handles, first aid cross
Hazard Not being able to locate a medical grab bag	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a medical grab bag	
Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E028
	Referent Oxygen resuscitator
	Function To indicate the location of an oxygen resuscitator
	Image content Oxygen cylinder with manual control, hose line and mask, first aid cross
Hazard Not being able to locate an oxygen resuscitator	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an oxygen resuscitator	
Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E029
	Referent
	Emergency escape breathing device
	Function
	To indicate the location of an emergency escape breathing device (EEBD)
	Image content
	Full-face mask with regulator (front view), first aid cross
Hazard Not being able to locate an EEBD Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an EEBD Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E030
	Referent Emergency exit for people unable to walk or with walking impairment (right)
	Function To indicate an escape route to a place of safety usable by people unable to walk or with walking impairment
	Image content Human figure in wheelchair (right-hand profile), which drives through a door frame (right)
Hazard Not being able to locate an escape route to a place of safety, which is usable for the evacuation of people unable to walk or with walking impairment	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an escape route to a place of safety, which can be used by people unable to walk or with walking impairment	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information. This safety sign shall be accompanied by ISO 7010-E001 or ISO 7010-E002.	

Table 3 (continued)

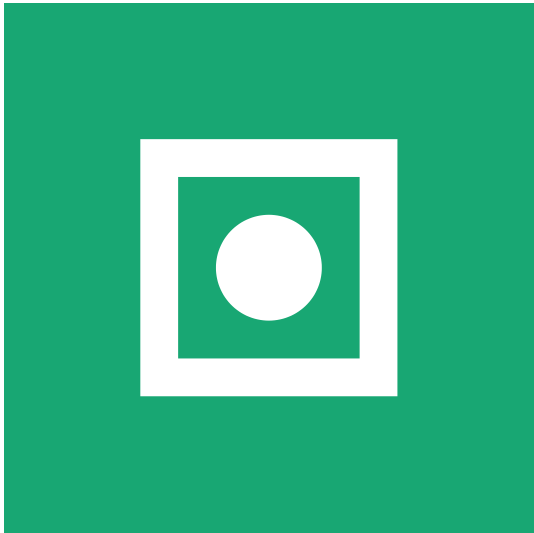
	Reference No.
	ISO 7010-E031
	Referent
	Shipboard general alarm
	Function
	To indicate the location of a general alarm button on board ship
	Image content
	Circle in a square (outlined)
Hazard Not being able to locate a general alarm button on board ship	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Crew being aware of the location of a general alarm button	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

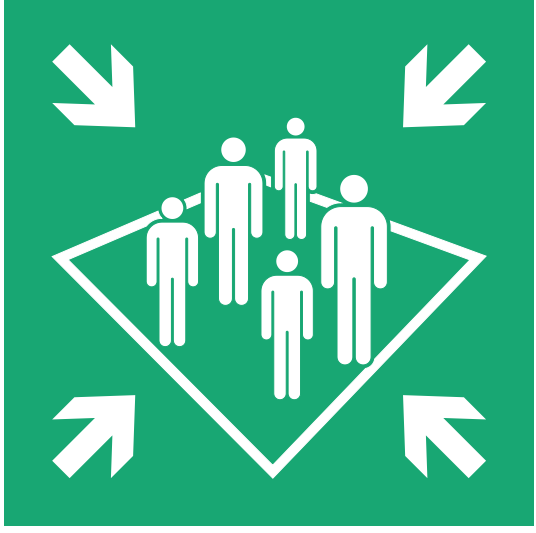
	Reference No. ISO 7010-E032
	Referent Shipboard assembly station
	Function To indicate the location of an assembly station on board ship
	Image content Five human figures in different sizes standing on a square, four arrows coming from the corners pointing to them
Hazard Not being able to locate an assembly station on board ship	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an assembly station on board ship	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

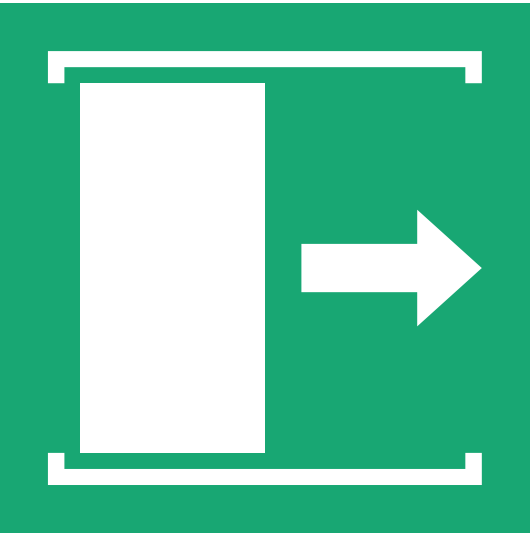
	Reference No. ISO 7010-E033
	Referent Door slides right to open
	Function To indicate the direction in which a sliding door opens
	Image content Rectangle bordered top and bottom, arrow pointing to the right
Hazard Not being able to determine the direction of movement of a sliding door	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being able to discern a sliding door which opens to the right	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

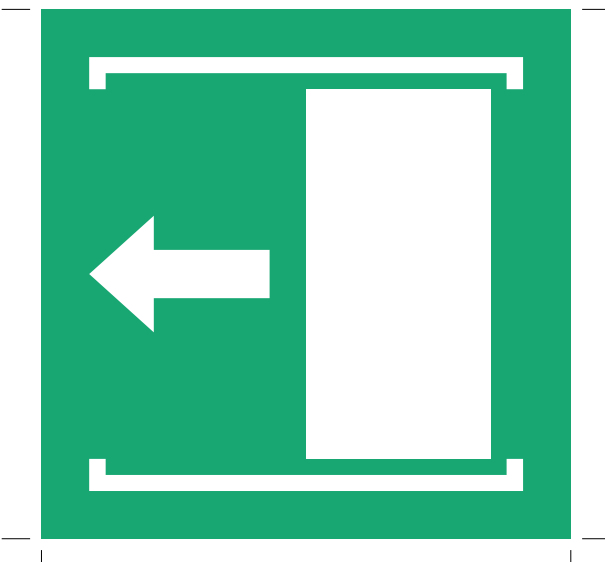
	Reference No. ISO 7010-E034
	Referent Door slides left to open
	Function To indicate the direction in which a sliding door opens
	Image content Rectangle bordered top and bottom, arrow pointing to the left
Hazard Not being able to determine the direction of movement of a sliding door	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being able to discern a sliding door which opens to the left	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E035
	Referent Liferaft knife
	Function To indicate the location of a liferaft knife
	Image content Liferaft knife (with rounded tip and drilled-out holes in blade) between sliced braided rope
Hazard Not being able to locate a liferaft knife	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a liferaft knife	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

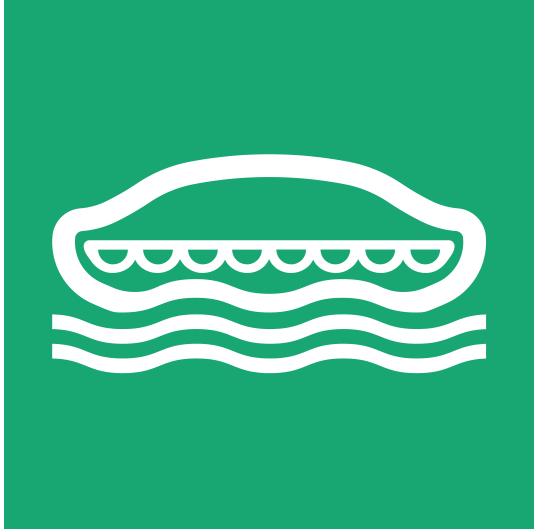
	Reference No.
	ISO 7010-E036
	Referent
	Lifeboat
	Function
	To indicate the location of a lifeboat
	Image content
	Lifeboat, two wavy lines
Hazard Not being able to locate a lifeboat	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a lifeboat	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E037
	Referent
	Rescue boat
	Function
	To indicate the location of a rescue boat
	Image content
	Boat, two upper human figures, one of them outlined, two wavy lines
Hazard Not being able to locate a rescue boat	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a rescue boat	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E038
	Referent Liferaft
	Function To indicate the location of a liferaft
	Image content Liferaft, two wavy lines
Hazard Not being able to locate a liferaft	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a liferaft	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E039
	Referent Davit-launched liferaft
	Function To indicate the location of a davit-launched liferaft
	Image content Liferaft suspended from single point davit
Hazard Not being able to locate a davit-launched liferaft	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a davit-launched liferaft	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E040
	Referent Lifebuoy
	Function To indicate the location of a lifebuoy
	Image content Ring buoy with four becketed lines
Hazard Not being able to locate a lifebuoy	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a lifebuoy	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E041
	Referent
	Lifebuoy with line
	Function
	To indicate the location of a lifebuoy with line
	Image content
	Ring buoy with four becketed lines and attached segmented line
Hazard Not being able to locate a lifebuoy with line Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a lifebuoy with line Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

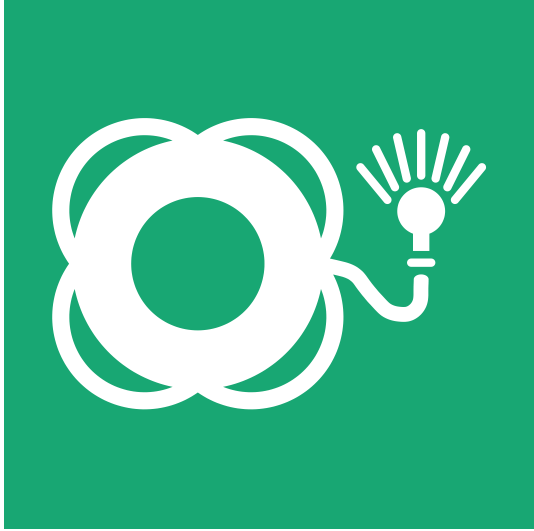
	Reference No. ISO 7010-E042
	Referent Lifebuoy with light
	Function To indicate the location of a lifebuoy with light
	Image content Ring buoy with four becketed lines and attached light
Hazard Not being able to locate a lifebuoy with light	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a lifebuoy with light	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E043
	Referent Lifebuoy with line and light
	Function To indicate the location of a lifebuoy with line and light
	Image content Ring buoy with four becketed lines and attached segmented line and light
Hazard Not being able to locate a lifebuoy with line and light	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a lifebuoy with line and light	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

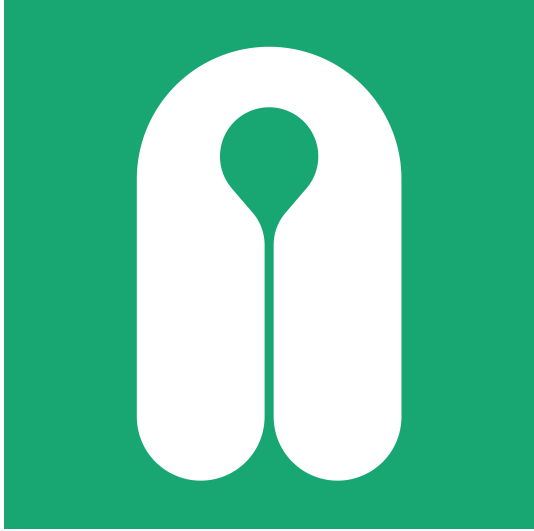
	Reference No. ISO 7010-E044
	Referent Lifejacket
	Function To indicate the location of a lifejacket
	Image content Lifejacket
Hazard Not being able to locate a lifejacket	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a lifejacket	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E045
	Referent Child's lifejacket
	Function To indicate the location of a child's lifejacket
	Image content Lifejacket with walking child on one lobe
Hazard Not being able to locate a child's lifejacket	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a child's lifejacket	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E046
	Referent Infant's lifejacket
	Function To indicate the location of an infant's lifejacket
	Image content Lifejacket with infant in diaper on one lobe
Hazard Not being able to locate an infant's lifejacket	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an infant's lifejacket	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E047
	Referent Search and rescue transponder
	Function To indicate the location of a search and rescue transponder (SART)
	Image content Transponder with arrow pointing towards antenna and an arrow pointing away
Hazard Not being able to locate a SART	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a SART	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E048
	Referent Survival craft distress signal
	Function To indicate the location of a survival craft distress signal
	Image content Bursting star at the end of a curved path of diminishing width
Hazard Not being able to locate a survival craft distress signal	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a survival craft distress signal	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E049
	Referent Rocket parachute flare
	Function To indicate the location of a rocket parachute flare
	Image content Bursting star suspended from a parachute
Hazard Not being able to locate a rocket parachute flare	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a rocket parachute flare	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E050
	Referent Line-throwing appliance
	Function To indicate the location of a line-throwing appliance
	Image content Barrel-mounted rocket with attached segmented line
Hazard Not being able to locate a line-throwing appliance	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a line-throwing appliance	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E051
	Referent Two-way VHF radiotelephone apparatus
	Function To indicate the location of a two-way VHF radiotelephone apparatus
	Image content Hand holding radiotelephone with three-prong antenna, three curved lines on each side
Hazard Not being able to locate a two-way VHF radiotelephone apparatus	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a two-way VHF radiotelephone apparatus	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E052
	Referent Emergency position indicating radio beacon
	Function To indicate the location of an emergency position indicating radio beacon (EPIRB)
	Image content Radio beacon with three-prong antenna, three curved lines on each side
Hazard Not being able to locate an EPIRB	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an EPIRB	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E053
	Referent
	Embarkation ladder
	Function
	To indicate the location of an embarkation ladder
	Image content
	Ladder (six horizontal lines between two parallel vertical lines), two wavy lines
Hazard Not being able to locate an embarkation ladder	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an embarkation ladder	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E054
	Referent Marine evacuation slide
	Function To indicate the location of a marine evacuation slide
	Image content Slide terminating in open raft, two wavy lines
Hazard Not being able to locate a marine evacuation slide	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a marine evacuation slide	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

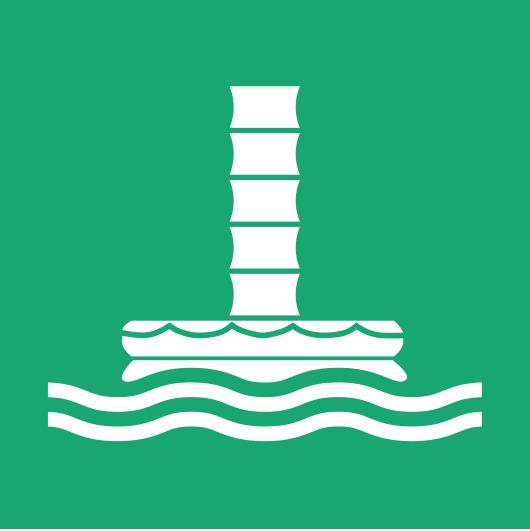
	Reference No.
	ISO 7010-E055
	Referent
	Marine evacuation chute
	Function
	To indicate the location of a marine evacuation chute
	Image content
	Chute, liferaft, two wavy lines
Hazard Not being able to locate a marine evacuation chute	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a marine evacuation chute	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

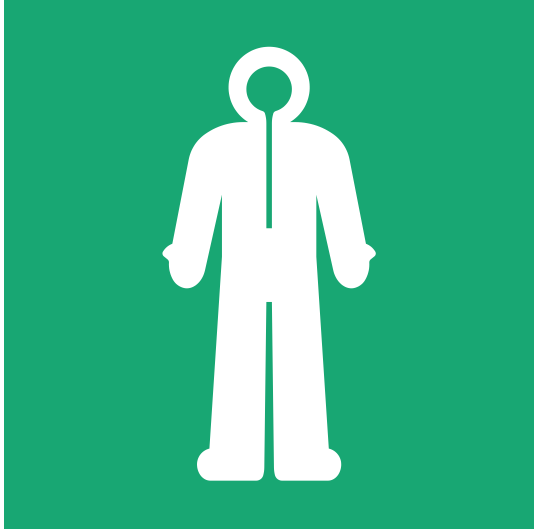
	Reference No. ISO 7010-E056
	Referent Survival clothing
	Function To indicate the location of survival clothing
	Image content Standing full body survival suit with hood
Hazard Not being able to locate survival clothing	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of survival clothing	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

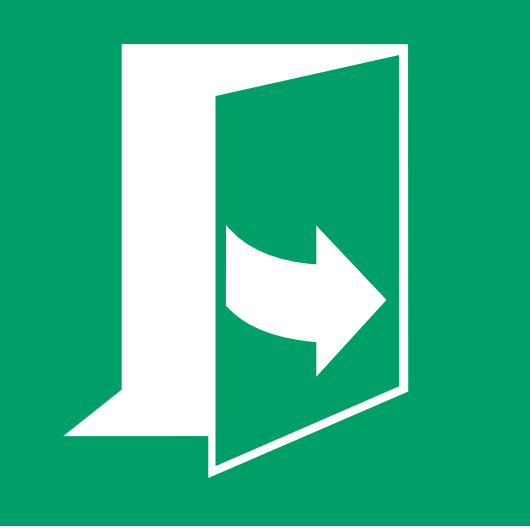
	Reference No. ISO 7010-E057
	Referent Door opens by pulling on the left-hand side
	Function To indicate that the door opens by pulling on the left-hand side
	Image content Doorway with door opening inwards, curved arrow pointing to the right
Hazard Not being able to open the door	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware that the door opens by pulling on the left-hand side	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

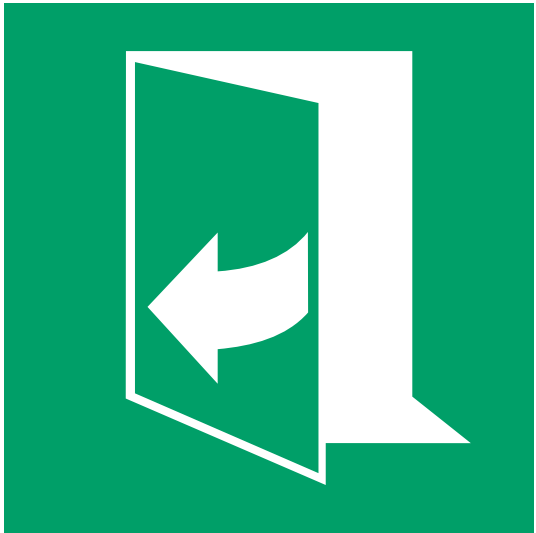
	Reference No. ISO 7010-E058
	Referent Door opens by pulling on the right-hand side
	Function To indicate that the door opens by pulling on the right-hand side
	Image content Doorway with door opening inwards, curved arrow pointing to the left
Hazard Not being able to open the door Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware that the door opens by pulling on the right-hand side Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E059
	Referent Escape ladder
	Function To indicate the location of a permanently fixed escape ladder
	Image content Ladder (six horizontal lines between two parallel vertical lines)
Hazard Not being able to locate a fixed escape ladder and identify it as such	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fixed escape ladder	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E060
	Referent Evacuation chair
	Function To indicate the location of an evacuation chair
	Image content Human figure sitting in an evacuation chair, human figure handling the evacuation chair, staircase (all right-hand profile)
Hazard Not being able to locate an evacuation chair	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an evacuation chair	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No. ISO 7010-E061
	Referent Water life-saving equipment
	Function To indicate the location of water life-saving equipment
	Image content Lifebelt ring with rope
Hazard Not being able to locate the public rescue equipment which is provided to assist in the avoidance of drowning	
Human behaviour that is intended to be caused after understanding the safety sign's meaning People being aware of location of public rescue equipment at the time of need	
Additional information A supplementary sign shall be used to give further information about the kind of water life-saving equipment. Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 3 (continued)

	Reference No. ISO 7010-E062
	Referent Tsunami evacuation area
	Function To indicate the location of a safe place/uphill area for evacuation to in the event of a tsunami
	Image content Human figure (moving to the right) between a slope of land mass and a tsunami wave
Hazard Tsunami wave originating from an ocean-floor seismic event in which people could be caught if they have not reached the tsunami evacuation area	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Evacuation from coastal/beach zone towards higher place/hill in the event of an earthquake or when a tsunami warning has been issued	
Additional information This water safety sign has been the subject of extensive research by the Japanese government and has also been requested by UNESCO as part of an overall approach to a management strategy designed to mitigate the disastrous effects of a tsunami wave. The design selected has received the best comprehension results and is specific to the special circumstances of the tsunami hazard. Supplementary text shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	Reference No.
	ISO 7010-E063
	Referent
	Tsunami evacuation building
	Function
	To indicate the location of a safe building for evacuation in the event of a tsunami
	Image content
	Human figure between a building and a tsunami wave
Hazard Tsunami wave originating from an ocean-floor seismic event in which people could be caught if they have not reached the tsunami evacuation building Human behaviour that is intended to be caused after understanding the safety sign's meaning Evacuation from coastal/beach zone towards a tsunami evacuation building in the event of an earthquake or when a tsunami warning has been issued Additional information This water safety sign has been the subject of extensive research by the Japanese government and has also been requested by UNESCO as part of an overall approach to a management strategy designed to mitigate the disastrous effects of a tsunami wave. The design selected has received the best comprehension results and is specific to the special circumstances of the tsunami hazard. Supplementary text shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 — Description and application of referent for fire equipment signs (category F)

	Reference No. ISO 7010-F001
	Referent Fire extinguisher
	Function To indicate the location of a fire extinguisher
	Image content Fire extinguisher (profile) with label, flame determinant
Hazard Not being able to locate a fire extinguisher	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire extinguisher	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No.
	ISO 7010-F002
	Referent
	Fire hose reel
	Function
	To indicate the location of a fire hose reel
	Image content
	Seven vertical lines, one with a trapezoid underneath, circle with cross and line attached to vertical bar, flame determinant
Hazard Not being able to locate a fire hose reel Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire hose reel Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No. ISO 7010-F003
	Referent Fire ladder
	Function To indicate the location of a ladder that is to be used exclusively for firefighting
	Image content Two converging vertical lines, six horizontal lines joining the vertical lines, flame determinant
Hazard Not being able to locate a fire ladder	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire ladder and recognizing that the use of this ladder is dedicated to firefighting only	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No. ISO 7010-F004
	Referent Collection of firefighting equipment
	Function To indicate the location of firefighting equipment
	Image content Fire helmet (profile), flame determinant
Hazard Not being able to locate firefighting equipment	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of firefighting equipment	
Additional information This safety sign should be used for firefighting equipment for which there is no registered safety sign. The fire helmet may be replaced with another fire helmet appropriate to cultural requirements. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No. ISO 7010-F005
	Referent Fire alarm call point
	Function To indicate the location of a fire alarm call point
	Image content Hand (plan view) with one finger extended, dot in square (outlined) broken at bottom, flame determinant
Hazard Not being able to locate a fire alarm call point	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire alarm call point	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No.
	ISO 7010-F006
	Referent
	Fire emergency telephone
	Function
	To indicate the location of a fire emergency telephone
	Image content
	Telephone receiver (profile), flame determinant
Hazard Not being able to locate a fire emergency telephone	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire emergency telephone	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No. ISO 7010-F007
	Referent Fire protection door
	Function To indicate the location of a fire protection door
	Image content Door at angle, curved arrow, flame determinant
Hazard Not being able to locate and identify a fire protection door	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Identifying the door as a fire protection door	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No.
	ISO 7010-F008
	Referent
	Fixed fire extinguishing battery
	Function
	To indicate the location of a fixed fire extinguishing battery
	Image content
	Four bottles attached to a manifold, flame determinant
Hazard Not being able to locate a fixed fire extinguishing battery Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fixed fire extinguishing battery Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No. ISO 7010-F009
	Referent Wheeled fire extinguisher
	Function To indicate the location of a wheeled fire extinguisher
	Image content Bottle on wheeled cart (profile), flame determinant
Hazard Not being able to locate a wheeled fire extinguisher	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a wheeled fire extinguisher	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No.
	ISO 7010-F010
	Referent
	Portable foam applicator unit
	Function
	To indicate the location of a portable foam applicator unit
	Image content
	Foam can with goose neck hose terminating with a venturi nozzle, flame determinant
Hazard Not being able to locate a portable foam applicator unit Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a portable foam applicator unit Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No. ISO 7010-F011
	Referent Water fog applicator
	Function To indicate the location of a water fog applicator
	Image content 90° bend terminating in a nozzle with five non-parallel segmented lines, flame determinant
Hazard Not being able to locate a water fog applicator	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a water fog applicator	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No.
	ISO 7010-F012
	Referent
	Fixed fire extinguishing installation
	Function
	To indicate the location of a fixed fire extinguishing installation
	Image content
	Tank (profile) supported on a frame at two points, flame determinant
Hazard Not being able to locate a fixed fire extinguishing installation Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fixed fire extinguishing installation Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No. ISO 7010-F013
	Referent Fixed fire extinguishing bottle
	Function To indicate the location of a fixed fire extinguishing bottle
	Image content Bottle (head-on view) supported on its side on a frame at two points, flame determinant
Hazard Not being able to locate a fixed fire extinguishing bottle	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fixed fire extinguishing bottle	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No. ISO 7010-F014
	Referent Remote release station
	Function To indicate the location of a remote release station
	Image content Bottle with a knob handle on top, flame determinant
Hazard Not being able to locate a remote release station	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a remote release station	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No. ISO 7010-F015
	Referent Fire monitor
	Function To indicate the location of a fire monitor
	Image content Fire monitor (profile), flame determinant
Hazard Not being able to locate a fire monitor	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire monitor	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	Reference No.
	ISO 7010-F016
	Referent
	Fire blanket
	Function
	To indicate the location of a fire blanket
	Image content
	Human figure holding a fire blanket, flame determinant
Hazard Not being able to locate a fire blanket Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire blanket Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 — Description and application of referent for mandatory action signs (category M)

	Reference No. ISO 7010-M001
	Referent General mandatory action sign
	Function To signify a mandatory action
	Image content Exclamation mark
Hazard Risk to people not following the mandatory action specified by the supplementary sign	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Carrying out the mandatory action specified by the supplementary sign	
Additional information This safety sign cannot be used on its own and requires a supplementary sign to give further information about the action to be taken.	

Table 5 (continued)

	Reference No. ISO 7010-M002
	Referent Refer to instruction manual/booklet
	Function To signify that the instruction manual/booklet must be read
	Image content Upper human figure (right-hand profile) holding an open manual/booklet
Hazard Not reading the instruction manual/booklet before starting work or before operating equipment or machinery	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Reading the instruction manual/booklet before starting work or before operating equipment or machinery	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M003
	Referent Wear ear protection
	Function To signify that ear protection must be worn
	Image content Human head (front view) wearing ear protection
Hazard Noise	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing ear protection	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

	Reference No. ISO 7010-M004
	Referent Wear eye protection
	Function To signify that eye protection must be used
	Image content Human head (front view) wearing eye protection
Hazard Flying objects/particles	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing eye protection	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

	Reference No.
	ISO 7010-M005
	Referent
	Connect an earth terminal to the ground
	Function
	To signify that an earth terminal must be connected
	Image content
	Vertical line joining horizontal line with two progressively shorter parallel horizontal lines underneath
Hazard Electric shock, explosion, fire	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Connecting an earth terminal of a product to the ground	
Additional information This safety sign relates to products employing a class I insulating system which requires protective earthing. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

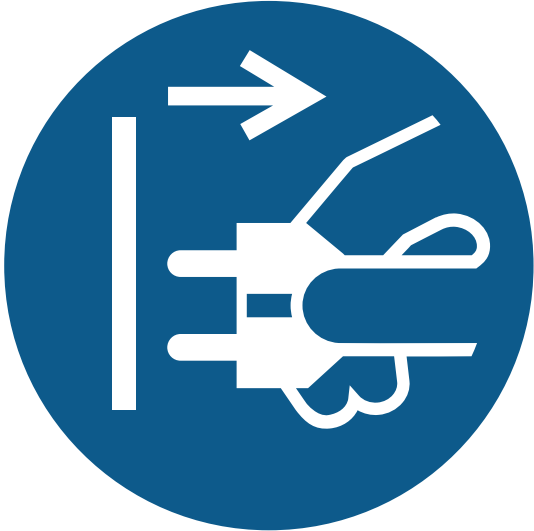
	Reference No. ISO 7010-M006
	Referent Disconnect mains plug from electrical outlet
	Function To signify that the mains plug must be disconnected from electrical outlet for the purposes of maintenance of electrical equipment, in the case of malfunction or when left unattended
	Image content Two fingers and thumb (outlined) holding a two-pin electrical plug, arrow pointing right, vertical line
Hazard Electric shock, fire Human behaviour that is intended to be caused after understanding the safety sign's meaning Disconnecting the mains plug for the purposes of maintenance, in the case of malfunction or when left unattended Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. If necessary, a supplementary sign shall be used to give further information on when to disconnect the mains plug from electrical outlet.	

Table 5 (continued)

	Reference No. ISO 7010-M007
	Referent Opaque eye protection must be worn
	Function To signify that opaque eye protection must be worn
	Image content Human head (front view) wearing opaque eye protection
Hazard Visible or invisible rays	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Ensuring that people undergoing treatment with visible or invisible rays are wearing opaque eye protection	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M008
	Referent Wear safety footwear
	Function To signify that safety footwear must be worn
	Image content Two safety boots, one shown in front, the other shown behind (outlined)
Hazard Feet striking or being struck by objects or being in contact with thermal or chemical materials	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing safety footwear	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

	Reference No. ISO 7010-M009
	Referent Wear protective gloves
	Function To signify that protective gloves must be worn
	Image content Two protective gloves, one shown in front, the other shown behind (outlined)
Hazard Hands striking or being struck by objects or being in contact with thermal or chemical materials	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing protective gloves	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

	Reference No. ISO 7010-M010
	Referent Wear protective clothing
	Function To signify that protective clothing must be worn
	Image content Overall (front view)
Hazard Chemicals, heat or cold	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing protective clothing	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No.
	ISO 7010-M011
	Referent
	Wash your hands
	Function
	To signify that hands must be washed
	Image content
	Two hands, one shown in front, the other shown behind (outlined), three lines of four dots, tap
Hazard Infection or contamination	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Washing hands before starting work task and after finishing work task	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M012
	Referent Use handrail
	Function To signify that the handrail must be used
	Image content Upper human figure (left-hand profile) with left arm touching diagonal line
Hazard Falling, slipping or tripping	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Holding the handrail when using stairs, escalators or moving walkways	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M013
	Referent Wear a face shield
	Function To signify that a face shield must be worn
	Image content Human head (left-hand profile, outlined) wearing a face shield
Hazard Flying objects/particles	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing a face shield	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M014
	Referent Wear head protection
	Function To signify that head protection must be worn
	Image content Human head (left-hand profile, outlined) wearing head protection
Hazard Objects falling on head or head striking objects	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing head protection	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

	Reference No. ISO 7010-M015
	Referent Wear high-visibility clothing
	Function To signify that high-visibility clothing must be worn
	Image content Sleeveless jacket (front view) with two vertical and two horizontal lines
Hazard Moving vehicles or equipment	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing high-visibility clothing	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M016
	Referent Wear a mask
	Function To signify that a face mask must be worn
	Image content Human head (left-hand profile, outlined) wearing a mask
Hazard Particulates in the air	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing a face mask	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

	Reference No. ISO 7010-M017
	Referent Wear respiratory protection
	Function To signify that respiratory protection must be worn
	Image content Human head (front view, outlined) wearing respiratory protection
Hazard Harmful substances (e.g. noxious gases)	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing respiratory protection	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M018
	Referent Wear a safety harness
	Function To signify that a safety harness must be worn
	Image content Human figure (outlined) wearing a safety harness
Hazard Falling from a height	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing a safety harness	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M019
	Referent Wear a welding mask
	Function To signify that a welding mask must be worn
	Image content Human head (left-hand profile, outlined) wearing a welding mask
Hazard Hot flying particles, intense light and UV radiation from welding activity	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing a welding mask	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

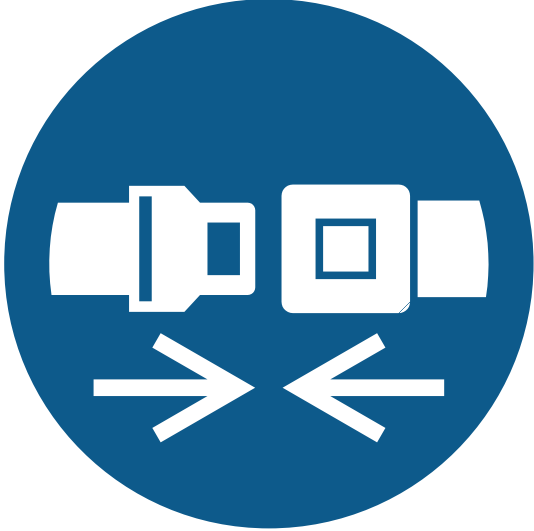
	Reference No.
	ISO 7010-M020
	Referent
	Wear safety belts
	Function
	To signify that safety belts must be used
	Image content
	End of belts with a buckle and two arrows pointing to each other
Hazard Being projected from the seat of a vehicle or equipment Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing safety belts Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M021
	Referent Disconnect before carrying out maintenance or repair
	Function To signify that the machine or the equipment, which is not connected to mains by a plug, has to be disconnected from all sources of power before carrying out maintenance or repair
	Image content Horizontal arrow pointing to the right; one vertical short thick line attached to a circle at the bottom with a longer thick line at an angle to the right attached to the top of the circle; a further thick line in the same plane as the lower one, separated from the line at an angle
Hazard Machine or equipment running during maintenance or repair	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Disconnecting the machine or equipment before carrying out maintenance or repair	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No.
	ISO 7010-M022
	Referent
	Use barrier cream
	Function
	To signify that the skin has to be protected with an appropriate barrier cream
	Image content
	Human hand, tube, wavy line
Hazard Damage to the skin Human behaviour that is intended to be caused after understanding the safety sign's meaning Protecting the skin with barrier cream before starting work or putting on gloves Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No.
	ISO 7010-M023
	Referent
	Use footbridge
	Function
	To signify that a footbridge must be used
	Image content
	Human figure walking on a footbridge
Hazard Moving vehicles, obstructions, or tripping or falling	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Using the footbridge to avoid dangerous areas	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No.
	ISO 7010-M024
	Referent
	Use this walkway
	Function
	To signify that pedestrians must use a designated walkway
	Image content
	Human figure walking (left hand)
Hazard Areas unsafe for pedestrians	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Pedestrians using the designated walkway	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M025
	Referent Protect infant's eyes with opaque eye protection
	Function To signify that opaque eye protection must be worn by an infant
	Image content Infant (outlined) wearing opaque eye protection
Hazard Intense light incident on an infant's eyes	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Ensuring that the infant's eyes are protected before switching the equipment on or before placing the infant into the radiated area	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M026
	Referent Use protective apron
	Function To signify that the front of the body must be protected by an apron
	Image content Human figure (outlined) with an apron
Hazard Front of body striking or being struck by objects or coming into contact with substances or materials	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Protecting the front of the body	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

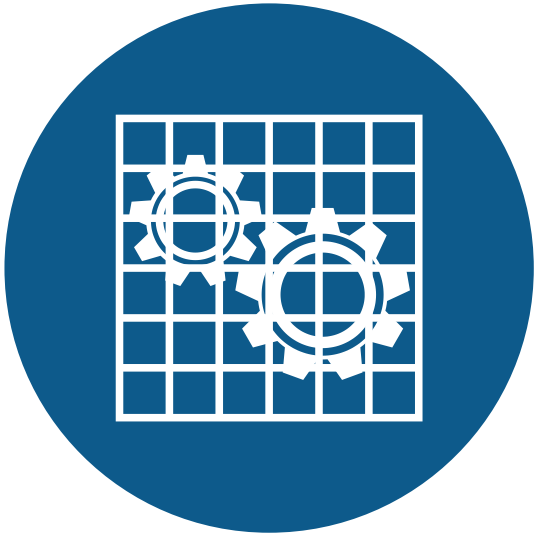
	Reference No. ISO 7010-M027
	Referent Check guard
	Function To signify that checks must be conducted to ensure that guards are in place or used
	Image content Series of horizontal and vertical lines and two interlocking illustrations of cog wheels
Hazard Moving machinery	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Ensuring that guards are in place before operating the machinery	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M028
	Referent Keep locked
	Function To signify that a cabinet or facility must be kept locked
	Image content Padlock with keyhole and four complete chain links and two pieces
Hazard Access to harmful substances or equipment	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Ensuring that cabinets or facilities containing harmful substances or equipment are kept locked	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No.
	ISO 7010-M029
	Referent
	Sound horn
	Function
	To signify that a horn must be sounded
	Image content
	Horn, three curved lines
Hazard Collision with another vehicle or with people	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Equipment operator or driver sounding horn	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M030
	Referent Use litter bin
	Function To signify that litter must be placed in a litter bin
	Image content Human figure, bin/container and four diamond shapes
Hazard Material which is harmful or could create a tripping or slipping hazard	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Putting litter in a bin or container	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary sign shall be used to specify the kind of litter to be placed in the litter bin.	

Table 5 (continued)

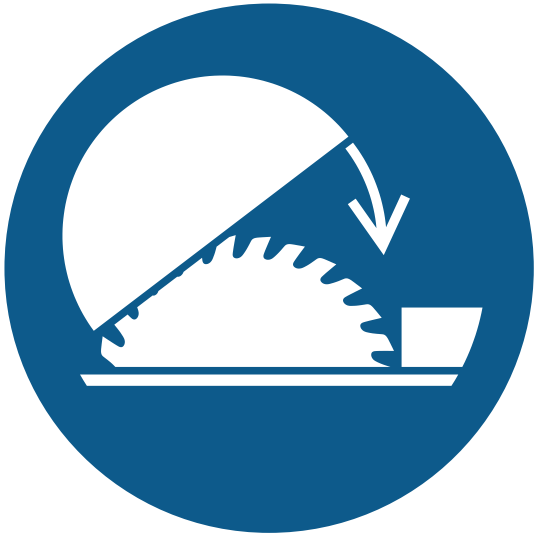
	Reference No. ISO 7010-M031
	Referent Use table saw adjustable guard
	Function To signify that the adjustable guard must be used
	Image content Semicircular saw blade with semicircular cover, curved arrow pointing downwards, single line and block shape
Hazard Circular saw	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Ensuring that the saw is guarded	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M032
	Referent Wear anti-static footwear
	Function To signify that anti-static footwear must be worn
	Image content End of leg, shoe with lightning bolt on sole
Hazard Creation of static electricity that can cause sparks leading to fire and explosions	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing anti-static footwear	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M033
	Referent Close safety bar of chairlift
	Function To signify that the safety bar of the chairlift must be closed
	Image content Human figure (right-hand profile) sitting in chairlift with safety bar up, curved arrow pointing downwards
Hazard Safety bar closed too late	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Closing the safety bar of a chairlift	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M034
	Referent Open safety bar of chairlift
	Function To signify that the safety bar of the chairlift must be opened
	Image content Human figure (right-hand profile) sitting in chairlift with safety bar down, curved arrow pointing upwards
Hazard Safety bar opened too early	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Opening the safety bar of a chairlift	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M035
	Referent Immediately leave the tow-track in the event of falling
	Function To signify that the tow-track must be left immediately in the event of falling
	Image content Human figure on skis, two parallel straight lines, arrow pointing to the right
Hazard Obstruction on the tow-track Human behaviour that is intended to be caused after understanding the safety sign's meaning Leaving the tow-track after falling Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M036
	Referent Lift ski tips
	Function To signify that ski tips must be lifted
	Image content Human figure (right-hand profile) with skis sitting in chairlift, arrow pointing upwards
Hazard Crashing of the ski tips into technical parts of the cableway	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Lifting the ski tips	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M037
	Referent Close and secure hatches in launch sequence
	Function To signify that hatches on a lifeboat, fully enclosed rescue boat or rigid liferaft must be closed and secured in launch sequence
	Image content Hand around a hatch handle with arrow pointing to the right above curved arrow pointing in clockwise direction
Hazard Uncontrolled flooding, exposure to a hazardous atmosphere, loss of breathable air from the self-contained air support system, fire and smoke	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Closing and securing hatches at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M038
	Referent Start engine in launch sequence
	Function To signify that the engine of a lifeboat or rescue boat must be started in launch sequence
	Image content Handcrank and curved arrow pointing in clockwise direction
Hazard No propulsion at the time of need or the engine is started too early in the sequence to launch	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Starting the engine at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

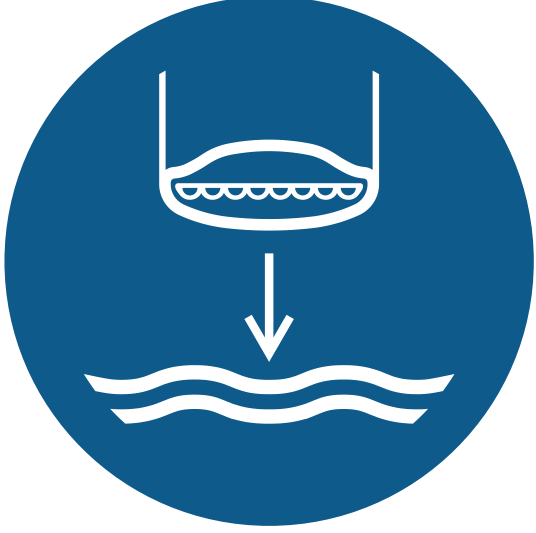
	Reference No.
	ISO 7010-M039
	Referent
	Lower lifeboat to the water in launch sequence
	Function
	To signify that the lifeboat must be lowered in launch sequence
	Image content
	Lifeboat on two falls, arrow pointing down, two wavy lines
Hazard Lifeboat is not lowered to the water at the appropriate time	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Lowering the lifeboat at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M040
	Referent Lower liferaft to the water in launch sequence
	Function To signify that the liferaft must be lowered in launch sequence
	Image content Liferaft on single fall, arrow pointing down, two wavy lines
Hazard Liferaft is not lowered to the water at the appropriate time	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Lowering the liferaft at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M041
	Referent Lower rescue boat to the water in launch sequence
	Function To signify that the rescue boat must be lowered in launch sequence
	Image content Boat on two falls, two upper human figures, one of them outlined, arrow pointing down, two wavy lines
Hazard Rescue boat is not lowered to the water at the appropriate time	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Lowering the rescue boat at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M042
	Referent Release falls in launch sequence
	Function To signify that the lifeboat or rescue boat falls must be released in launch sequence
	Image content Hook on pivot attached to two sloping lines, curved arrow pointing in anticlockwise direction from a U-shape
Hazard Lifeboat or rescue boat release hook is not released from the fall or falls at the appropriate time	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Releasing falls at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M043
	Referent Start water spray in launch sequence
	Function To signify that the water spray system for a lifeboat must be energized in launch sequence
	Image content Nozzle and dotted lines above lifeboat
Hazard Fire on or near the water surface or hazardous cargo release that may contaminate the outer surface of the boat	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Energizing the water spray system at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M044
	Referent Start air supply in launch sequence
	Function To signify that the self-contained air support system must be energized in launch sequence
	Image content Bellows with three arrows at the nozzle pointing away in a radial pattern
Hazard Fire and/or hazardous atmosphere that consumes oxygen necessary to sustain life inside the lifeboat and provide combustion air for the diesel propulsion engine of the lifeboat	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Energizing the self-contained air support system at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M045
	Referent Release lifeboat gripes in launch sequence
	Function To signify that the lifeboat gripes must be released in launch sequence
	Image content Lifeboat suspended on a fall in a davit with a gripe surrounding the boat; arrow pointing at the release point of the gripe
Hazard Lifeboat remains secured to the cradle and davit and cannot be lowered	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Releasing the gripes of a lifeboat at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M046
	Referent Secure gas cylinders
	Function To signify that gas cylinders must be secured
	Image content Upper part of gas cylinder, chain
Hazard Falling gas cylinder causing crush, explosion or release of gas	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Securing gas cylinders	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M047
	Referent Use self-contained breathing appliance
	Function To signify that a self-contained breathing appliance must be used
	Image content Upper human figure (left-hand profile, outlined) wearing a compressed air cylinder and mask connected by a tube
Hazard Harmful gases and lack of oxygen Human behaviour that is intended to be caused after understanding the safety sign's meaning Using a self-contained breathing appliance Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M048
	Referent Use gas detector
	Function To signify that a gas detector must be used
	Image content Front of a block with a small cylinder on top and on the front plane a curved scale with markers and pointer; three curved arrows; three lines with several curves
Hazard Hazardous gases or vapours, explosive atmosphere	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Using a gas detector	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M049
	Referent Wear protective roller sport equipment
	Function To signify that protective roller sport equipment must be worn
	Image content Human figure (outlined) wearing head, wrist, palm, knee and elbow protectors
Hazard Unprotected body and limb impacts with surfaces and obstacles	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing protective roller sport equipment when doing roller sport	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M050
	Referent Alighting from toboggan to the left
	Function To signify that the user must alight from toboggan to the left
	Image content Toboggan user alighting from a toboggan to the left, horizontal line underneath, arrow pointing to the left
Hazard Hazards that do not allow alighting safely other than to the left-hand side	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Alighting from toboggan to the left	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M051
	Referent Alighting from toboggan to the right
	Function To signify that the user must alight from toboggan to the right
	Image content Toboggan user alighting from a toboggan to the right, horizontal line underneath, arrow pointing to the right
Hazard Hazards that do not allow alighting safely other than to the right-hand side	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Alighting from toboggan to the right	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M052
	Referent Keep distance between toboggans
	Function To signify that a distance must be kept between toboggans
	Image content Two seated human figures (left-hand profile), two toboggans above a sloping line, double-ended arrow between the toboggans
Hazard Toboggan colliding with other toboggans	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Ensuring enough space between toboggans to allow toboggans to stop in dangerous situations and prevent collisions	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	Reference No. ISO 7010-M053
	Referent Wear personal flotation device
	Function To signify that a personal flotation device (lifejacket) must be worn
	Image content Human figure (outlined) wearing personal flotation device (lifejacket)
Hazard Not using a personal flotation device can result in a person drowning	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing personal flotation device (lifejacket)	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

	Reference No. ISO 7010-M054
	Referent Keep children under supervision in the aquatic environment
	Function To signify that children must be kept under supervision in the aquatic environment
	Image content Upper part of large human figure, upper part of small human figure with raised arm, arrow, two wavy lines
Hazard Children being in water where they could get into difficulties	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Adults supervising children playing in water or swimming	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 — Description and application of referent for prohibition signs (category P)

	Reference No. ISO 7010-P001
	Referent General prohibition sign
	Function To signify a prohibited action
	Image content None
Hazard Risk to people specified by the supplementary sign	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not doing an action specified by the supplementary sign	
Additional information This safety sign cannot be used on its own and requires a supplementary sign to give further information about the action which is prohibited.	

Table 6 (continued)

	Reference No. ISO 7010-P002
	Referent No smoking
	Function To prohibit smoking
	Image content Cigarette (profile, outlined) with two wavy lines
Hazard Fire or explosion caused by lit cigarettes or other smoking materials or harm from the smoke	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not smoking	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P003
	Referent
	No open flame; Fire, open ignition source and smoking prohibited
	Function
	To prohibit smoking and all forms of open flame
	Image content
	Match (profile, outlined), flame
Hazard Fire or explosion caused by an open flame, open ignition source or smoking	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not having an open flame or open ignition source and not smoking	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P004
	Referent
	No thoroughfare
	Function
	To prohibit the use of a thoroughfare by pedestrians
	Image content
	Human figure walking (left hand)
Hazard Collision with vehicles or machinery Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using the thoroughfare Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P005
	Referent
	Not drinking water
	Function
	To prohibit drinking of unsuitable water
	Image content
	Tap above glass, two wavy lines
Hazard Water unsuitable for drinking Human behaviour that is intended to be caused after understanding the safety sign's meaning Not drinking the water Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P006
	Referent
	No access for forklift trucks and other industrial vehicles
	Function
	To prohibit the use of forklift trucks and other industrial vehicles
	Image content
	Forklift truck (left-hand profile) with human figure
Hazard Moving forklift trucks and other industrial vehicles	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using forklift trucks and other industrial vehicles	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P007
	Referent No access for people with active implanted cardiac devices
	Function To prohibit people with active implanted cardiac devices from entering a designated area
	Image content Heart shape and representation of pulse generator connected by curved line
Hazard Interference to the operation of or damage to active implanted cardiac devices from equipment generating strong electromagnetic fields	
Human behaviour that is intended to be caused after understanding the safety sign's meaning People with active implanted cardiac devices not entering a designated area	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P008
	Referent
	No metallic articles or watches
	Function
	To prohibit metallic articles or watches
	Image content
	Face and part of strap of an analogue wristwatch, flat side of a key
Hazard Strong magnetic fields Human behaviour that is intended to be caused after understanding the safety sign's meaning Removing or not wearing metallic articles or watches Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P009
	Referent
	No climbing
	Function
	To prohibit climbing
	Image content
	Human figure (rear view), six horizontal lines between two parallel vertical lines
Hazard Object unsafe to climb on and hazardous location/area	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not climbing	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P010
	Referent
	Do not touch
	Function
	To prohibit touching objects/parts of an object
	Image content
	Hand, horizontal line underneath
Hazard Dangerous surfaces	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not touching objects or parts of an object	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P011
	Referent
	Do not extinguish with water
	Function
	To prohibit using water to extinguish a fire
	Image content
	Bucket, area outlined by wavy line, flame
Hazard Dangerous reaction from the application of water to a burning substance	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using water to extinguish a fire	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P012
	Referent No heavy load
	Function To prohibit the placing of heavy objects on a surface
	Image content Weight resting on the two parts of a line which is broken in the centre so that the two halves are separated and each inclines downward
Hazard Breakage due to heavy load	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not placing any heavy objects on a surface	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. In spite of this, the following needs to be considered: "Heavy" depends on the context of use and if it needs to be specified, a supplementary sign should be added stating the maximum permissible load, for example as follows: max. 100 kg.	

Table 6 (continued)

	Reference No. ISO 7010-P013
	Referent No activated mobile phone
	Function To prohibit activated mobile phones
	Image content Mobile phone (front view), six curved lines
Hazard Electromagnetic field	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Turning the mobile phone off or not switching it on	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P014
	Referent
	No access for people with metallic implants
	Function
	To prohibit access of people with metallic implants
	Image content
	Hip joint and socket (outlined) joined by a black hip implant
Hazard Invisible rays causing a rise in temperature of a metallic implant	
Human behaviour that is intended to be caused after understanding the safety sign's meaning People with metallic implants not entering a designated area	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P015
	Referent
	No reaching in
	Function
	To prohibit people putting hands into openings
	Image content
	Hand between two converging lines
Hazard Injury to hands	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not putting hands into designated openings	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P016
	Referent Do not spray with water
	Function To prohibit spraying
	Image content Water hose with nozzle, five divergent lines of dots
Hazard Electric shock, chemical reaction, fire	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not spraying with water on machines and equipment or areas where chemical reactions can occur	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P017
	Referent No pushing
	Function To prohibit pushing against an object
	Image content Horizontal line and vertical block with human figure (right-hand profile) pushing against it
Hazard Objects overbalancing and falling	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not pushing an object	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P018
	Referent
	No sitting
	Function
	To prohibit sitting on a surface
	Image content
	Human figure (left-hand profile) in sitting position, horizontal line
Hazard Surface unsuitable to sit on	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not sitting on an unsuitable surface	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P019
	Referent
	No stepping on surface
	Function
	To prohibit stepping onto a surface
	Image content
	Human figure stepping up, line with right angle
Hazard Surface unsuitable for stepping onto	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not stepping onto an unsuitable surface	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P020
	Referent
	Do not use lift in the event of fire
	Function
	To prohibit use of lift in the event of fire
	Image content
	Outline of lift with two human figures standing inside and flames at the right-hand side of the lift
Hazard Being trapped in a lift during a fire Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using lift in the event of fire Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P021
	Referent
	No dogs
	Function
	To prohibit taking dogs into designated areas
	Image content
	Dog (right-hand profile)
Hazard Infections due to dogs; harming of people caused by dog bites	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not taking dogs into a designated area	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P022
	Referent No eating or drinking
	Function To prohibit eating and drinking
	Image content Three horizontal lines alongside a cup with straw
Hazard Ingestion of dangerous substances by food and drink contaminated at a designated area	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not eating or drinking in the designated area	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

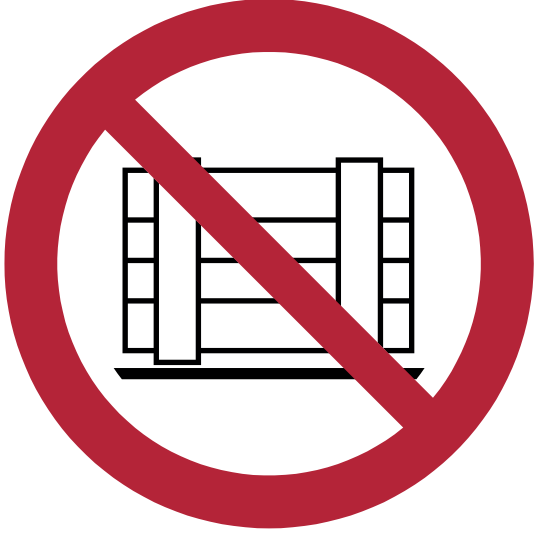
	Reference No. ISO 7010-P023
	Referent Do not obstruct
	Function To prohibit the obstruction of a designated clear area
	Image content Crate (outlined), horizontal line underneath
Hazard Obstruction in a designated clear area	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not placing an obstruction in a designated clear area (e.g. escape routes, emergency exits, passageways)	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P024
	Referent
	Do not walk or stand here
	Function
	To prohibit walking or standing on a designated area
	Image content
	Two footprints
Hazard Areas which are unsafe for people to walk or stand on	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Keeping off a designated area	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P025
	Referent
	Do not use this incomplete scaffold
	Function
	To prohibit the use of scaffolding systems which are not complete
	Image content
	Human figure (right-hand profile) walking on a broken horizontal bar surrounded by vertical and horizontal lines
Hazard Incomplete scaffold Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using an incomplete scaffold Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P026
	Referent Do not use this device in a bathtub, shower or water-filled reservoir
	Function To prohibit the use of unsuitable electrical equipment in or near water
	Image content Shower and bathtub
Hazard Electric shock	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using electrically powered equipment in bathtubs, showers or water-filled reservoirs	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P027
	Referent Do not use this lift for people
	Function To prohibit the use of the lift for the transportation of people
	Image content Human figure (front view) in a rectangle, short arrows above and underneath the rectangle
Hazard Goods or freight lifts without the safety features necessary for the transportation of people	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using the lift for the transportation of people	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P028
	Referent Do not wear gloves
	Function To prohibit the use of gloves when operating a machine with drawing-in hazard
	Image content Two gloves, one outlined, one filled
Hazard Drawing-in hazard to people wearing gloves while operating a machine	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Operating a machine with drawing-in hazard without wearing gloves	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P029
	Referent
	No photography
	Function
	To prohibit the taking of photographs
	Image content
	Camera
Hazard Distraction of drivers, operatives and people working, particularly in dark environments	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not taking photographs	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No. ISO 7010-P030
	Referent Do not tie knots in rope
	Function To prohibit tying knots in a climbing rope
	Image content Climbing rope with a knot
Hazard Knots in a climbing rope	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not tying any knots in a climbing rope	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P031
	Referent Do not alter the state of the switch
	Function To prohibit any change of the current energetic or mechanical state of a machine or equipment
	Image content Switch and two arrows
Hazard Change of the current energetic or mechanical state of a machine or equipment	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not switching	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P032
	Referent Do not use for face grinding
	Function To prohibit the use of the grinding disc for face grinding
	Image content Horizontal line with two thicknesses and an angled step; grinding machine at an angle to the line
Hazard Breakage of grinding disc due to overstressing leading to flying objects	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using the grinding disc for face grinding	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P033
	Referent Do not use for wet grinding
	Function To prohibit the use of the grinding disc for wet grinding
	Image content Horizontal line, two circles with random infilling of dots and outer circle touching line, tap with water drops
Hazard Breakage of grinding disc due to overstressing leading to flying objects	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using the grinding disc for wet grinding	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P034
	Referent
	Do not use with hand-held grinding machine
	Function
	To prohibit the use of the grinding disc with a hand-held grinding machine
	Image content
	Hand holding a grinding machine
Hazard Breakage of grinding disc due to overstressing leading to flying objects	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using the grinding disc with a hand-held grinding machine	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P035
	Referent Do not wear metal-studded footwear
	Function To prohibit the use of metal-studded footwear
	Image content End of leg, shoe with circles on sole
Hazard Lack of grip between metal-studded footwear and certain floor surface	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not wearing metal-studded footwear	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P036
	Referent
	No children allowed
	Function
	To prohibit children from entering a dangerous area
	Image content
	Small boy and larger girl
Hazard Areas dangerous to children Human behaviour that is intended to be caused after understanding the safety sign's meaning Children not entering a dangerous area Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

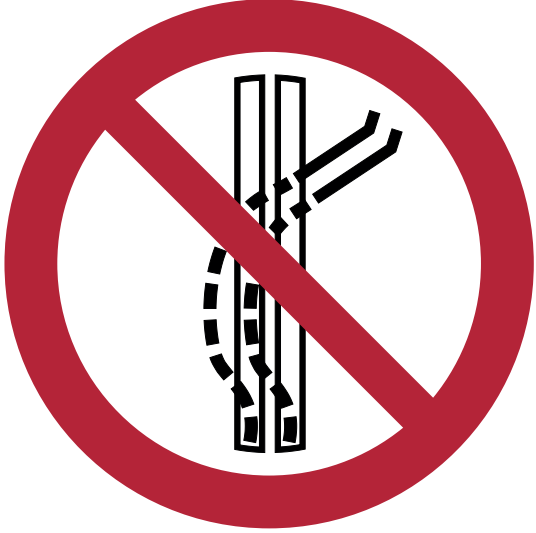
	Reference No. ISO 7010-P037
	Referent Do not leave the tow-track
	Function To prohibit leaving the tow-track
	Image content Two parallel curved dashed lines running across two straight outlined tracks
Hazard Uneven surface and line supporting structure outside the tow-track, following users of the tow-track	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not leaving the tow-track	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P038
	Referent
	Do not swing the chair
	Function
	To prohibit swinging the chair
	Image content
	Two human figures (right-hand profile) sitting in two chairs, line above, curved arrow with two arrow heads
Hazard Chair falling down	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not swinging the chair	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P039
	Referent Hot works prohibited
	Function To prohibit hot works
	Image content Hand (outlined) holding a tool, four lines of different lengths, each with a star at the end, fifth star, three parallel wavy lines
Hazard Fire, explosion	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not doing hot works	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P040
	Referent Do not set off fireworks
	Function To prohibit setting off fireworks
	Image content Fireworks, sparks
Hazard Fire or explosion caused by setting off fireworks	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not setting off fireworks	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P041
	Referent No leaning against
	Function To prohibit leaning against an object
	Image content Human figure (left-hand profile) leaning backwards against a vertical line
Hazard Object overbalancing and falling or person breaking through	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not leaning against an object	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P042
	Referent
	Not for pregnant women
	Function
	To prohibit pregnant women undertaking hazardous actions or activities
	Image content
	Standing pregnant female figure (right-hand profile)
Hazard Injury to the expectant mother or baby due to their lower tolerability to a particular situation Human behaviour that is intended to be caused after understanding the safety sign's meaning Not undertaking hazardous actions or activities Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. The graphical symbol is the mirrored (and slightly adapted) standardized and registered public information symbol ISO 7001-PI PF 059 "Priority access for expecting mothers".	

Table 6 (continued)

	Reference No. ISO 7010-P043
	Referent Not for people in the state of intoxication
	Function To prohibit intoxicated people undertaking hazardous actions or activities
	Image content Unbalanced human figure with a bottle in hand, whirls and bubbles around the figure's head
Hazard Injury to people in the state of intoxication due to their lower tolerability to a particular situation	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not undertaking hazardous actions or activities when in the state of intoxication	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P044
	Referent Use of smart glasses prohibited
	Function To prohibit using smart glasses
	Image content Conventional glasses (front perspective view) with a device for visual and multimedia data processing
Hazard Restricting people's field of view at work; distraction of drivers; mental stress/strain by unauthorized invasion of privacy	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using smart glasses	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P046
	Referent Do not stretch out of toboggan
	Function To prohibit stretching out of the toboggan
	Image content Seated human figure with both arms and legs outstretched, toboggan above horizontal line
Hazard Bumping or falling out caused by stretching out of the toboggan	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not stretching out of the toboggan	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P047
	Referent Do not ram into toboggans
	Function To prohibit ramming other toboggans
	Image content Two seated human figures (left-hand profile), two toboggans above sloping line, lines radiating from a point between the two toboggans
Hazard Toboggan colliding with other toboggans	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not ramming into toboggans	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P048
	Referent
	No running
	Function
	To prohibit running
	Image content
	Human figure (left-hand profile) running
Hazard Falling or colliding caused by running Human behaviour that is intended to be caused after understanding the safety sign's meaning No running Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No.
	ISO 7010-P049
	Referent
	No swimming
	Function
	To prohibit swimming
	Image content
	Human figure swimming, two wavy lines
Hazard Water conditions or environment hazardous to swimmers Human behaviour that is intended to be caused after understanding the safety sign's meaning No swimming Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No.
	ISO 7010-P050
	Referent
	No snorkelling
	Function
	To prohibit the use of snorkelling equipment
	Image content
	Human figure with snorkelling equipment, single wavy line
Hazard Snorkellers and their equipment being in an area where they could collide with other people or craft in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No snorkelling	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No.
	ISO 7010-P051
	Referent
	No sub-aqua diving
	Function
	To prohibit the use of sub-aqua equipment
	Image content
	Human figure with sub-aqua equipment, three dots, single wavy line
Hazard Sub-aqua divers and their equipment being in an area where they could collide with other people or craft in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No sub-aqua diving	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No.
	ISO 7010-P052
	Referent
	No diving
	Function
	To prohibit diving into the water
	Image content
	Human figure diving, two wavy lines
Hazard Divers being in an area where they could collide with other people or encounter other hazards in the water Human behaviour that is intended to be caused after understanding the safety sign's meaning No diving Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No. ISO 7010-P053
	Referent No sailing
	Function To prohibit sailing
	Image content Sailing boat, two wavy lines
Hazard Sailing boats being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No sailing	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No. ISO 7010-P054
	Referent No windsurfing
	Function To prohibit windsurfing
	Image content Human figure (left-hand profile), windsurfing board, two wavy lines
Hazard Windsurfing boards being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No windsurfing	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No. ISO 7010-P055
	Referent No manually powered craft
	Function To prohibit the use of manually powered craft (e.g. rowing, sculling, paddling, punting, pedalo)
	Image content Human figure (right-hand profile) sitting in rowing boat, oar, two wavy lines
Hazard Manually powered craft being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using manually powered craft	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No.
	ISO 7010-P056
	Referent
	No mechanically powered craft
	Function
	To prohibit the use of mechanically powered craft
	Image content
	Mechanically powered craft, two wavy lines
Hazard Mechanically powered craft being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using mechanically powered craft	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No. ISO 7010-P057
	Referent No personal water craft
	Function To prohibit the use of personal water craft (e.g. jet-ski)
	Image content Human figure (left-hand profile), personal water craft, two wavy lines
Hazard Personal water craft being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using personal water craft	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No. ISO 7010-P058
	Referent No towed water activity
	Function To prohibit towed water activity (e.g. water skiing, wakeboarding, doughnuts, banana craft)
	Image content Human figure (left-hand profile), water skis, tow rope, two wavy lines
Hazard Water skis, wakeboards, doughnuts, banana craft or tow ropes being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not carrying out towed water activity	
Additional information The tow rope needs to extend into the exclusion zone (as specified in ISO 3864-3) in order to convey clearly the image of a continuous tow rope extending outside the visual scene portrayed. Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No. ISO 7010-P059
	Referent No surf craft
	Function To prohibit the use of surf craft (e.g. surfboards, surf skis, surf kayaks)
	Image content Human figure (right-hand profile), surfboard, two wavy lines, three curved lines
Hazard Surf craft being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using surf craft	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No.
	ISO 7010-P060
	Referent
	No outdoor footwear
	Function
	To prohibit the wearing of outdoor footwear
	Image content
	Outdoor footwear
Hazard Slipping or falling or the spreading of contamination caused by the wearing of inappropriate footwear for the surface being walked upon Human behaviour that is intended to be caused after understanding the safety sign's meaning Not wearing outdoor footwear or ensuring that footwear is protected by overshoes Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No.
	ISO 7010-P061
	Referent
	No jumping into water
	Function
	To prohibit jumping into the water
	Image content
	Human figure with arms raised, jumping, filled segment, two wavy lines
Hazard Being struck by person jumping into the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No jumping into the water	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No.
	ISO 7010-P062
	Referent
	No pushing into water
	Function
	To prohibit pushing people into the water
	Image content
	Two human figures, one figure pushing the other figure, filled segment, two wavy lines
Hazard Being struck by the person pushed into the water Human behaviour that is intended to be caused after understanding the safety sign's meaning Not pushing people into the water Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P063
	Referent No body boarding
	Function To prohibit body boarding (or boogie boarding)
	Image content Human figure (right-hand profile), body board, two wavy lines
Hazard Body boards being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No body boarding	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P064
	Referent No surfing between the red-and-yellow flags
	Function To prohibit people using surf craft in designated swimming areas
	Image content Human figure (right-hand profile) on surfboard, two wavy lines, three curved lines, between two red-and-yellow rectangular shapes at the top of two vertical lines
Hazard Surf craft being in an area where they could collide with people in the water, between two red-and-yellow flags	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No surf craft in designated swimming areas	
Additional information It is essential for the flags to be shown in this particular safety sign in the colours in which they are always used on the beach (and specified in ISO 20712-2:2007 as flag BF.03) to ensure understanding of the safety message and avoid confusion with other flags. In these unique circumstances, the red and yellow colours of this element of the graphical symbol are shown, in addition to the normal contrast colour of black. Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No.
	ISO 7010-P065
	Referent
	No kite surfing
	Function
	To prohibit kite surfing
	Image content
	Human figure (right-hand profile) on surfboard, kite, two wavy lines, three curved lines
Hazard Kite surfers being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No kite surfing	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No.
	ISO 7010-P066
	Referent
	No parasailing
	Function
	To prohibit parasailing
	Image content
	Human figure with parasail, tow rope, mechanically powered craft, two wavy lines
Hazard Parasailors and mechanically powered craft being in an area where they could collide with people on or in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No parasailing	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No. ISO 7010-P067
	Referent No sand yachting
	Function To prohibit sand yachting
	Image content Sand yacht, sail, vertical line, horizontal line, two wheels
Hazard Sand yachts being in an area where they could collide with people on the beach	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No sand yachting	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	Reference No. ISO 7010-P068
	Referent Do not expose to direct sunlight or hot surface
	Function To prohibit exposure to direct sunlight or hot surface
	Image content Three parallel, vertical, s-shaped lines above a horizontal straight line and circle with radiating straight lines
Hazard Raised temperature due to direct sunlight or placement on hot surface can cause a harmful explosion	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not leaving the product exposed to direct sunlight or hot surface	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P069
	Referent Not to be serviced by users
	Function To prohibit carrying out servicing by users
	Image content Screwdriver, open ended wrench (spanner)
Hazard Injury by hazards not recognizable by users	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Unqualified users not carrying out servicing	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P070
	Referent Do not put finger into the nozzle of a hydromassage
	Function To prohibit putting a finger into the nozzle of a hydromassage
	Image content Hand with finger pointing into nozzle of water jet spray
Hazard Suction and entrapment of a single finger in the nozzle of a hydromassage, finger injuries, drowning in case of small children	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not putting finger into the nozzle of a hydromassage	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 — Description and application of referent for warning signs (category W)

	Reference No. ISO 7010-W001
	Referent General warning sign
	Function To signify a general warning
	Image content Exclamation mark
Hazard Risk to people specified by the supplementary sign	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care regarding the hazard specified by the supplementary sign	
Additional information This safety sign cannot be used on its own and requires a supplementary sign to give further information about the hazard.	

Table 7 (continued)

	Reference No.
	ISO 7010-W002
	Referent
	Warning; Explosive material
	Function
	To warn of explosive materials
	Image content
	Part of filled circle with radiating triangular lines and irregular shapes
Hazard Explosion	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when in the vicinity of or handling explosive materials	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	Reference No.
	ISO 7010-W003
	Referent
	Warning; Radioactive material or ionizing radiation
	Function
	To warn of radioactive materials or ionizing radiation
	Image content
	Circle with three circular sectors around it
Hazard Radioactivity and ionizing radiation Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid exposure to radioactive material or ionizing radiation Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

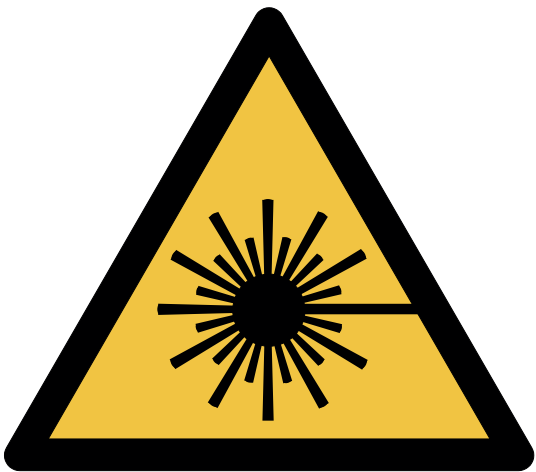
	Reference No. ISO 7010-W004
	Referent Warning; Laser beam
	Function To warn of a laser beam
	Image content Circle with 24 regular equally spaced radiating lines, 12 shorter of equal length, 11 longer of equal length and one longer reaching horizontally the right-hand side of the triangle
Hazard Laser beam	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid exposure to a laser beam	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	Reference No. ISO 7010-W005
	Referent Warning; Non-ionizing radiation
	Function To warn of non-ionizing radiation
	Image content Circle with three arc-shaped lines of increasing length on each side symmetrically located, with a trapezoid underneath
Hazard Non-ionizing radiation	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid exposure to non-ionizing radiation	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	Reference No. ISO 7010-W006
	Referent Warning; Magnetic field
	Function To warn of a magnetic field
	Image content Hoop with two outlined sections at the bottom, two arc-shaped lines on each side of the outlined section
Hazard Strong magnetic field	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid exposure to a strong magnetic field	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	Reference No.
	ISO 7010-W007
	Referent
	Warning; Floor-level obstacle
	Function
	To warn of a floor-level obstacle
	Image content
	Human figure falling forwards, thick horizontal line by forward leg
Hazard Floor-level obstacle	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when in the vicinity of a floor-level obstacle	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	Reference No.
	ISO 7010-W008
	Referent
	Warning; Drop (fall)
	Function
	To warn of a drop
	Image content
	Human figure falling backwards from the edge of a surface
Hazard Drop	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when in the vicinity of a drop	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	