
**Rolling bearings — Needle roller bearing
track rollers — Boundary dimensions and
tolerances**

*Roulements — Roulements à aiguilles, galets de came — Dimensions
d'encombrement et tolérances*

STANDARDSISO.COM : Click to view the full PDF of ISO 7063:2003



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 7063:2003

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7063 was prepared by Technical Committee ISO/TC 4, *Rolling bearings*, Subcommittee SC 5, *Needle roller bearings*.

This second edition cancels and replaces the first edition (ISO 7063:1982), which has been technically revised, as well as ISO 6278:1980, which has been withdrawn.

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 7063:2003

Rolling bearings — Needle roller bearing track rollers — Boundary dimensions and tolerances

1 Scope

This International Standard specifies the boundary dimensions and the tolerances of needle roller bearing track rollers, yoke and stud types.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1132-1:2000, *Rolling bearings — Tolerances — Part 1: Terms and definitions*

ISO 5593:1997, *Rolling bearings — Vocabulary*

ISO 15241:2001, *Rolling bearings — Symbols for quantities*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1132-1 and ISO 5593 apply.

4 Symbols

For the purposes of this document, the symbols listed in ISO 15241 and the following apply.

The symbols (except those for tolerances) shown in Figures 1 and 2, and the values given in Tables 1 to 8 denote nominal dimensions unless specified otherwise.

B	overall width of inner ring and side washers of yoke-type track roller
B_1	distance from face of stud to face of side washer of stud-type track roller
B_2	length of shank on stud
B_3	distance from face of side washer to centre of radial lubrication hole
C	outer ring width
C_1	distance from face of outer ring to face of side washer
D	outside diameter of outer ring
d	bore diameter
d_1	stud diameter
G	designation of thread on stud

K_{ea}	radial runout of outer ring of assembled track roller
l_G	length of thread on stud
r	chamfer dimension of outer ring, radial and axial
$r_{s \min}$	smallest single chamfer dimension on outer ring
r_1	chamfer dimension of inner ring, radial and axial
$r_{1s \min}$	smallest single chamfer dimension on inner ring
Δ_{Bs}	deviation of a single overall width of inner ring and side washers
Δ_{B2s}	deviation of a single shank length
Δ_{Cs}	deviation of a single outer ring width
Δ_{Dmp}	deviation of mean outside diameter in a single plane
Δ_{dmp}	deviation of mean bore diameter in a single plane
Δ_{d1s}	deviation of a single stud diameter

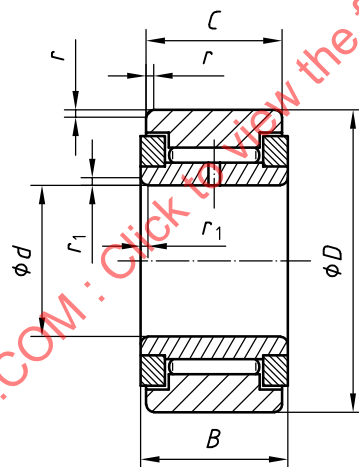


Figure 1 — Yoke-type

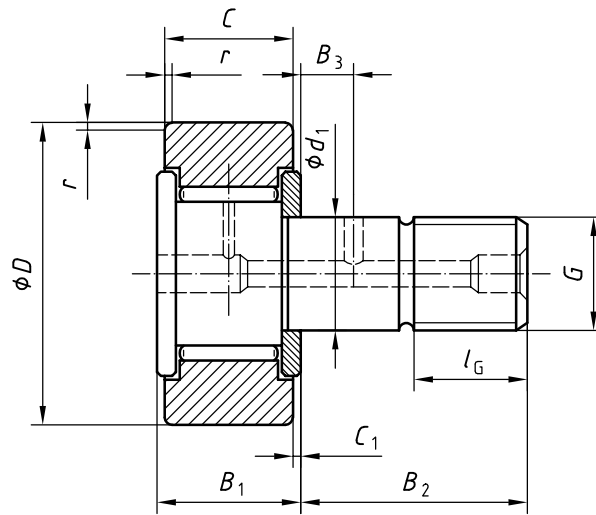


Figure 2 — Stud-type

5 Boundary dimensions

5.1 Track rollers — Yoke-type

Boundary dimensions for the yoke-type are given in Tables 1 and 2.

NOTE The track rollers may be manufactured with or without a cage and with or without seals.

Table 1 — Track rollers — Yoke-type — Light series

Dimensions in millimetres

D^a	d	B	C	$r_{s \min}^b$	$r_{1s \min}^{b, c}$
16	5	12	11	0,15	0,15
19	6	12	11	0,15	0,15
24	8	15	14	0,3	0,3
30	10	15	14	0,6	0,3
32	12	15	14	0,6	0,3
35	15	19	18	0,6	0,3
40	17	21	20	1	0,3
47	20	25	24	1	0,3
52	25	25	24	1	0,3
62	30	29	28	1	0,3
72	35	29	28	1	0,6
80	40	32	30	1	0,6
85	45	32	30	1	0,6
90	50	32	30	1	0,6

^a The outside surface may be cylindrical or crowned.

^b No maximum value is specified for chamfer dimensions r and r_1 .

^c A circumferential counter bore may be provided as an alternative to the chamfer on the inner ring.

Table 2 — Track rollers — Yoke-type — Heavy series

Dimensions in millimetres

D^a	d	B	C	$r_{s \min}^b$	$r_{1s \min}^{b, c}$
32	10	18	17	0,6	0,3
37	12	21	20	1	0,3
42	15	24	22	1	0,3
47	17	27	25	1	0,3
58	20	34	32	1	0,3
72	25	40	38	1	0,3
85	30	48	46	1,5	0,3
100	35	56	54	1,5	0,6
110	40	63	61	2	0,6
125	45	71	69	2	0,6
140	50	80	76	2,5	0,6
160	60	90	86	2,5	0,6
190	70	103	99	2,5	0,6
210	80	115	111	2,5	1
240	90	132	128	3	1

^a The outside surface may be cylindrical or crowned.

^b No maximum value is specified for chamfer dimensions r and r_1 .

^c A circumferential counter bore may be provided as an alternative to the chamfer on the inner ring.

5.2 Track rollers — Stud-type

Boundary dimensions for the stud-type are given in Tables 3 and 4.

NOTE The track rollers may be manufactured with or without a cage and with or without seals. The provision of an axial hole for lubrication in the threaded end of the stud is optional. A radial hole in the shank of the stud is also optional, but where such provision is made for lubrication purposes dimension B_3 applies. Lubrication hole diameters are not specified.

Table 3 — Track rollers — Stud-type — Light series

Dimensions in millimetres									
D^a	d_1	C	G	l_G	B_1 max.	B_2	B_3	C_1	$r_{s\ min}^b$
13	5	9	M5 × 0,8	7	10	13	—	0,5	0,15
16	6	11	M6 × 1	8	12,2	16	—	0,6	0,15
19	8	11	M8 × 1,25	10	12,2	20	—	0,6	0,15
22	10	12	M10 × 1 ^c	12	13,2	23	—	0,6	0,3
26	10	12	M10 × 1 ^c	12	13,2	23	—	0,6	0,3
30	12	14	M12 × 1,5	13	15,2	25	6	0,6	0,6
32	12	14	M12 × 1,5	13	15,2	25	6	0,6	0,6
35	16	18	M16 × 1,5	17	19,6	32,5	8	0,8	0,6
40	18	20	M18 × 1,5	19	21,6	36,5	8	0,8	1
47	20	24	M20 × 1,5	21	25,6	40,5	9	0,8	1
52	20	24	M20 × 1,5	21	25,6	40,5	9	0,8	1
62	24	29	M24 × 1,5	25	30,6	49,5	11	0,8	1
72	24	29	M24 × 1,5	25	30,6	49,5	11	0,8	1
80	30	35	M30 × 1,5	32	37	63	15	1	1
85	30	35	M30 × 1,5	32	37	63	15	1	1
90	30	35	M30 × 1,5	32	37	63	15	1	1

^a The outside surface may be cylindrical or crowned.

^b No maximum value is specified for chamfer dimension r .

^c These track rollers are also manufactured with M10 × 1,25.

Table 4 — Track rollers — Stud-type — Heavy series

Dimensions in millimetres

D^a	d_1	C	G	l_G	B_1 max.	B_2	B_3	C_1	$r_s \text{ min}^b$
13	6	9	M6 × 1	8	10	15	—	0,5	0,3
16	8	11	M8 × 1,25	10	12	19	—	0,5	0,3
19	10	11	M10 × 1 ^c	12	12	22	—	0,5	0,3
24	12	14	M12 × 1,5	14	15	26	—	0,5	0,3
32	14	17	M14 × 1,5	16	18	30	7	0,5	0,6
37	16	20	M16 × 1,5	18	21	35	8	0,5	1
42	20	22	M20 × 1,5	21	24	41	10	1	1
47	24	25	M24 × 1,5	25	27	48	11	1	1
58	30	32	M30 × 1,5	30	34	59	14	1	1
72	36	38	M36 × 3	41	40	76	17	1	1
85	42	46	M42 × 3	46	48	87	20	1	1,5
100	48	54	M48 × 3	53	56	100	23	1	1,5
110	56	61	M56 × 4	61	63	115	—	1	2
125	64	69	M64 × 4	68	71	129	—	1	2
140	72	76	M72 × 4	73	79	143	—	2	2,5
160	80	86	M80 × 4	80	89	157	—	2	2,5
190	80	99	M80 × 4	80	102	160	—	2	2,5
210	90	111	M90 × 4	88	114	178	—	2	2,5
240	100	128	M100 × 4	96	131	197	—	2	3

^a The outside surface may be cylindrical or crowned.^b No maximum value is specified for chamfer dimension r_s .^c These track rollers are also manufactured with M10 × 1,25.

6 Tolerances

6.1 Track rollers - Yoke-type

Tolerances for yoke-type are given in Tables 5 and 6.

Table 5 — Outer ring

Tolerance values in micrometres

D mm		Δ_{Dmp}				Δ_{Cs}		K_{ea}
		Outside surface						
		cylindrical		crowned		high	low	
>	$\leq$	high	low	high	low	high	low	
10	30	0	-21	0	-50	0	-120	15
30	50	0	-25	0	-50	0	-120	20
50	80	0	-30	0	-50	0	-120	25
80	120	0	-35	0	-50	0	-120	35
120	150	0	-40	0	-50	0	-120	40
150	180	0	-40	0	-50	0	-150	45
180	240	0	-46	0	-50	0	-200	50

Table 6 — Inner ring

Tolerance values in micrometres

d mm		Δ_{dmp}		Δ_{Bs}	
>	$\leq$	high	low	high	low
2,5	10	0	-8	0	-270
10	18	0	-8	0	-330
18	30	0	-10	0	-390
30	50	0	-12	0	-460
50	80	0	-15	0	-540
80	120	0	-20	0	-630