

International Standard



7264

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Cross-country skis — Dimensions of the binding mounting area for toe clip bindings

Ski de fond — Dimensions de la zone de montage pour les fixations avec étrier

First edition — 1983-09-15

STANDARDSISO.COM : Click to view the full PDF of ISO 7264:1983

UDC 685.363.2

Ref. No. ISO 7264-1983 (E)

Descriptors : sports equipment, cross-country skis, geometric characteristics, dimensions, specifications.

Price based on 3 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been authorized has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 7264 was developed by Technical Committee ISO/TC 83, *Sports and recreational equipment*, and was circulated to the member bodies in January 1982.

It has been approved by the member bodies of the following countries :

Austria	Italy	Switzerland
Egypt, Arab Rep. of	New Zealand	USA
France	Poland	USSR
Germany, F.R.	South Africa, Rep. of	
India	Sweden	

No member body expressed disapproval of the document on technical grounds.

Cross-country skis — Dimensions of the binding mounting area for toe clip bindings

0 Introduction

Standardized dimensions for a binding mounting area enable a ski designer to locate reinforcing elements within this area. Standard dimensions also enable the binding designer to determine all interface dimensions for binding unit size, screw locations, etc. Bindings and skis built in compliance with this International Standard are compatible.

1 Scope and field of application

This International Standard defines the binding mounting area of cross-country skis within which parts of the toe clip binding according to ISO 6960 may be mounted.

It is applicable to all cross-country skis divided in two groups of sizes:

- group 1: from 130 cm to 175 cm, and
- group 2: from 180 cm to 220 cm.

It specifically excludes alpine skis. It also excludes skis intended for use with cable bindings.

2 References

ISO 6960, *Cross-country ski bindings with 3 pins — Dimensions, interface and design*.

ISO 7138, *Cross-country skis — Determination of mass and location of balance point*.¹⁾

3 Definitions

3.1 binding mounting area, A_1 : Portion of the top surface of the ski which is intended for mounting toe clip bindings. The standardized binding mounting area establishes the area on the ski within which the entire diameter of binding screws should be placed. A_1 is located symmetrically to the binding mounting point MP or, in the case of a scale, to the centre line of the scale (see figure 1).

3.2 binding mounting area, A_2 : Portion of the top surface of the ski intended for mounting other parts of a toe clip binding such as heel support plates. This is the area on the ski within which the entire diameter of the part attachment fasteners should be placed (see figure 1).

3.3 thickness of the binding mounting area : Thickness of areas A_1 and A_2 provided for mounting screws.

3.4 curvature, h_{Cl} : Deviation from a flat profile along the length of the mounting area, A_1 , measured from a straight line passing through the end points of the binding mounting area (R and F) on the surface of the ski with the ski base pressed against a flat surface (see figure 1).

3.5 convexity, h_{Cb} : Deviation from a flat profile, perpendicular to the longitudinal axis, measured between lines parallel to the base surface and passing through the highest and lowest points of the mounting area A_1 (see figure 2).

3.6 mounting point, MP : Location on the ski for placing the mounting jig.

1) At present at the stage of draft.

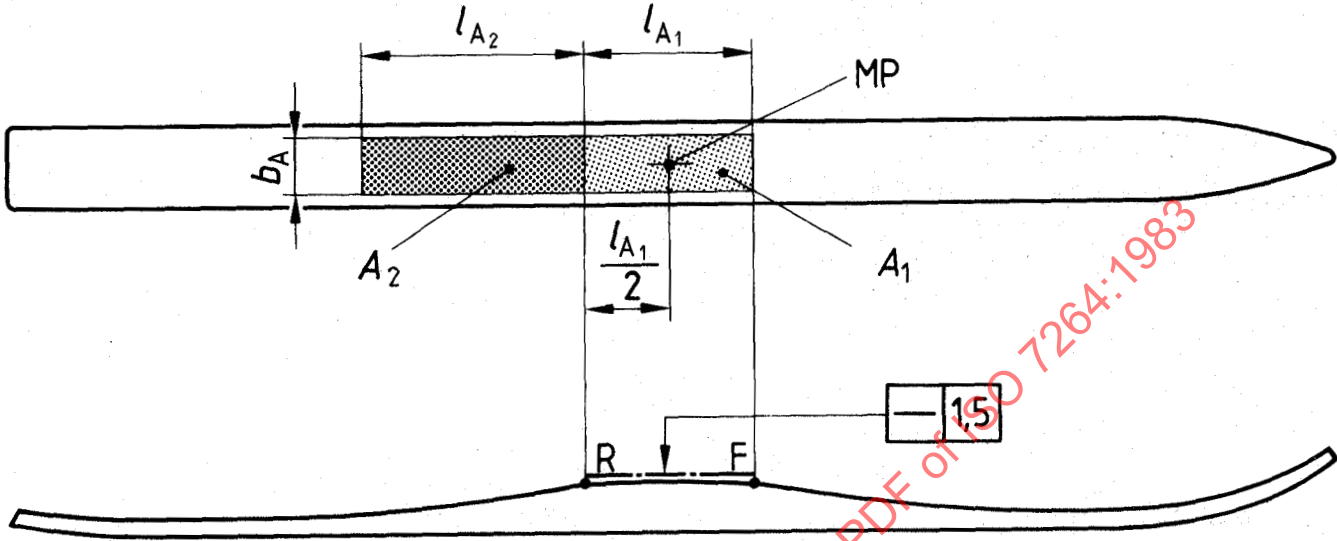


Figure 1 — Symbols (related to length and width of the binding mounting area) and curvature

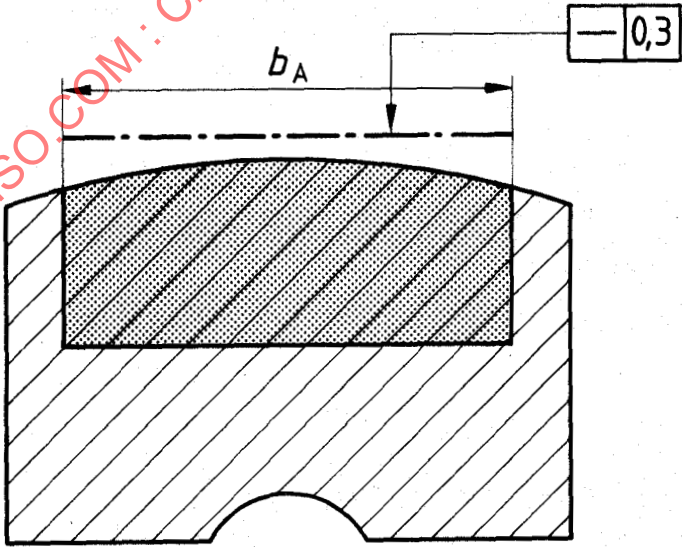


Figure 2 — Convexity