

International Standard



7721

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Countersunk head screws — Head configuration and gauging

Vis à tête fraisée — Configuration de la tête et vérification par calibre

First edition — 1983-09-15

STANDARDSISO.COM : Click to view the full PDF of ISO 7721:1983

UDC 621.88.091.6

Ref. No. ISO 7721-1983 (E)

Descriptors : fasteners, screws, countersunk head screws, dimensions.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been authorized has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 7721 was developed by Technical Committee ISO/TC 2, *Fasteners*, and was circulated to the member bodies in December 1981.

It has been approved by the member bodies of the following countries:

Australia	Germany, F.R.	New Zealand
Austria	Hungary	Norway
Belgium	India	Poland
Canada	Ireland	Romania
China	Italy	South Africa, Rep. of
Czechoslovakia	Japan	Spain
Denmark	Korea, Dem. P. Rep. of	Sri Lanka
Egypt, Arab Rep. of	Korea, Rep. of	Sweden
Finland	Mexico	Switzerland
France	Netherlands	USA

The member body of the following country expressed disapproval of the document on technical grounds:

United Kingdom

Countersunk head screws — Head configuration and gauging

1 Scope and field of application

This International Standard specifies the characteristics of head configurations of slotted and recessed countersunk head screws, and recommends a gauging method for the head dimensions laid down in the respective product standards.

2 Head configuration

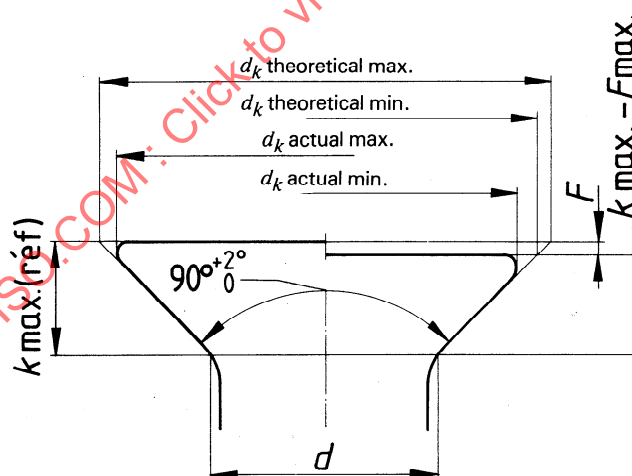
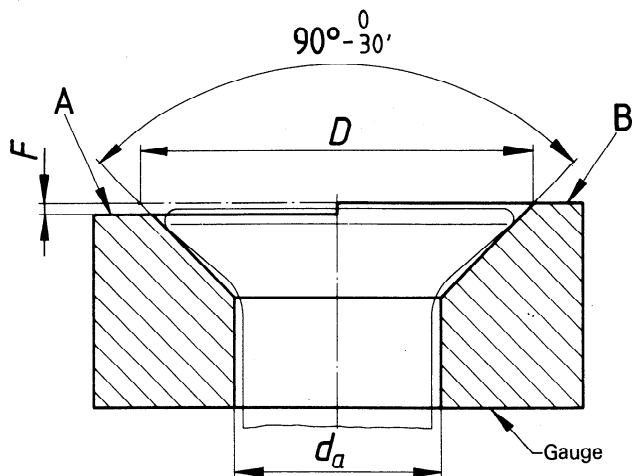


Table 1

Dimensions in millimetres

Thread size, d	metric	M 1.6	M 2	M 2.5	M 3	M 3.5	M 4	M 5	—	M 6	M 8	M 10	M 12	M 14	M 16	M 18	M 20	
	tapping	—	ST 2,2	—	ST 2,9	ST 3,5	ST 4,2	ST 4,8	ST 5,5	ST 6,3	ST 8	ST 9,5	—	—	—	—	—	
d_k	theoretical	max.	3,6	4,4	5,5	6,3	8,2	9,4	10,4	11,5	12,6	17,3	20	24	28	32	36	40
		min.	3,3	4,1	5,1	5,9	7,7	8,9	9,8	10,9	11,9	16,5	19,2	23,1	27	30,8	34,7	38,5
	actual	max.	3	3,8	4,7	5,5	7,3	8,4	9,3	10,3	11,3	15,8	18,3	22	25,5	29	32,5	36
		min.	2,7	3,5	4,4	5,2	6,9	8	8,9	9,9	10,9	15,4	17,8	21,5	25	28,5	31,9	35,4
F	max.	0,15	0,15	0,2	0,2	0,25	0,25	0,3	0,3	0,35	0,4	0,4	0,45	0,5	0,6	0,65	0,75	
k max. (ref.)	metric	1	1,2	1,5	1,65	2,35	2,7	2,7	—	3,3	4,65	5	6	7	8	9	10	
	tapping	—	1,1	—	1,7	2,35	2,6	2,8	3	3,15	4,65	5,25	—	—	—	—	—	

3 Gauging method

Flushness gauge
for the head height

The top surface of the screw head must lie between gauge surfaces A and B.


Ring gauge
No go gauge for d_k actual min.

Table 2:

Dimensions in millimetres

Thread size, d	metric	M 1,6	M 2	M 2,5	M 3	M 3,5	M 4	M 5	—	M 6	M 8	M 10
	tapping	—	ST 2,2	—	ST 2,9	ST 3,5	ST 4,2	ST 4,8	ST 5,5	ST 6,3	ST 8	ST 9,5
D	max.	3,6	4,4	5,5	6,3	8,2	9,4	10,4	11,5	12,6	17,3	20
	min.	3,55	4,35	5,45	6,25	8,15	9,35	10,35	11,45	12,55	17,25	19,95
d_a	max.	1,84	2,36	2,74	3,3	3,9	4,4	5,5	5,68	6,6	8,54	10,62
	min.	1,74	2,26	2,64	3,2	3,8	4,3	5,4	5,58	6,5	8,44	10,52
F	max.	0,15	0,15	0,2	0,2	0,25	0,25	0,3	0,3	0,35	0,4	0,4
	min.	0,14	0,14	0,19	0,19	0,24	0,24	0,29	0,29	0,34	0,39	0,39
d_h	min.	2,68	3,48	4,38	5,18	6,88	7,98	8,88	9,88	10,88	15,38	17,78
	max.	2,7	3,5	4,4	5,2	6,9	8	8,9	9,9	10,9	15,4	17,8

NOTE — Diameters d_a min. are based on fillet radius $r = 0,25 d$ for metric screws and $0,4 d$ for tapping screws.

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 7721:1983