
**Spring-type straight pins — Slotted,
heavy duty**

Goupilles cylindriques creuses, dites goupilles élastiques — Série épaisse

STANDARDSISO.COM : Click to view the full PDF of ISO 8752:2009



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 8752:2009



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 8752 was prepared by Technical Committee ISO/TC 2, *Fasteners*, Subcommittee SC 10, *Product standards for fasteners*.

This third edition cancels and replaces the second edition (ISO 8752:1997), which has been technically revised.

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 8752:2009

Spring-type straight pins — Slotted, heavy duty

1 Scope

This International Standard specifies the characteristics of slotted spring-type straight pins, made of steel or of austenitic or martensitic stainless steel, heavy duty, with nominal diameter, d_1 , from 1 mm to 50 mm inclusive.

NOTE The nominal diameters have been chosen in such a way that pins can be fitted one into the other or combined with pins, light duty, in accordance with ISO 13337.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3269, *Fasteners — Acceptance inspection*


ISO 4042, *Fasteners — Electroplated coatings*

ISO 6507-1, *Metallic materials — Vickers hardness test — Part 1: Test method*

ISO 8749, *Pins and grooved pins — Shear test*

3 Dimensions

See Figure 1 and Table 1.

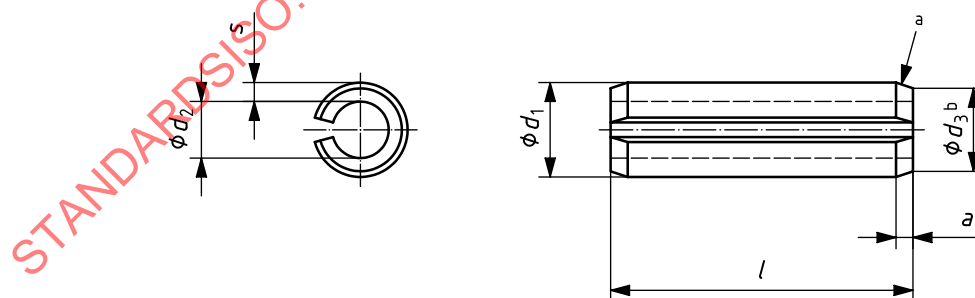

^a For slotted spring-type straight pins with a nominal diameter $d_1 \geq 10$ mm, a single chamfer configuration is optional at the discretion of the supplier.

^b $d_3 < d_{1, \text{nom}}$

NOTE For non-interlocking slotted spring-type straight pins (slot type N), see Clauses 5 and 6.

Figure 1 — Slotted spring-type straight pins, heavy duty

Table 1 — Dimensions

d_1	before mounting	nom.	1	1,5	2	2,5	3	3,5	4	4,5	5	6	8	10
		max.	1,3	1,8	2,4	2,9	3,5	4,0	4,6	5,1	5,6	6,7	8,8	10,8
		min.	1,2	1,7	2,3	2,8	3,3	3,8	4,4	4,9	5,4	6,4	8,5	10,5
d_2	before mounting ^a		0,8	1,1	1,5	1,8	2,1	2,3	2,8	2,9	3,4	4,0	5,5	6,5
a	max.		0,35	0,45	0,55	0,6	0,7	0,8	0,85	1,0	1,1	1,4	2,0	2,4
	min.		0,15	0,25	0,35	0,4	0,5	0,6	0,65	0,8	0,9	1,2	1,6	2,0
s			0,2	0,3	0,4	0,5	0,6	0,75	0,8	1,0	1,0	1,2	1,5	2,0
Minimum shear strength, double ^b kN			0,7	1,58	2,82	4,38	6,32	9,06	11,24	15,36	17,54	26,04	42,76	70,16
l^c														
nom.	min.	max.												
4	3,75	4,25												
5	4,75	5,25												
6	5,75	6,25												
8	7,75	8,25												
10	9,75	10,25												
12	11,5	12,5												
14	13,5	14,5												
16	15,5	16,5												
18	17,5	18,5												
20	19,5	20,5												
22	21,5	22,5												
24	23,5	24,5												
26	25,5	26,5												
28	27,5	28,5												
30	29,5	30,5												
32	31,5	32,5												
35	34,5	35,5												
40	39,5	40,5												
45	44,5	45,5												
50	49,5	50,5												
55	54,25	55,75												
60	59,25	60,75												
65	64,25	65,75												
70	69,25	70,75												
75	74,25	75,75												
80	79,25	80,75												
85	84,25	85,75												
90	89,25	90,75												
95	94,25	95,75												
100	99,25	100,75												
120	119,25	120,75												
140	139,25	140,75												
160	159,25	160,75												
180	179,25	180,75												
200	199,25	200,75												

^a For reference only.^b Applies to steel and martensitic corrosion resistant steel products only. For austenitic stainless pins, no double shear strength values are specified.^c For nominal lengths above 200 mm, steps of 20 mm.

Dimensions in millimetres

	12	13	14	16	18	20	21	25	28	30	32	35	38	40	45	50
	12,8	13,8	14,8	16,8	18,9	20,9	21,9	25,9	28,9	30,9	32,9	35,9	38,9	40,9	45,9	50,9
	12,5	13,5	14,5	16,5	18,5	20,5	21,5	25,5	28,5	30,5	32,5	35,5	38,5	40,5	45,5	50,5
	7,5	8,5	8,5	10,5	11,5	12,5	13,5	15,5	17,5	18,5	20,5	21,5	23,5	25,5	28,5	31,5
	2,4	2,4	2,4	2,4	2,4	3,4	3,4	3,4	3,4	3,4	3,6	3,6	4,6	4,6	4,6	4,6
	2,0	2,0	2,0	2,0	2,0	3,0	3,0	3,0	3,0	3,0	3,0	3,0	4,0	4,0	4,0	4,0
	2,5	2,5	3,0	3,0	3,5	4,0	4,0	5,0	5,5	6,0	6,0	7,0	7,5	7,5	8,5	9,5
	104,1	115,1	144,7	171	222,5	280,6	298,2	438,5	542,6	631,4	684	859	1 003	1 068	1 360	1 685

commercial

lengths

4 Application

The diameter of the hole into which the spring pin is to be inserted shall be equal to the nominal diameter, d_1 , of the mating pin and to tolerance class H12.

When mounted in the smallest permitted hole, the slot shall not fully close.

5 Requirements and reference International Standards

See Table 2.

Table 2 — Requirements and reference International Standards

Material ^a		Steel	Austenitic stainless steel	Martensitic stainless steel
		St	A	C
		Steel (St) at the supplier's discretion, either: Plain carbon steel with C ≥ 0,65 % Mn ≥ 0,5 % (check analysis) Hardened and tempered to a Vickers hardness of 420 HV to 520 HV or austempered to a Vickers hardness of 500 HV to 560 HV. or Silicon manganese steel with C ≥ 0,5 % Si ≥ 1,5 % Mn ≥ 0,7 % (check analysis) Hardened and tempered to a Vickers hardness of 420 HV to 560 HV. Hardness testing in accordance with ISO 6507-1.	Chemical composition limits (check analysis) % C ≤ 0,15 Mn ≤ 2,00 Si ≤ 1,50 Cr 16 to 20 Ni 6 to 12 P ≤ 0,045 S ≤ 0,03 Mo ≤ 0,8 Cold worked	C ≥ 0,15 Mn ≤ 1,00 Si ≤ 1,00 Cr 11,5 to 14 Ni ≤ 1,00 P ≤ 0,04 S ≤ 0,03 Hardened and tempered to a Vickers hardness of 440 HV to 560 HV Hardness testing in accordance with ISO 6507-1
Slot	Normal case	Form and width of slot at the discretion of the supplier.		
	Type N	Non-interlocking pins with a form and/or width of slot which guarantees no interlocking may be supplied by special agreement between the customer and supplier.		
Surface finish		Plain, i.e. pins to be supplied in natural finish, treated with a protective lubricant, unless otherwise specified by agreement between the customer and the supplier. If pins are surface coated, appropriate plating or coating processes should be employed to avoid hydrogen embrittlement. Due to the risk of hydrogen embrittlement, pins should not be electroplated or phosphate-coated. If electroplating or phosphate coating is required for corrosion prevention, by agreement between the customer and the supplier, it is mandatory that the pins be baked immediately after plating to minimize the risk of hydrogen embrittlement; see also information on hydrogen embrittlement relief in ISO 4042. Nevertheless, freedom from hydrogen embrittlement is not absolutely guaranteed. All tolerances shall apply prior to the application of a plating or coating.	Plain, i. e. pins to be supplied in natural finish.	
Workmanship		Pins shall be free of irregularities or detrimental defects. No burrs shall appear on any part of the pin.		
Shear strength test		The test shall be in accordance with ISO 8749.		
Acceptability		The acceptance procedure is specified in ISO 3269.		
^a For other materials, as agreed between the customer and supplier.				

6 Designation

EXAMPLE 1 A slotted spring-type straight pin, heavy duty, with nominal diameter $d_1 = 6$ mm and nominal length $l = 30$ mm, made of steel (St), is designated as follows:

Spring pin ISO 8752-6 × 30-St

EXAMPLE 2 A non-interlocking slotted spring-type straight pin (N), heavy duty, with nominal diameter $d_1 = 6$ mm and nominal length $l = 30$ mm, made of martensitic stainless steel (C), is designated as follows:

Spring pin ISO 8752-6 × 30-N-C

STANDARDSISO.COM : Click to view the full PDF of ISO 8752:2009