

INTERNATIONAL STANDARD

20
**ISO
9156**

First edition
1989-11-01

**Aerospace — Nuts, anchor, self-locking, fixed,
90° corner, reduced series, with counterbore,
with MJ threads, coated or uncoated,
classification 1 100 MPa/235 °C,
1 100 MPa/315 °C or 1 100 MPa/425 °C —
Dimensions**

*Aéronautique et espace — Écrous à river, à freinage interne, à filetage MJ, fixes,
d'angle 90°, série réduite, avec chambrage, revêtus ou non revêtus, de classification
1 100 MPa/235 °C, 1 100 MPa/315 °C ou 1 100 MPa/425 °C — Dimensions*



Reference number
ISO 9156 : 1989 (E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 9156 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*.

Users should note that all International Standards undergo revision from time to time and that any reference made herein to any other International Standard implies its latest edition, unless otherwise stated.

© ISO 1989

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization

Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Aerospace — Nuts, anchor, self-locking, fixed, 90° corner, reduced series, with counterbore, with MJ threads, coated or uncoated, classification 1 100 MPa/235 °C, 1 100 MPa/315 °C or 1 100 MPa/425 °C — Dimensions

0 Introduction

The dimensions laid down in this International Standard have been specified so as to satisfy the requirements laid down in ISO 5858.

1 Scope

This International Standard lays down the dimensions for reduced series, fixed, 90° corner, counterbored anchor nuts, with MJ threads, coated or uncoated, with a self-locking feature achieved by forming the upper portion out-of-round and with a classification of

- 1 100 MPa/2535 °C; or
- 1 100 MPa/315 °C; or
- 1 100 MPa/425 °C.

2 Field of application

This International Standard is intended solely for the drawing up of product standards appropriate for aerospace use.

3 References

ISO 5855-2, *Aerospace construction — MJ threads — Part 2: Limit dimensions for bolts and nuts.*

ISO 5858, *Aerospace — Self-locking nuts with maximum operating temperature less than or equal to 425 °C — Procurement specification.*¹⁾

ISO 8788, *Aerospace — Fasteners — Tolerances of form and position for nuts.*

1) At present at the stage of draft.

4 Configuration and dimensions

See the figure and the table. Dimensions are expressed in millimetres.

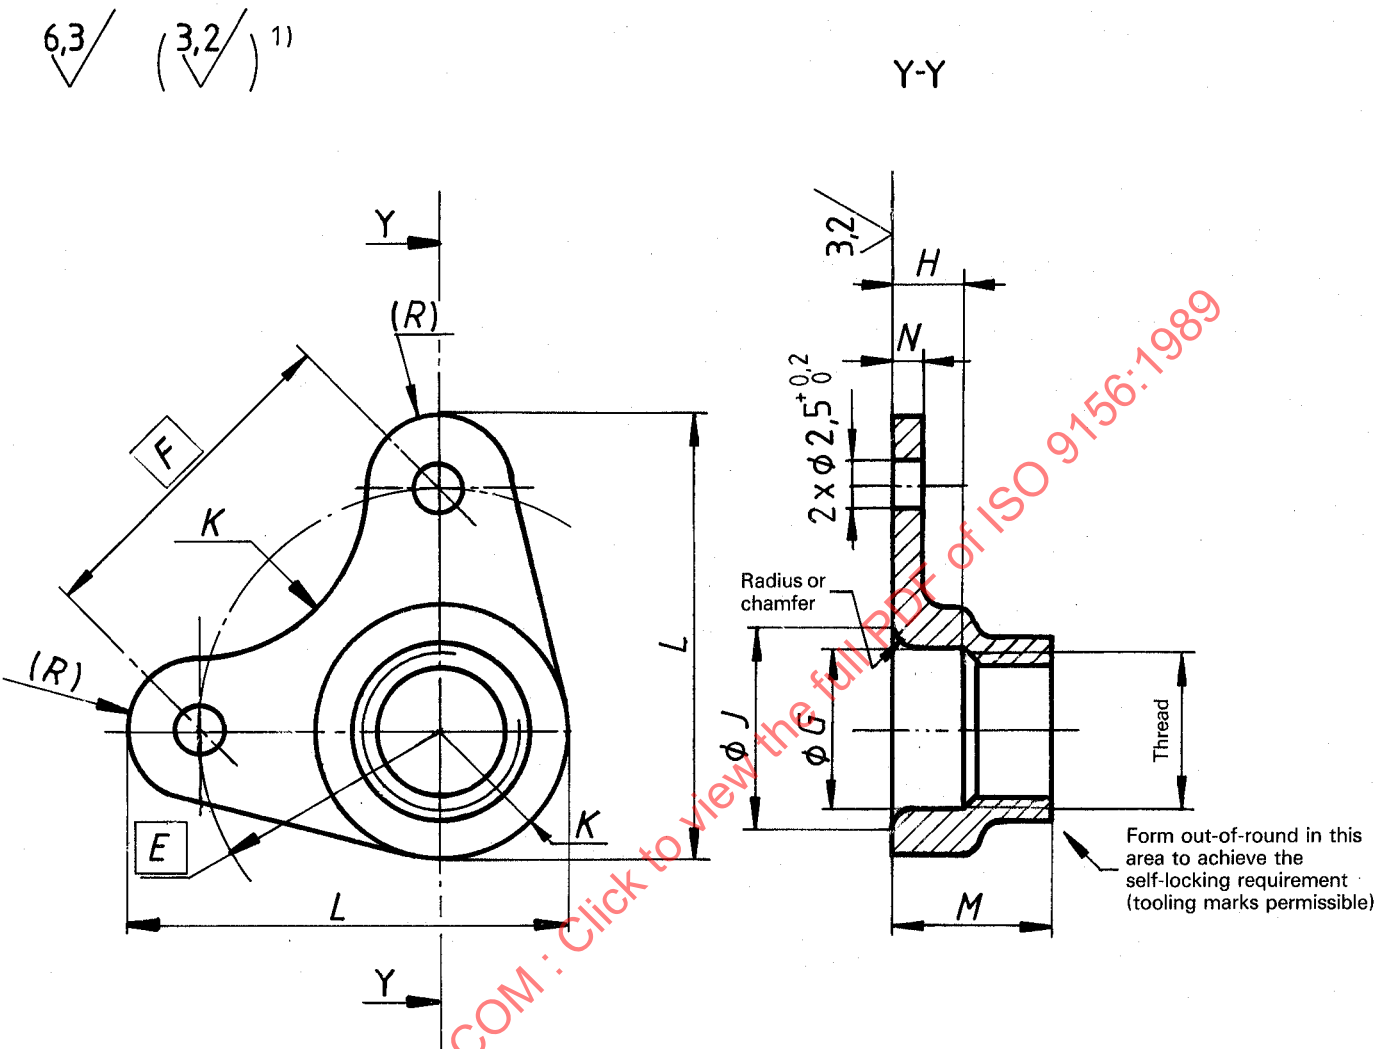


Table 3), 4), 5)

Size code	Thread ⁶⁾	E	F	G min.	H min.	J ⁷⁾ max.	K max.	L max.	M max.	N ⁸⁾ max.	R
040	MJ 4 × 0,7 — 4H6H	6	8,5	4,4	2,2	6,2	4	12,7	5,8	1	2,5
050	MJ 5 × 0,8 — 4H6H	7	9,9	5,5	2,4	7,3	4,5	14,2	6,9	1	2,5
060	MJ 6 × 1 — 4H5H	8	11,3	6,5	2,7	8,7	5	16,2	8,1	1,2	3

- 1) These values, in micrometres, are applicable before any coating is applied. This requirement does not apply to threads, punched holes or sheared edges, the surface texture of which will be as achieved by the usual manufacturing methods.
- 2) Details of form not stated are left to the manufacturer's discretion.
- 3) The dimensions and tolerances are applicable after any coating has been applied, but before the application of any dry film lubricant.
- 4) Remove sharp edges 0,1 to 0,4.
- 5) The tolerances of form and position are laid down in ISO 8788.
- 6) In accordance with ISO 5855-2. In the self-locking zone, the tolerances apply before forming out-of-round.
- 7) Measured to points of tangency (radiused) or to sharp corners (chamfered).
- 8) Sheet thickness, applicable at the rivet location.