

---

---

**Tools for pressing — Guide pillars —**  
**Part 3:**  
**Type B, end-locking pillars**

*Outillage de presse — Colonnes de guidage —*  
*Partie 3: Type B, colonnes à retenue médiane*

STANDARDSISO.COM : Click to view the full PDF of ISO 9182-3:2023



STANDARDSISO.COM : Click to view the full PDF of ISO 9182-3:2023



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

|                              |    |
|------------------------------|----|
| Foreword.....                | iv |
| 1 Scope.....                 | 1  |
| 2 Normative references.....  | 1  |
| 3 Terms and definitions..... | 1  |
| 4 Dimensions.....            | 1  |
| 5 Material.....              | 5  |
| 6 Designation.....           | 5  |
| Bibliography.....            | 7  |

STANDARDSISO.COM : Click to view the full PDF of ISO 9182-3:2023

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at [www.iso.org/patents](http://www.iso.org/patents). ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 8, *Tools for pressing and moulding*.

This fourth edition cancels and replaces the third edition (ISO 9182-3:2020) which has been technically revised.

The main changes are as follows:

- complete modification of types B1 and B2;
- modification of the hardness of the pillar.

A list of all parts in the ISO 9182 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

# Tools for pressing — Guide pillars —

## Part 3: Type B, end-locking pillars

### 1 Scope

This document specifies the dimensions and tolerances of guide pillars, type B, intended for use in press tools.

This document gives guidance on the materials and specifies the hardness and the designation of guide pillars which meet the requirements of this document.

### 2 Normative references

There are no normative references in this document.

### 3 Terms and definitions

No terms and definition are listed in this document.


ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

### 4 Dimensions

The dimensions of end-locking guide pillar (type B1) shall conform to the indications of [Figure 1](#) and [Table 1](#).

The dimensions of guide pillars with centre-locking and locking ring (type B2) shall conform to the indications of [Figure 2](#) and [Table 2](#).

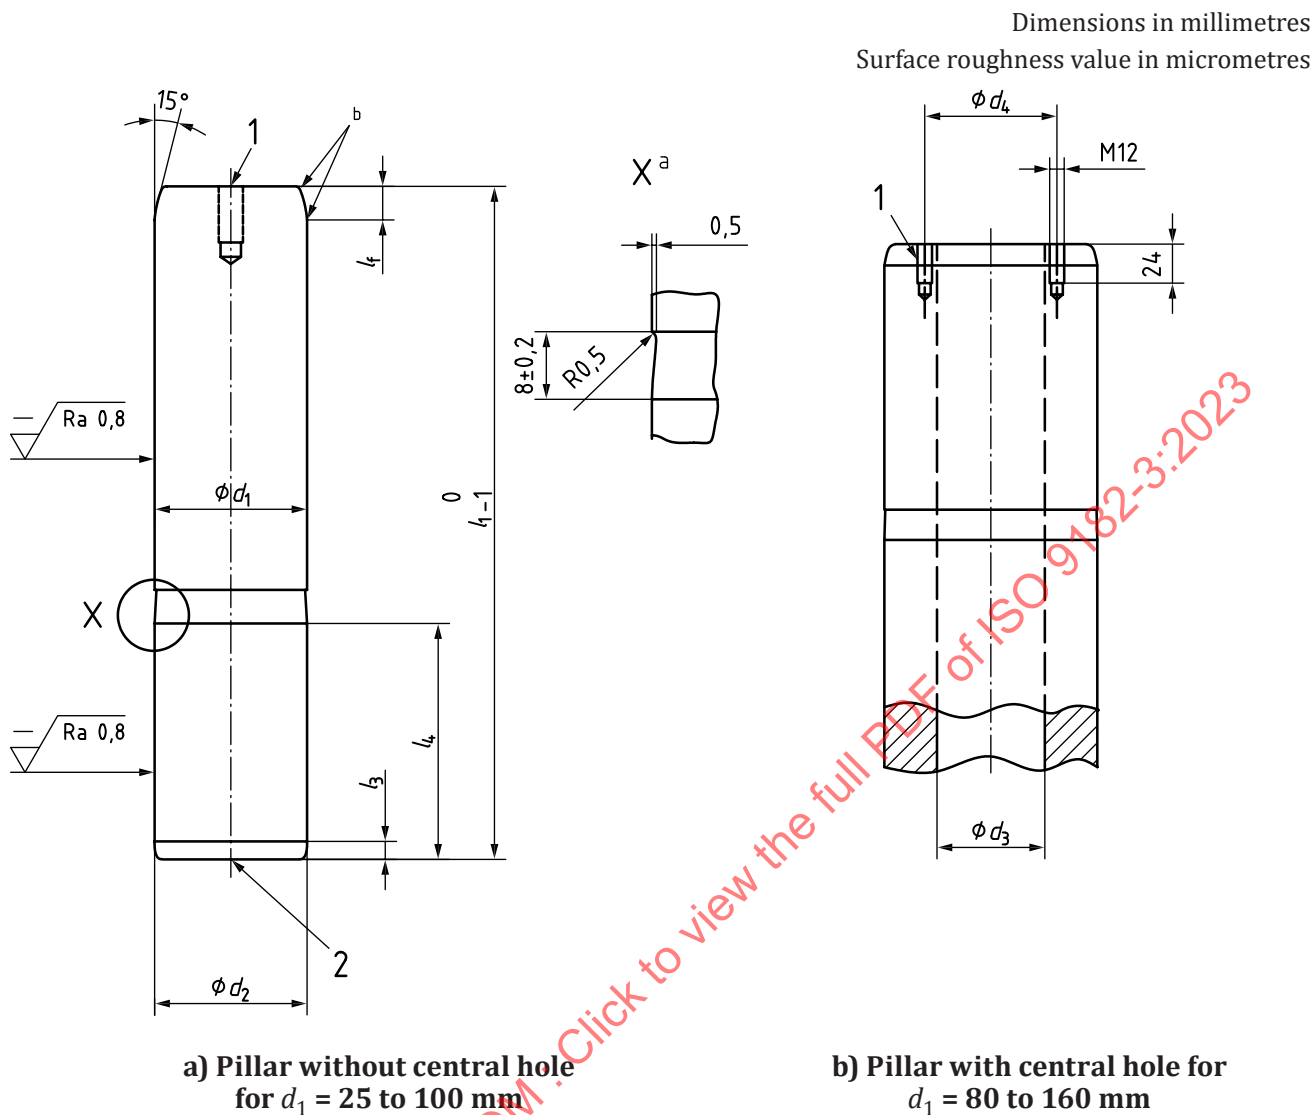

**Key**

- 1 lifting thread M12 for transporting the pillar for  $d_1 = 80$  mm and  $d_1 = 100$  mm
- 2 centre hole

NOTE Centre holes are defined in ISO 6411.

<sup>a</sup> Undercut.

<sup>b</sup> Slightly rounded. The values of the radii are left to the manufacturer's discretion.

**Key**

- 1 lifting threads for transporting the pillar

**Figure 1 — Type B1, end-locking guide pillar**

**Table 1 — Dimensions of end-locking guide pillar (type B1)**

Dimensions in millimetres

|                   |     |     |     |     |     |     |     |     |     |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| $d_1$ f6          | 25  | 32  | 40  | 50  | 63  | 80  | 100 | 125 | 160 |
| $d_2$ r6          | 25  | 32  | 40  | 50  | 63  | 80  | 100 | 125 | 160 |
| $l_f$ $^{+0,8}_0$ | 8   | 8   | 8   | 10  | 10  | 10  | 10  | 12  | 12  |
| $d_3 \pm 2$       | —   | —   | —   | —   | —   | 40  | 50  | 65  | 95  |
| $d_4$ $^{+0,8}_0$ | —   | —   | —   | —   | —   | a   | 72  | 90  | 132 |
| $l_3$ $^{+0,8}_0$ | 4   | 4   | 4   | 4   | 4   | 4   | 4   | 5   | 5   |
| $l_4$ $^{+0,8}_0$ | 40  | 45  | 56  | 70  | 80  | 100 | 125 | 140 | 180 |
| $l_1$             | 125 | (×) |     |     |     |     |     |     |     |
|                   | 140 | (×) | (×) | (×) |     |     |     |     |     |
|                   | 160 | ×   | ×   | ×   | ×   |     |     |     |     |
|                   | 180 | (×) | (×) | (×) | (×) | (×) |     |     |     |
|                   | 200 | ×   | ×   | ×   | ×   | ×   | ×   |     |     |
|                   | 224 | (×) | (×) | (×) | (×) | (×) | (×) | (×) |     |
|                   | 250 |     | ×   | ×   | ×   | ×   | ×   | ×   |     |
|                   | 280 |     |     | (×) | (×) | (×) | (×) | (×) |     |
|                   | 315 |     |     |     | ×   | ×   | ×   | ×   | ×   |
|                   | 355 |     |     |     | ×   | ×   | ×   | ×   | ×   |
|                   | 400 |     |     |     |     | (×) | ×   | ×   | ×   |
|                   | 450 |     |     |     |     |     | (×) | (×) | ×   |
|                   | 500 |     |     |     |     |     |     | ×   | ×   |
|                   | 560 |     |     |     |     |     |     |     | (×) |

**Key**


× standardized preferred dimension

(×) standardized dimension

NOTE Tolerance classes and limit deviations are defined in ISO 286-2.

a For diameter  $d_1 = 80$  no thread when there is a central hole [see [Figure 1 b](#)].

Dimensions in millimetres  
Surface roughness value in micrometres

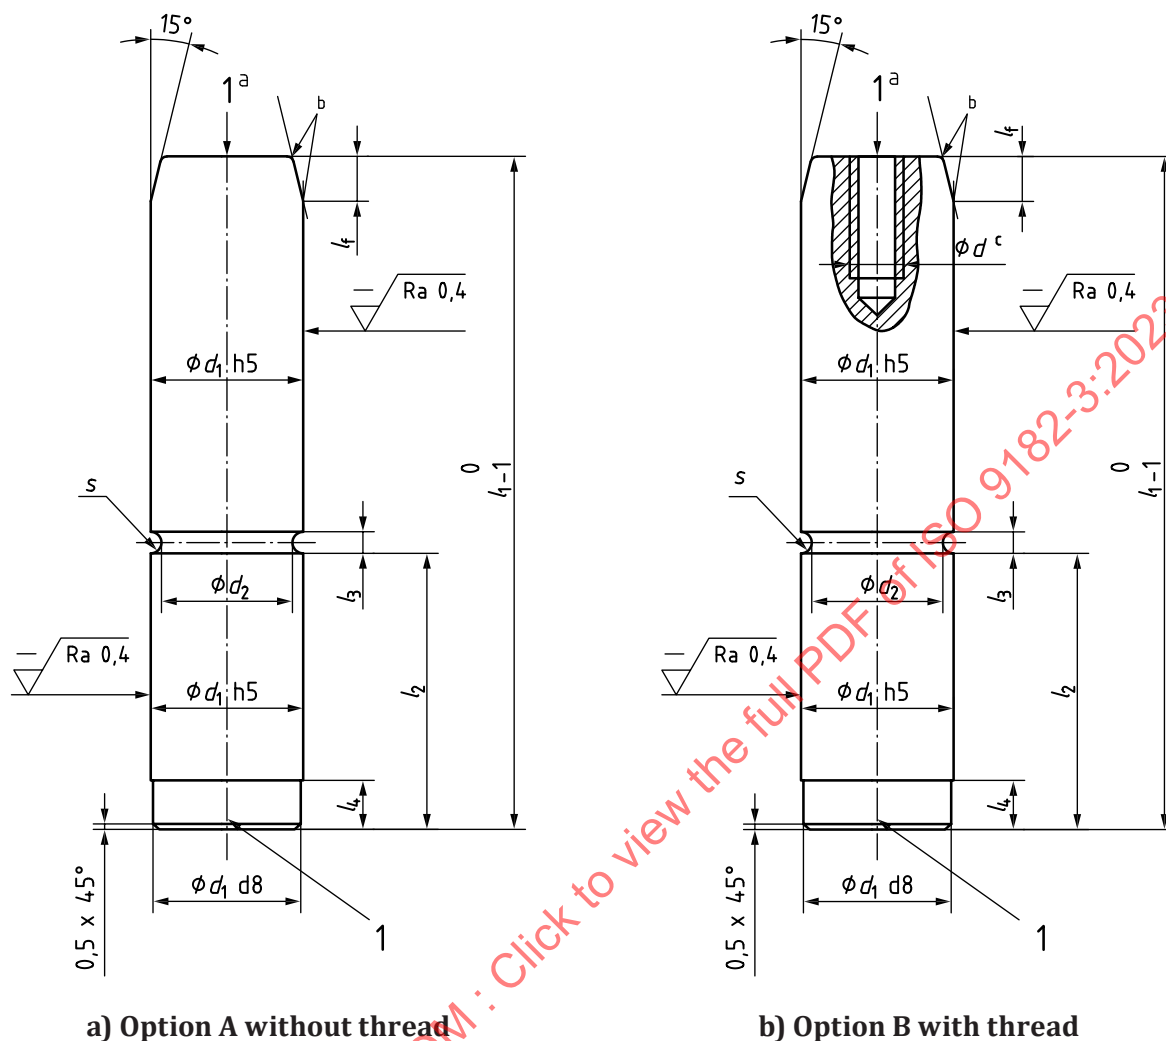

**Key**

1 centre hole

NOTE Centre holes are defined in ISO 6411.

a Optional.

b Slightly rounded. The values of the radii are left to the manufacturer's discretion.

c The diameter of the thread is left to the manufacturer's discretion.

**Figure 2 — Type B2, guide pillars with centre-locking and locking ring**

**Table 2 — Dimensions of guide pillars with centre locking and locking ring (type B2)**

Dimensions in millimetres

|                          |     |      |      |      |      |      |      |      |
|--------------------------|-----|------|------|------|------|------|------|------|
| $d_1$                    |     | 25   | 32   | 40   | 50   | 63   | 80   | 100  |
| $d_{2-0,1}^0$            |     | 22,3 | 27,8 | 35,8 | 45,8 | 56,8 | 73,8 | 93,8 |
| $l_f$                    |     | 8    | 10   | 12   | 16   | 16   | 16   | 16   |
| $l_2$                    |     | 25   | 32   | 63   | 80   | 100  | 125  | 160  |
| $l_3^{+0,05}_0$          |     | 2,7  | 4,2  | 4,2  | 4,2  | 6,2  | 6,2  | 6,2  |
| $l_4$                    |     | 8    | 12   | 12   | 12   | 18   | 18   | 18   |
| $S$                      |     | 1,35 | 2,1  | 2,1  | 2,1  | 3,1  | 3,1  | 3,1  |
| $l_1$                    | 125 | ×    |      |      |      |      |      |      |
|                          | 140 |      | ×    |      |      |      |      |      |
|                          | 160 |      | ×    |      |      |      |      |      |
|                          | 180 |      | ×    | ×    |      |      |      |      |
|                          | 200 |      | ×    | ×    |      |      |      |      |
|                          | 224 |      |      | ×    | ×    |      |      |      |
|                          | 250 |      |      | ×    | ×    | ×    |      |      |
|                          | 280 |      |      |      | ×    | ×    |      |      |
|                          | 315 |      |      |      |      | ×    | ×    |      |
|                          | 355 |      |      |      |      |      | ×    |      |
|                          | 400 |      |      |      |      |      | ×    | ×    |
|                          | 450 |      |      |      |      |      |      | ×    |
| <b>Key</b>               |     |      |      |      |      |      |      |      |
| × standardized dimension |     |      |      |      |      |      |      |      |

## 5 Material

The material and hardness are to the manufacturer's discretion, but the hardness shall be  $(56^{+2}_0)$  HRC.

NOTE Rockwell C hardness (HRC) is defined in ISO 6508-1.

## 6 Designation

Guide pillars for press tools in accordance with this document shall be designated by:

- "Guide pillar";
- a reference to this document, i.e. ISO 9182-3:2023;
- its type;
- its diameter,  $d_1$ , in millimetres, and corresponding tolerance;
- its overall length,  $l_1$ , in millimetres;
- option A (for type B1 without central hole or for type B2 without thread) or option B (for type B1 with central hole or for type B2 with thread).

EXAMPLE 1 A guide pillar, type B1, of diameter  $d_1 = 25$  mm with a tolerance f6, and overall length  $l_1 = 125$  mm with a central hole is designated as follows:

**Guide pillar ISO 9182-3 – B1 – 25f6 × 125 – B (option with central hole)**