

INTERNATIONAL STANDARD



**Internet of Things (IoT) – Underwater acoustic sensor network (UWASN) –
Network management system –
Part 2: Underwater management information base (u-MIB)**

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 30142-2:2022



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2022 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 30142-2:2022

INTERNATIONAL STANDARD



**Internet of Things (IoT) – Underwater acoustic sensor network (UWASN) –
Network management system –
Part 2: Underwater management information base (u-MIB)**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.110

ISBN 978-2-8322-4503-3

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	7
3 Terms and definitions	7
4 Abbreviated terms	8
5 u-MIB overview and basic concepts	8
5.1 u-MIB definition.....	8
5.2 Necessity of u-MIB in U-NMS.....	9
5.3 U-NMS system architecture for using u-MIB.....	9
5.4 Structure of u-MIB.....	10
5.4.1 General	10
5.4.2 u-MIB objects	10
5.4.3 u-MIB OIDs.....	10
5.4.4 u-MIB OID hierarchy	10
5.5 General format of managed objects in u-MIB	11
6 General requirements for constructing u-MIB in U-NMS.....	12
7 Designing the managed objects of manager and agent u-MIB.....	14
7.1 Object identifiers of u-MIB.....	14
7.2 Classification of u-MIB tables.....	15
7.3 Classification of MOs in the manager and agent u-MIB	15
7.4 MOs of u-MIB Trap	22
8 Integrating MOs of the manager and agent u-MIB.....	23
Annex A (informative) u-MIB Module.....	25
A.1 Example of creating u-MIB objects.....	25
A.2 Example of accessing MOs between manager and agent.....	28
Bibliography.....	31
Figure 1 – Elements of u-MIB in U-NMS.....	8
Figure 2 – U-NMS system architecture for using u-MIB	10
Figure 3 – u-MIB hierarchy structure	11
Figure 4 – General format of u-MIB.....	12
Figure 5 – MOs of the manager and agent u-MIB	16
Figure 6 – Structure of <i>event_trap</i>	22
Figure 7 – Integration of MOs between manager and agent u-MIB	23
Figure 8 – MOs' requests via the network management protocol.....	24
Figure A.1 – Device battery information requests via u-MIB in U-NMS	29
Figure A.2 – Example of MO value access from u_MIB	30
Table 1 – u-MIB object groups	11
Table 2 – Attributes used for representing MOs in u-MIB	12
Table 3 – Underwater network requirements of u-MIB in U-NMS	12
Table 4 – Mandatory underwater device requirements of u-MIB in U-NMS	13

Table 5 – Mandatory data type requirements of u-MIB in U-NMS	14
Table 6 – OIDs of u-MIB	14
Table 7 – Defining u-MIB tables	15
Table 8 – MOs of <i>u_networks</i>	17
Table 9 – MOs of <i>u_devices</i>	19
Table 10 – MOs of <i>u_trap</i> object in u-MIB	22

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 30142-2:2022

INTERNET OF THINGS (IoT) – UNDERWATER ACOUSTIC SENSOR NETWORK (UWASN) – NETWORK MANAGEMENT SYSTEM –

Part 2: Underwater management information base (u-MIB)

FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO National bodies.
- 3) IEC and ISO documents have the form of recommendations for international use and are accepted by IEC and ISO National bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC and ISO documents is accurate, IEC and ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC and ISO National bodies undertake to apply IEC and ISO documents transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC and ISO document and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC and ISO do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC and ISO marks of conformity. IEC and ISO are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this document.
- 7) No liability shall attach to IEC and ISO or their directors, employees, servants or agents including individual experts and members of its technical committees and IEC and ISO National bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this ISO/IEC document or any other IEC and ISO documents.
- 8) Attention is drawn to the Normative references cited in this document. Use of the referenced publications is indispensable for the correct application of this document.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC document may be the subject of patent rights. IEC and ISO shall not be held responsible for identifying any or all such patent rights.
- 10) The managed objects need to highlight specifically throughout this document. Therefore, the managed objects in this document are highlighted with italic font style.

ISO/IEC 30142-2 has been prepared by subcommittee 41: Internet of Things and Digital Twin, of ISO/IEC joint technical committee 1: Information technology. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
JTC1-SC41/288/FDIS	JTC1-SC41/296/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1, available at www.iec.ch/members_experts/refdocs and www.iso.org/directives.

In order to highlight specifically the managed objects in this document, the managed objects are written in italics throughout this document.

A list of all parts in the ISO/IEC 30142 series, published under the general title *Internet of Things (IoT) – Underwater acoustic sensor network (UWASN) – Network management system*, can be found on the IEC website.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 30142-2:2022

INTRODUCTION

Water covers approximately 70 % of the surface of the Earth. Modern technologies introduce new methods to monitor the body of water, such as pollution monitoring and detection. Underwater data gathering techniques require exploring the water environment, which can be most effectively performed by underwater acoustic sensor networks (UWASNs). Applications developed for the UWASNs can record underwater climate, detect and control water pollution, monitor marine biology, discover natural resources, detect pipeline leakages, monitor and find underwater intruders, perform strategic surveillance, and so on.

To build and apply the UWASN technology, most suitable methods for managing the network have been developed based on the ISO/IEC 30140 series. This document describes the network management outline and requirements appropriate to the UWASN under the constraints of an underwater physical environment.

The ISO/IEC 30142 series provides information such as requirements of an underwater network management system (U-NMS), functions supporting U-NMS, and components required for U-NMS in UWASN.

This document provides the underwater management information base (u-MIB) for the U-NMS. u-MIB is a hierarchical database specifically designed for managing the networks or devices in the underwater network management system of UWASN.

Various technical standards derived from the R&D results of the technical areas under the UWASN and underwater communication fields not covered by the ISO/IEC 30140 series are continuously proposed and developed.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 30142-2:2022

INTERNET OF THINGS (IoT) – UNDERWATER ACOUSTIC SENSOR NETWORK (UWASN) – NETWORK MANAGEMENT SYSTEM –

Part 2: Underwater management information base (u-MIB)

1 Scope

This document provides the underwater management information base (u-MIB) of the underwater network management system (U-NMS). It specifies the following:

- general requirements for constructing u-MIB in U-NMS;
- designing the managed objects of the manager and agent u-MIB;
- integrating the managed objects of the manager and agent u-MIB.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

managed object

abstract representation of an underwater object or resource in u-MIB that is managed using an underwater network management system

3.2

managed objects

collection of underwater objects or resources that are defined in the underwater management information base (u-MIB)

Note 1 to entry: The managed objects (MOs) are the component used for exchanging the information between manager and agent in U-NMS.

3.3

management protocol

protocol used for carrying information between the manager and agent in U-NMS

3.4

TABLE

data type that holds a collection of information related to underwater networks and underwater devices

EXAMPLE The notification record.

3.5

OBJID

data type that holds the unique identity of each managed object

4 Abbreviated terms

MO	managed object
MOs	managed objects
MIB	management information base
OID	object identifier
u-MIB	underwater management information base
U-NMS	underwater network management system
UUV	unmanned underwater vehicle
UWA-CH	underwater acoustic cluster head
UWA-GW	underwater acoustic gateway
UWA-SNode	underwater acoustic sensor node

5 u-MIB overview and basic concepts

5.1 u-MIB definition

Underwater management information base (u-MIB) is a database specifically designed for managing the elements or entities in the underwater network management system (U-NMS). Figure 1 shows the elements of U-NMS where u-MIB is included. The u-MIB is included in the elements such as a manager and an agent.

- In U-NMS, the manager is the program installed in the devices to control the whole functions of underwater networks.
- The agent is the program that is bundled inside the underwater devices such as UWA-GW, UWA-CH, UUV, UWA-SNode, etc.
- Management protocol defines the format of a packet exchange between a manager and an agent in U-NMS.
- u-MIB creates the collection of managed objects (MOs) that uses the structured format for defining the name and objects which are adapted to U-NMS.

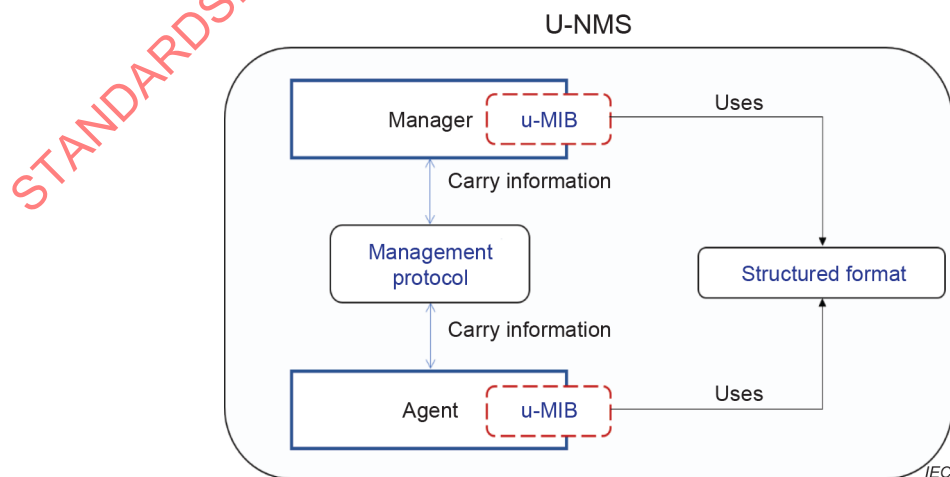


Figure 1 – Elements of u-MIB in U-NMS

5.2 Necessity of u-MIB in U-NMS

The environmental condition of underwater networks is considerably different from that of terrestrial area networks. Hence, the underwater network management system is necessary to handle the networks and devices in the underwater environment. In this case, it is difficult to adapt the legacy management information base (MIB) to the underwater environment because of the following factors.

- a) The resource availability of underwater devices is extremely different from terrestrial devices.
- b) MIB in terrestrial area networks holds a huge number of MOs. Hence, it is heavyweight and therefore it is difficult to adapt it to underwater devices .

Therefore, it is necessary to establish a unique underwater MIB based on the condition of the underwater environment by reducing the MOs. The reduced MOs can be termed "u-MIB", which has the key functions of U-NMS and is utilized to monitor the status of devices and networks in the underwater environment.

The specific roles of u-MIB in U-NMS are given below.

- Used as the database: u-MIB is used by the manager and agent for storing and retrieving information in U-NMS.
- Avoiding complexity: u-MIB is the lightweight version with limited MOs. Therefore, it is suitable for the U-NMS components such as manager and agent. This can avoid the complexity in U-NMS.
- Easy adaptation/management: Due to the dynamic changes in the underwater environment, the MOs need to be created based on the problems in U-NMS such as memory problems, battery problems, connection problems, etc. Therefore, the U-NMS components can be adapted or managed easily in the underwater environment.

5.3 U-NMS system architecture for using u-MIB

Figure 2 shows the U-NMS system architecture for using u-MIB, which indicates the formation of u-MIB in U-NMS components such as the manager, and agent. The u-MIB is installed separately into the manager and agent components of U-NMS. The installed MOs are extremely different for both manager and agent u-MIB. The methods such as Get Request, Get Response, Set Request and Set Response are used by the manager to MOs from the agent. Trap is the notification message sent by the agent if some critical events occur in underwater devices such as the increase in temperature, reduced battery charge, out of memory space, etc. The exchange of messages between the manager and agents is performed using the network management protocol.

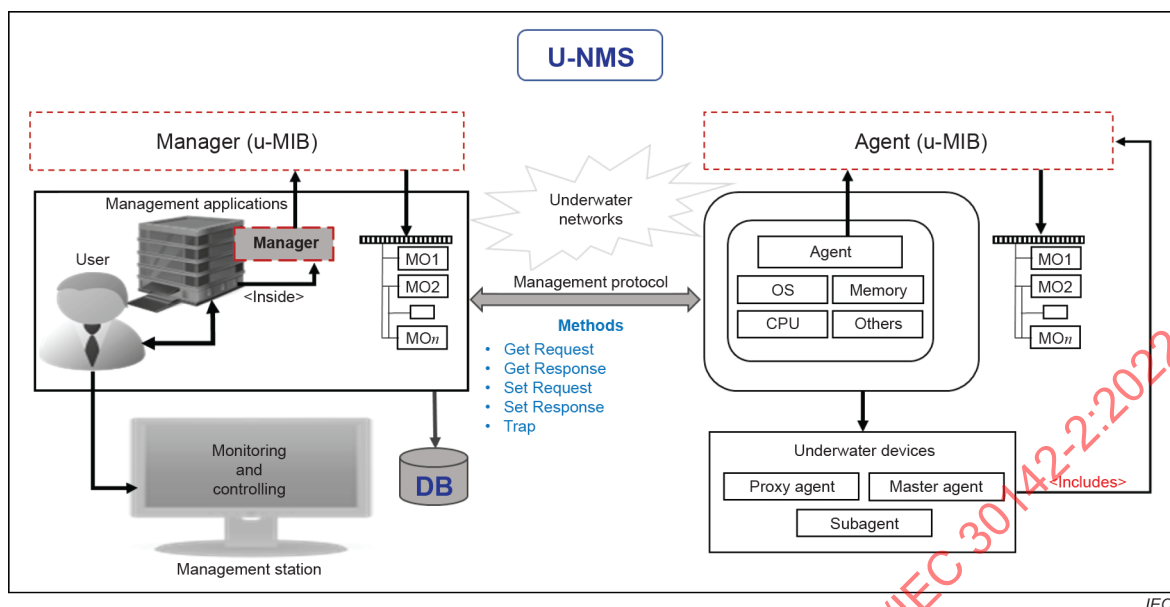


Figure 2 – U-NMS system architecture for using u-MIB

5.4 Structure of u-MIB

5.4.1 General

In general, the u-MIB is designed using the collection of MOs constructed in a hierarchical structure, as shown in Figure 3.

5.4.2 u-MIB objects

It is the collection of MOs in U-NMS. u-MIB objects comprise management information of each device in U-NMS built in a structured format.

5.4.3 u-MIB OIDs

The object identifiers (OIDs) in u-MIB allow the U-NMS to access information inside the U-NMS devices.

5.4.4 u-MIB OID hierarchy

The OIDs of u-MIB are described in a hierarchical format (*u-MIBObjects u_networks* and *u-MIBObjects u_devices*).

- *u-MIBObjects*;
- *u_networks*;
- *u_devices*.

u-MIB in U-NMS can be categorized into two sections.

- a) *u_networks*: It is also known as underwater network information. In this case, OIDs are utilized to manage the network link between U-NMS devices.

MOs of network management are built under the name *u_networks* in *u-MIBObjects*. For example, checking the connectivity between the devices.

- b) *u_devices*: It is also known as underwater device information. In this case, OIDs are utilized to manage the specific devices in U-NMS, such as the proxy agent, master agent, and subagent.

MOs of device management are built under the name *u_devices* in *u-MIBObjects*. For example, underwater devices battery management is the *u-MIBObjects* under *u-devices*.

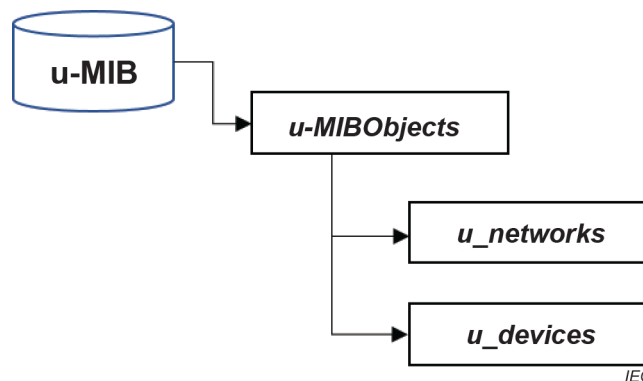


Figure 3 – u-MIB hierarchy structure

Table 1 shows the two-essential u-MIB object groups of U-NMS such as *u_networks* and *u_devices*.

Table 1 – u-MIB object groups

u-MIB Objects	Type	Object Identifier	Object Identifier Name
<i>u_networks</i>	GROUP	1.1	<i>u-MIBObjects(1).u_networks(1)</i>
<i>u_devices</i>	GROUP	1.2	<i>u-MIBObjects(1).u_devices(2)</i>

5.5 General format of managed objects in u-MIB

Figure 4 shows the general structure of u-MIB objects in U-NMS. u-MIB includes a collection of MOs that include the network management information of underwater devices. Each MO is designed using the name, data type, right to access, status indicator, and object description customized to underwater communication. Interface description language is used for defining MOs in u-MIB. The structured format is used for defining the name and objects in u-MIB.

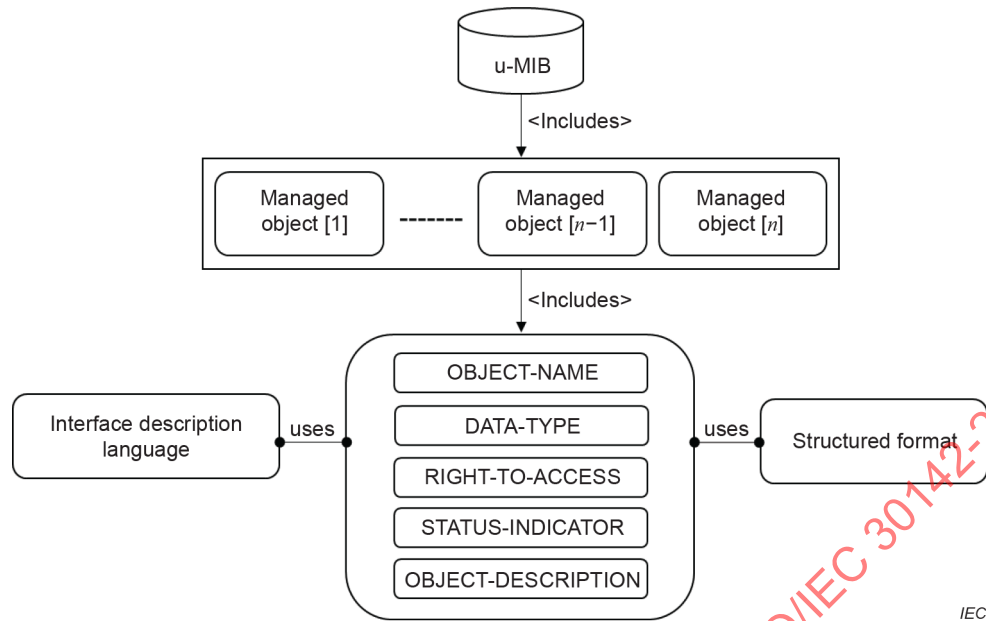


Figure 4 – General format of u-MIB

Table 2 shows the attributes for defining MOs in U-NMS.

Table 2 – Attributes used for representing MOs in u-MIB

Keywords	Description
OBJECT-NAME	It describes the name of the objects such as MIB version, device name, etc.
DATA-TYPE	It describes the data types corresponding to the OBJECT-NAME, such as INTEGER, STRING, etc.
RIGHT-TO-ACCESS	It indicates permission to retrieve objects such as read-write, read-only, etc.
STATUS-INDICATOR	It describes whether the object is mandatory or optional.
OBJECT-DESCRIPTION	It defines the textual description of objects.

6 General requirements for constructing u-MIB in U-NMS

The general requirements of u-MIB design are based on two parts: (1) underwater network requirements for designing u-MIB, and (2) underwater devices requirements for designing u-MIB. The underwater network specification requirements are established based on the factors considering the networks in the underwater environment. Table 3 shows the requirements of underwater networks for designing u-MIB.

Table 3 – Underwater network requirements of u-MIB in U-NMS

Name	Description
Networks connectivity information	Network type, link quality, signal strength, number of devices connected, network active time with devices, network suspended time with devices, etc. shall be used in u-MIB to identify the network connectivity status in underwater networks.
Networks packets information	The packets information of underwater networks such as packets received, packets transferred, Get Request, Set Request, etc. shall be used to send or receive the packets in underwater networks.
Networks notification	Trap messages shall be used in underwater networks when some critical events occur in networks such as link failure and authentication failure.

The underwater device specification requirements are separated into two parts: (1) object information, and (2) object status. The object information represents the general information about the underwater object such as device name, device manufacturer name, device ID, etc. The object status represents the device status such as battery damaged, out of memory, etc. Table 4 shows the mandatory requirements of underwater devices for designing u-MIB.

Table 4 – Mandatory underwater device requirements of u-MIB in U-NMS

Name	Description
Device information	The information such as <i>u_devices_ID</i> , <i>u_devices_firmware</i> , <i>u_devices_manufacturer_name</i> , <i>u_devices_type</i> , etc. shall be used to identify the general information of devices in underwater networks.
Device status	Device status information shall be used to indicate the status of underwater devices such as <i>u_devices_active_time</i> , <i>u_devices_location</i> , <i>u_devices_suspendedtime</i> , etc.
Battery information	Information such as <i>u_devices_battery_available</i> , <i>u_devices_battery_total</i> , and <i>u_devices_battery_used</i> shall be used to indicate the resource availability of battery in underwater devices.
Battery status	The battery status information shall be used to report the current status of the battery in underwater devices such as <i>u_devices_battery_damaged</i> , <i>u_devices_battery_low</i> , <i>u_devices_battery_normal</i> , etc.
Memory information	The information such as <i>u_devices_memory_available</i> , <i>u_devices_memory_total</i> , and <i>u_devices_memory_used</i> shall be used to indicate the resource availability of memory in underwater devices.
Memory status	The memory status information shall be used to report the current status of memory in underwater devices such as <i>u_devices_memory_damaged</i> , <i>u_devices_memory_low</i> , etc.
Location information	The information such as <i>u_devices_address</i> , <i>u_devices_depth</i> , <i>u_devices_received_time</i> , etc. shall be used to identify the position of underwater devices.
Connectivity information	The information such as <i>u_devices_network_type</i> , <i>u_devices_signal_link_quality</i> , <i>u_devices_signal_strength</i> , etc. shall be used to find the connectivity between the devices in underwater networks.
Message information	The information such as <i>u_devices_max_size</i> , <i>u_devices_rcvd_bits</i> , etc. shall be used to report total data collected in underwater networks such as the total number of messages received, the total number of messages sent, etc.
Notification information	The information such as <i>u_devices_event_code</i> , <i>u_devices_event_description</i> , <i>u_devices_event_name</i> , <i>u_devices_event_send_time</i> , etc. shall be used to describe the critical event information in detail such as event name, event code, event ID, event time, etc.
Notification status	The notification status information shall be used to report the critical situation of underwater devices such as <i>u_devices_battery_trap</i> , <i>u_devices_link_failure_trap</i> , <i>u_devices_low_signal_trap</i> , etc.
Temperature status	The temperature status information shall be used to report the current temperature status of underwater devices such as <i>u_devices_curr_temp_level</i> , and <i>u_devices_notify_temp_limit</i> .

Table 5 shows the mandatory data types required for designing u-MIB in U-NMS.

Table 5 – Mandatory data type requirements of u-MIB in U-NMS

Types	Description
INTEGER	It indicates the MO value of u-MIB that holds a whole number.
FLOAT	It indicates the MO value of u-MIB which uses the combination of a whole number and a decimal number.
STRING	It indicates the MO value of u-MIB with a sequence of characters, which also includes special characters and numbers.
OBJID	It indicates MO's position in u-MIB
TABLE	It indicates types of data inside columns and variables in u-MIB.
TIME	It indicates the DATETIME value inside the u-MIB as two integers. One represents the date and the other represents the time.
BOOLEAN	It indicates the MO value of u-MIB that holds either one of two values. For example, true or false.
LOCATION	It indicates the MO value of type LOCATION (value1, value2, value3) in u-MIB. Value1, value2, and value3 can be FLOAT data type.

7 Designing the managed objects of manager and agent u-MIB

7.1 Object identifiers of u-MIB

Table 6 depicts the OIDs of u-MIB. The u-MIB information like *u_networks*, *u_networks_connectivity_info*, *u_networks_notification_info*, *u_networks_packets_info*, etc. can be accessed using variables such as *Object Names*, *Type*, *OID*, and *Object Identifier Name*. Here, *u_networks*, *u_networks_connectivity_info*, *u_devices*, etc. are the Object Names, and OBJID is the data type used for accessing the u-MIB information.

Table 6 – OIDs of u-MIB

Object Names	Type	OID	Object Identifier Name
<i>u_networks</i>	OBJID	1.1	<i>u-MIBObjects(1).u_networks(1)</i>
<i>u_networks_connectivity_info</i>	OBJID	1.1.1	<i>u-MIBObjects(1).u_networks(1).u_networks_connectivity_info(1)</i>
<i>u_networks_notification_info</i>	OBJID	1.1.2	<i>u-MIBObjects(1).u_networks(1).u_networks_notification_info(2)</i>
<i>u_networks_packets_info</i>	OBJID	1.1.3	<i>u-MIBObjects(1).u_networks(1).u_networks_packets_info(3)</i>
<i>u_devices</i>	OBJID	1.2	<i>u-MIBObjects(1).u_devices(2)</i>
<i>u_devices_battery_info</i>	OBJID	1.2.1	<i>u-MIBObjects(1).u_devices(2).u_devices_battery_info(1)</i>
<i>u_devices_battery_status</i>	OBJID	1.2.2	<i>u-MIBObjects(1).u_devices(2).u_devices_battery_status(2)</i>
<i>u_devices_connectivity_info</i>	OBJID	1.2.3	<i>u-MIBObjects(1).u_devices(2).u_devices_connectivity_info(3)</i>
<i>u_devices_info</i>	OBJID	1.2.4	<i>u-MIBObjects(1).u_devices(2).u_devices_info(4)</i>
<i>u_devices_location_info</i>	OBJID	1.2.5	<i>u-MIBObjects(1).u_devices(2).u_devices_location_info(5)</i>
<i>u_devices_memory_info</i>	OBJID	1.2.6	<i>u-MIBObjects(1).u_devices(2).u_devices_memory_info(6)</i>
<i>u_devices_memory_status</i>	OBJID	1.2.7	<i>u-MIBObjects(1).u_devices(2).u_devices_memory_status(7)</i>
<i>u_devices_message_info</i>	OBJID	1.2.8	<i>u-MIBObjects(1).u_devices(2).u_devices_message_info(8)</i>
<i>u_devices_notification_info</i>	OBJID	1.2.9	<i>u-MIBObjects(1).u_devices(2).u_devices_notification_info(9)</i>
<i>u_devices_notification_status</i>	OBJID	1.2.10	<i>u-MIBObjects(1).u_devices(2).u_devices_notification_status(10)</i>
<i>u_devices_status</i>	OBJID	1.2.11	<i>u-MIBObjects(1).u_devices(2).u_devices_status(11)</i>
<i>u_devices_temperature_status</i>	OBJID	1.2.12	<i>u-MIBObjects(1).u_devices(2).u_devices_temperature_status(12)</i>

7.2 Classification of u-MIB tables

Table 7 depicts the TABLE types used in the u-MIB of U-NMS. The TABLE information like *u_networks_notification_table* and *u_devices_notification_table* can be accessed using variables such as Table Name, Type, OID, and Object Identifier Name. Here, TABLE is the data type that holds a collection of information. For example, *u_networks_notification_table* holds the notification information of underwater networks.

Table 7 – Defining u-MIB tables

Table Names	Type	OID	Object Identifier Name
<i>u_networks_notification_table</i>	TABLE	1.1.2.3	<i>u-MIBObjects(1).u_networks(1).u_networks_notification_info(2).u_networks_notification_table(3)</i>
<i>u_devices_notification_table</i>	TABLE	1.2.9.5	<i>u-MIBObjects(1).u_devices(2).u_devices_notification_info(9).u_devices_notification_table(5)</i>

7.3 Classification of MOs in the manager and agent u-MIB

Figure 5 shows the MOs of u-MIB. In u-MIB, the MOs are grouped under *u_networks* and *u_devices*. The *u_networks* is classified into three categories: *u_networks_connectivity_info*, *u_networks_notification_info*, *u_networks_packets_info*. The *u_devices* is classified into twelve categories: *u_devices_battery_info*, *u_devices_info*, *u_devices_location_info*, *u_devices_memory_info*, etc.

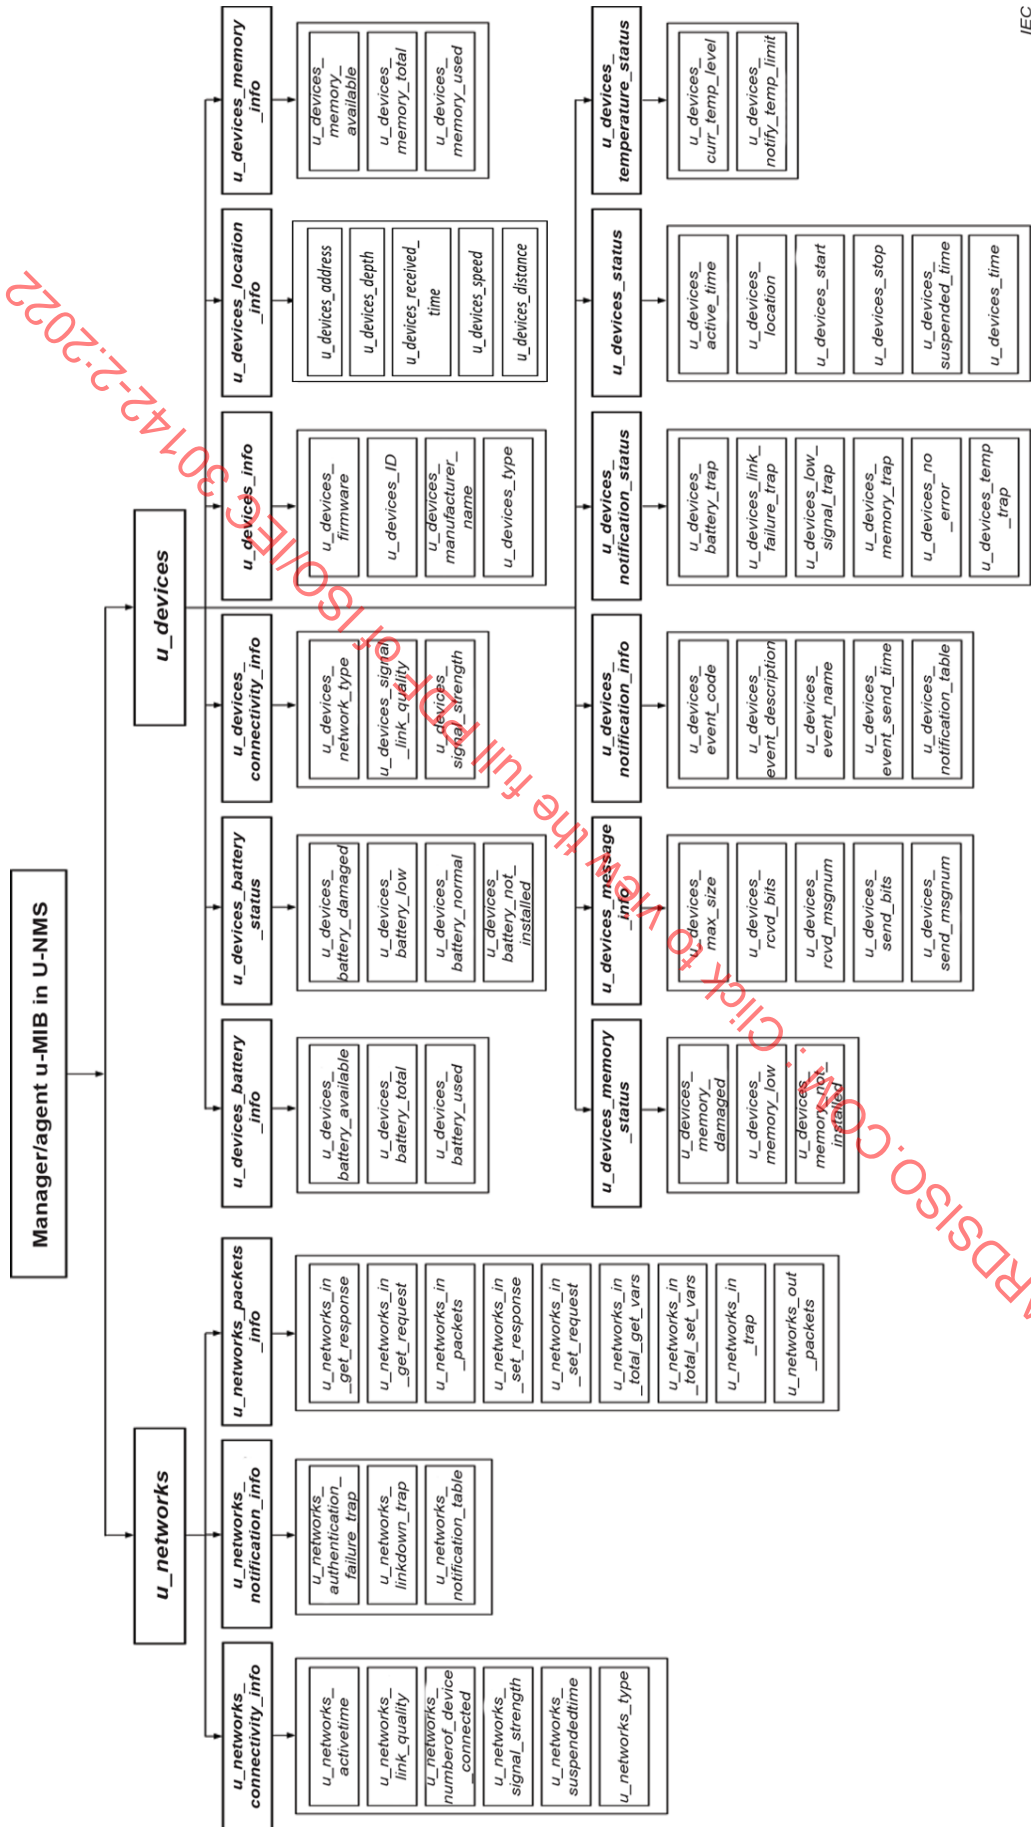


Figure 5 – MOs of the manager and agent u-MIB

Table 8 and Table 9 depict the classification of MOs under the *u_networks* and *u_devices*. For example, in *u_networks*, if the problem occurs in connectivity then the MO value of managed objects such as *u_networks_link_quality*, *u_networks_signal_strength*, *u_networks_suspendedtime*, etc. will be changed in u-MIB. Similarly, in the case of *u_devices*, if the problem occurs with connectivity or battery then the MO values of managed objects such as *u_devices_battery_trap*, *u_devices_link_failure_trap*, *u_devices_low_signal_trap*, etc. will be changed in u-MIB.

Table 8 – MOs of *u_networks*

Object Names	MOs	Data type	OID	Right to access	Description
<i>u_networks_connectivity_info</i>	<i>u_networks_active_time</i>	TIME	1.1.1.1	read-only	It indicates how long the device was active with the unique <i>u_networks_type</i> . For example, how long the device is connected with an acoustic-based network or RF-based network.
	<i>u_networks_link_quality</i>	FLOAT	1.1.1.2	read-only	It indicates the link quality between the devices in the acoustic-based network or RF-based network because the network connectivity depends on the link quality of <i>u_networks_type</i> .
	<i>u_networks_number_of_device_connected</i>	INTEGER	1.1.1.3	read-only	It indicates the number of underwater devices connected to the underwater network. For example, how many devices are connected under the acoustic-based network and how many devices are connected under the RF-based network.
	<i>u_networks_signal_strength</i>	FLOAT	1.1.1.4	read-only	It indicates the average received signal strength (RSS) of an acoustic-based network or RF-based network in decibels (dB).
	<i>u_networks_suspendedtime</i>	TIME	1.1.1.5	read-only	It indicates when the connectivity was broken under the unique <i>u_networks_type</i> . For example, when the device connectivity link was broken under the acoustic-based network or RF-based network.
	<i>u_networks_type</i>	STRING	1.1.1.6	read-only	It indicates the type of network connection with underwater devices such as acoustic-based network or RF-based network.
<i>u_networks_notification_info</i>	<i>u_networks_authentication_failure_trap</i>	INTEGER	1.1.2.1	read-only	It reports the failure when the message sent from the agent to the manager is not authenticated.
	<i>u_networks_linkdown_trap</i>	INTEGER	1.1.2.2	read-only	It reports the failure if the communication link of any underwater device went down.
	<i>u_networks_notification_table</i>	INTEGER	1.1.2.3	read-write	It updates and stores all the entries inside <i>u_networks_notification_info</i> .

Object Names	MOs	Data type	OID	Right to access	Description
<i>u_networks_packets_info</i>	<i>u_networks_in_get_response</i>	INTEGER	1.1.3.1	read-only	It reports the total number of Get Response accepted and processed by the underwater network management protocol.
	<i>u_networks_in_get_request</i>	INTEGER	1.1.3.2	read-only	It reports the total number of Get Request accepted and processed by the underwater network management protocol.
	<i>u_networks_in_packets</i>	INTEGER	1.1.3.3	read-only	It reports the total packets received via underwater networks.
	<i>u_networks_in_set_response</i>	INTEGER	1.1.3.4	read-only	It reports the total number of Set Response accepted and processed by the underwater network management protocol.
	<i>u_networks_in_set_request</i>	INTEGER	1.1.3.5	read-write	It reports the total number of Set Request accepted and processed by the underwater network management protocol.
	<i>u_networks_in_total_get_vars</i>	INTEGER	1.1.3.6	read-only	It reports the total number of MOs retrieved successfully using the Get Request method.
	<i>u_networks_in_total_set_vars</i>	INTEGER	1.1.3.7	read-write	It reports the total number of MOs altered successfully using Set Request method.
	<i>u_networks_in_trap</i>	INTEGER	1.1.3.8	read-only	It reports the total number of Trap received and processed by the underwater network management protocol.
	<i>u_networks_out_packets</i>	INTEGER	1.1.3.9	read-only	It reports the total packets transferred via underwater networks.

Table 9 – MOs of *u_devices*

Object Names	MOs	Data type	OID	Right to access	Description
<i>u_devices_battery_info</i>	<i>u_devices_battery_available</i>	INTEGER	1.2.1.1	read-only	It indicates the remaining power of the individual battery in underwater devices in milliampere hours (mAh).
	<i>u_devices_battery_total</i>	INTEGER	1.2.1.2	read-only	It indicates the total power of the individual battery in underwater devices in milliampere hours (mAh).
	<i>u_devices_battery_used</i>	INTEGER	1.2.1.3	read-only	It indicates the used power of the individual battery in underwater devices in milliampere hours (mAh).
<i>u_devices_battery_status</i>	<i>u_devices_battery_damaged</i>	INTEGER	1.2.2.1	read-only	It reports if there is some physical damage of batteries in underwater devices.
	<i>u_devices_battery_low</i>	INTEGER	1.2.2.2	read-only	It reports the battery charge is low. So, battery replacement or battery recharging is important in this situation.
	<i>u_devices_battery_normal</i>	INTEGER	1.2.2.3	read-only	It reports the battery has no problem, i.e. the battery working is normal for each underwater device.
	<i>u_devices_battery_not_installed</i>	INTEGER	1.2.2.4	read-only	It reports the battery is not installed in a particular underwater device, i.e. it indicates the battery in a particular underwater device got broken or damaged due to collision in the underwater environment.
<i>u_devices_connectivity_info</i>	<i>u_devices_network_type</i>	STRING	1.2.3.1	read-only	It indicates the type of network connection with underwater devices such as acoustic-based network or RF-based network.
	<i>u_devices_signal_link_quality</i>	INTEGER	1.2.3.2	read-only	It indicates the link quality between the devices in the acoustic-based networks or RF-based networks.
	<i>u_devices_signal_strength</i>	INTEGER	1.2.3.3	read-only	It indicates the average received signal strength (RSS) of acoustic-based networks or RF-based networks in decibels (dB).
<i>u_devices_info</i>	<i>u_devices_firmware</i>	STRING	1.2.4.1	read-write	It indicates the current firmware version of underwater devices.
	<i>u_devices_ID</i>	INTEGER	1.2.4.2	read-write	It indicates the identification number of underwater devices.
	<i>u_devices_manufacturer_name</i>	STRING	1.2.4.3	read-only	It indicates the manufacturer's name of underwater devices.
	<i>u_devices_type</i>	STRING	1.2.4.4	read-only	It indicates the type of underwater devices such as UUVs, UWA-GW, UWA-CH, UWA-SNode, etc.

Object Names	MOs	Data type	OID	Right to access	Description
<i>u_devices_location_info</i>	<i>u_devices_addresses</i>	STRING	1.2.5.1	read-write	It indicates the address of underwater devices.
	<i>u_devices_depth</i>	FLOAT	1.2.5.2	read-write	It indicates the depth between UWA-CH/UUV/UWA-SNode and UWA-GW to find the exact deployment depth of each node.
	<i>u_devices_received_time</i>	TIME	1.2.5.3	read-write	It indicates the received time or the reflected time of the acoustic signal in seconds to find the exact distance between the underwater devices.
	<i>u_devices_speed</i>	FLOAT	1.2.5.4	read-write	It indicates the speed of the transmitted signal.
	<i>u_devices_distance</i>	FLOAT	1.2.5.5	read-write	It indicates the distance between two nodes, such as UWA-CH/UUV/UWA-SNode and UWA-GW to find the exact location of each node.
<i>u_devices_memory_info</i>	<i>u_devices_memory_available</i>	INTEGER	1.2.6.1	read-only	It indicates the available memory space in underwater devices in megabytes (MB) or gigabytes (GB).
	<i>u_devices_memory_total</i>	INTEGER	1.2.6.2	read-only	It indicates the total memory space in underwater devices in megabytes (MB) or gigabytes (GB).
	<i>u_devices_memory_used</i>	INTEGER	1.2.6.3	read-only	It indicates the used memory space in underwater devices in megabytes (MB) or gigabytes (GB).
<i>u_devices_memory_status</i>	<i>u_devices_memory_damaged</i>	INTEGER	1.2.7.1	read-only	It reports the memory storage in underwater devices might be broken (some problem in memory).
	<i>u_devices_memory_low</i>	INTEGER	1.2.7.2	read-only	It reports the storage memory level is low in underwater devices. So, formatting is important in this situation.
	<i>u_devices_memory_not_installed</i>	INTEGER	1.2.7.3	read-only	It reports the memory was not installed or crashed in a particular underwater device.
<i>u_devices_message_info</i>	<i>u_devices_max_size</i>	INTEGER	1.2.8.1	read-only	It reports the maximum size of the data collected by the devices in bits.
	<i>u_devices_rcvd_bits</i>	INTEGER	1.2.8.2	read-only	It reports the size of the data received from the devices in bits.
	<i>u_devices_rcvd_msgnum</i>	INTEGER	1.2.8.3	read-only	It reports the total number of messages received from the devices through the network.
	<i>u_devices_send_bits</i>	INTEGER	1.2.8.4	read-only	It reports the size of the data sent from the devices in bits.
	<i>u_devices_send_msgnum</i>	INTEGER	1.2.8.5	read-only	It reports the total number of messages sent by the devices through the network.

Object Names	MOs	Data type	OID	Right to access	Description
<i>u_devices_notification_info</i>	<i>u_devices_event_code</i>	INTEGER	1.2.9.1	read-only	It indicates the unique code of each event in underwater devices.
	<i>u_devices_event_description</i>	INTEGER	1.2.9.2	read-only	It indicates a detailed description of the error event occurring in underwater devices.
	<i>u_devices_event_name</i>	INTEGER	1.2.9.3	read-only	It indicates the device's event name such as memory problem, battery problem, etc.
	<i>u_devices_event_send_time</i>	TIME	1.2.9.4	read-only	It indicates the last time the event was generated in underwater devices.
	<i>u_devices_notification_table</i>	INTEGER	1.2.9.5	read-only	It updates and stores all the entries inside <i>u_devices_notification_info</i> .
<i>u_devices_notification_status</i>	<i>u_devices_battery_trap</i>	INTEGER	1.2.10.1	read-only	It reports a low battery level in underwater devices.
	<i>u_devices_link_failure_trap</i>	INTEGER	1.2.10.2	read-only	It reports the connectivity problem between underwater devices.
	<i>u_devices_low_signal_trap</i>	INTEGER	1.2.10.3	read-only	It reports if the devices receive a low RSS value.
	<i>u_devices_memory_trap</i>	INTEGER	1.2.10.4	read-only	It reports out-of-memory space problems in underwater devices.
	<i>u_devices_no_error</i>	INTEGER	1.2.10.5	read-only	It reports no error in underwater devices.
	<i>u_devices_temperature_trap</i>	INTEGER	1.2.10.6	read-only	It reports if the temperature is increased and extends its threshold value. This increase in temperature can cause the failure of devices.
<i>u_devices_status</i>	<i>u_devices_active_time</i>	TIME	1.2.11.1	read-only	It reports the active connection time of a unique underwater device.
	<i>u_devices_location</i>	LOCATION	1.2.11.2	read-only	It reports the installed location of underwater devices.
	<i>u_devices_start</i>	BOOLEAN	1.2.11.3	read-only	It indicates that the device starts its working process and collects the device management resources such as battery level, memory level, etc.
	<i>u_devices_stop</i>	BOOLEAN	1.2.11.4	read-only	It indicates that the device stops its working process to collect the management resources from underwater devices.
	<i>u_devices_suspendedtime</i>	TIME	1.2.11.5	read-only	It reports the connection suspended time of a unique underwater device.
	<i>u_devices_time</i>	TIME	1.2.11.6	read-write	It reports the current time of underwater devices by increasing the time value in seconds.
<i>u_devices_temperature_status</i>	<i>u_devices_current_temperature_level</i>	INTEGER	1.2.12.1	read-only	It indicates the current temperature of underwater devices in Celsius.
	<i>u_devices_notify_temperature_limit</i>	INTEGER	1.2.12.2	read-only	It indicates the limit value of temperature in Celsius. It is useful when the temperature crosses its threshold in underwater devices.

7.4 MOs of u-MIB Trap

The subagent uses the *event_trap* object to report underwater system errors to the manager. If a critical error occurs, the subagent issues an *event_trap* that reports the failure of networks and devices to the manager. The subagent indicates the error by reporting the information such as device name, serial number, code, etc. as shown in Table 10.

Figure 6 shows the hierarchical format for designing of *event_trap* module.

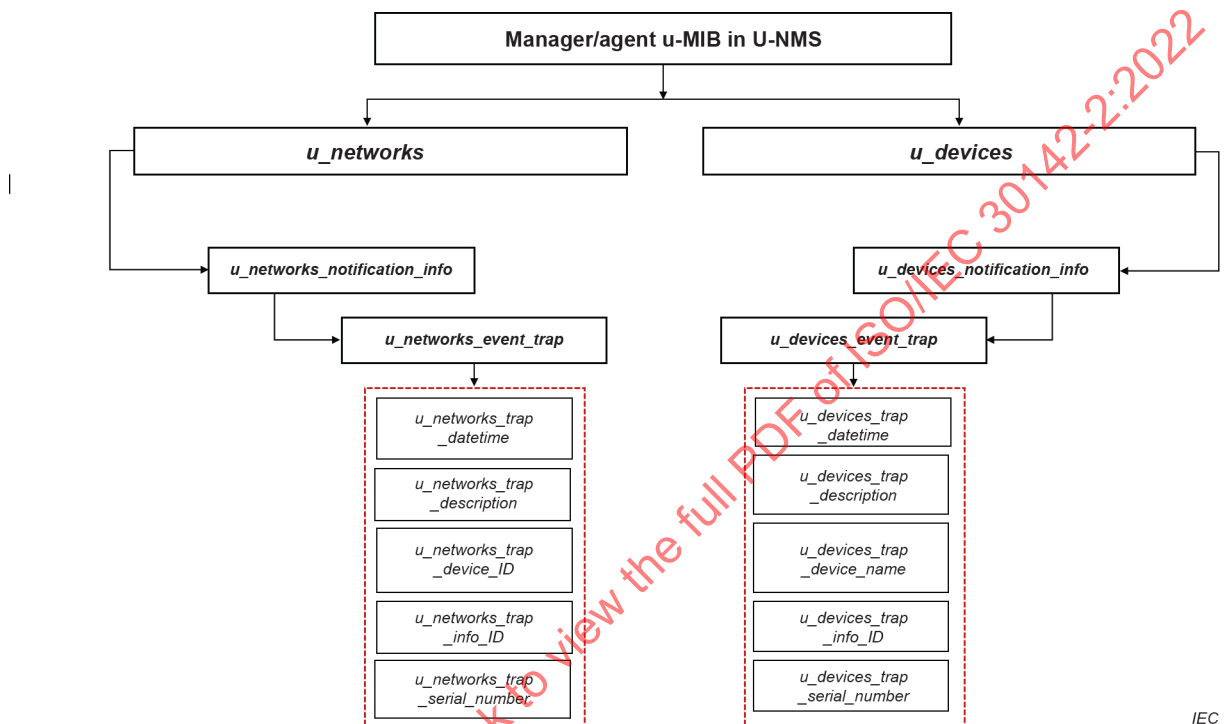


Figure 6 – Structure of *event_trap*

Table 10 – MOs of *u_trap* object in u-MIB

Name	Type	Description
<i>u_devices_trap_datetime</i>	TIME	It indicates the DAY, MONTH, YEAR, and TIME when the failure occurs.
<i>u_devices_trap_description</i>	STRING	It indicates the detailed reason for failure.
<i>u_devices_trap_device_ID</i>	STRING	It indicates the name of a device that sends a trap message.
<i>u_devices_trap_info_ID</i>	INTEGER (OBJECT IDENTIFIER)	It denotes the part where the failure occurs.
<i>u_devices_trap_serial_number</i>	STRING	It indicates the product number of devices that suffer a failure.

8 Integrating MOs of the manager and agent u-MIB

Figure 7 shows the integration of MOs in u-MIB. The u-MIB is integrated inside the components of U-NMS such as the manager, proxy agent, master agent, and subagent. The manager is integrated with manager u-MIB which consists of MOs such as *u_networks_numberof_devices_connected*, *u_networks_activetime*, etc. The proxy agent and master agent are integrated with agent u-MIB which consists of MOs such as *u_devices_ID*, *u_devices_manufacturer_name*, etc. and the subagent is integrated with *u_trap* MIB which consists of components such as *u_devices_trap_serial_number*, *u_devices_trap_device_ID*, *u_devices_datetime*, etc. The MOs from the agent can be accessed based on the request from the manager. The *u_trap* will send the notification message if any critical situation occurs in subagent devices.

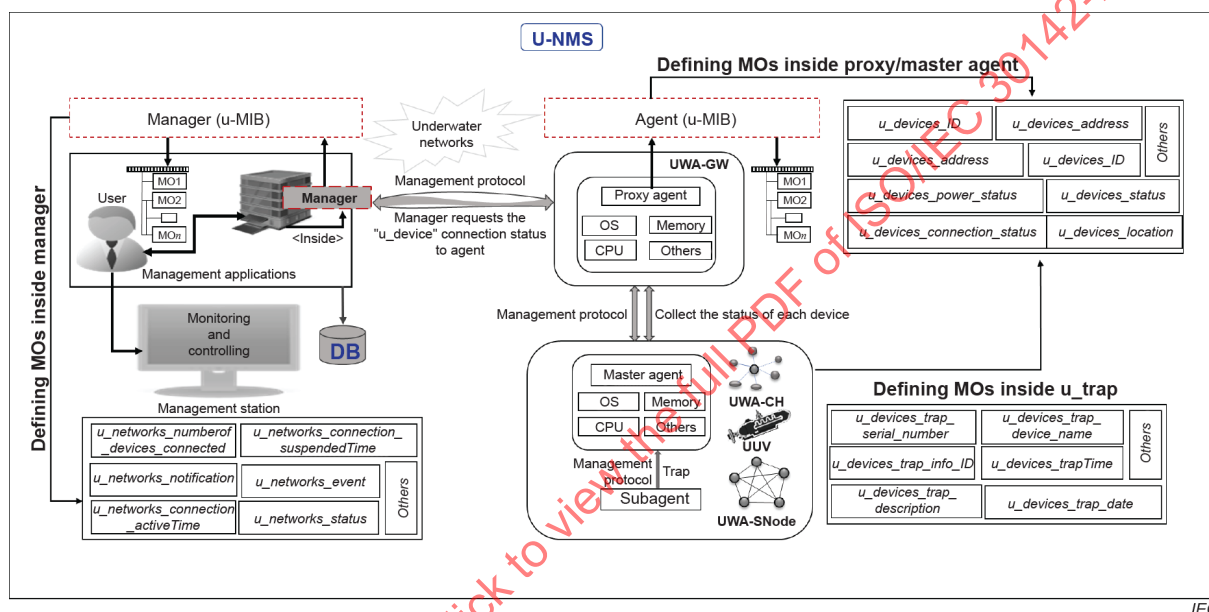


Figure 7 – Integration of MOs between manager and agent u-MIB

Figure 8 shows the process of exchanging MOs between underwater devices in U-NMS via the network management protocol. The system comprises the manager, proxy agent, master agent, and subagent. The proxy agent collects all information such as underwater device status, power status, memory status, connection status, etc. At the request of the manager, the proxy agent will send the response message to the manager. Using the response information, the manager can analyse and control the problems of underwater devices in U-NMS.

Figure 8 – MOs' requests via the network management protocol

Annex A (informative)

u-MIB Module

A.1 Example of creating u-MIB objects

Object resource information of *u_networks* is the collection of objects which describe the underwater networks entities. It contains the information about *u_networks_connectivity_info*, *u_networks_notification_info* and *u_networks_packets_info*. 'OBJECT IDENTIFIER::= {u-MIB}' indicates the hierarchy or complete path of OID is under u-MIB.

a) *u_networks_connectivity_info* OBJECT IDENTIFIER::= {u-MIB}

<i>u_networks_activetime</i>	OBJECT-NAME
------------------------------	-------------

DATA-TYPE	TIME
-----------	------

RIGHT-TO-ACCESS	read-only
-----------------	-----------

STATUS-INDICATOR	mandatory
------------------	-----------

OBJECT-DESCRIPTION	
--------------------	--

"It indicates how long the device was active with the unique *u_networks_type*. For example, how long the device connected with an acoustic-based network or RF-based network."

::= { *u_networks_connectivity_info* 1 }

<i>u_networks_signal_strength</i>	OBJECT-NAME
-----------------------------------	-------------

DATA-TYPE	INTEGER
-----------	---------

RIGHT-TO-ACCESS	read-only
-----------------	-----------

STATUS-INDICATOR	mandatory
------------------	-----------

OBJECT-DESCRIPTION	
--------------------	--

"It indicates the average received signal strength (RSS) of acoustic-based network or RF-based networks in decibels (dB)."

::= { *u_networks_connectivity_info* 4 }

<i>u_networks_type</i>	OBJECT-NAME
------------------------	-------------

DATA-TYPE	STRING
-----------	--------

RIGHT-TO-ACCESS	read-only
-----------------	-----------

STATUS-INDICATOR	mandatory
------------------	-----------

OBJECT-DESCRIPTION	
--------------------	--

"It indicates the type of network connection with underwater devices such as acoustic-based network or RF-based network. '1' indicates acoustic-based network and '2' indicates RF-based network."

::= { *u_networks_connectivity_info* 6 }

b) *u_networks_notification_info* OBJECT IDENTIFIER::= {u-MIB}

u_networks_authentication_failure_trap OBJECT-NAME

DATA-TYPE INTEGER

RIGHT-TO-ACCESS read-only

STATUS-INDICATOR mandatory

OBJECT-DESCRIPTION

"It reports the failure, when the message sent from the manager to the agent is not authenticated. Error code '2' indicates the manager is not authenticated."

::= { *u_networks_notification_info* 1 }

u_networks_linkdown_trap OBJECT-NAME

DATA-TYPE INTEGER

RIGHT-TO-ACCESS read-only

STATUS-INDICATOR mandatory

OBJECT-DESCRIPTION

"It reports the failure if the communication link of any underwater device went down. Error code '1' indicates the link failure in devices."

::= { *u_networks_notification_info* 2 }

u_networks_notification_table OBJECT-NAME

DATA-TYPE INTEGER

RIGHT-TO-ACCESS read-only

STATUS-INDICATOR mandatory

OBJECT-DESCRIPTION

"It updates and stores all the entries inside *u_networks_notification_info*."

::= { *u_networks_notification_info* 3 }

c) *u_networks_packets_info* OBJECT IDENTIFIER::= {u-MIB}

u_networks_in_packets OBJECT-NAME

DATA-TYPE INTEGER

RIGHT-TO-ACCESS read-only

STATUS-INDICATOR mandatory

OBJECT-DESCRIPTION

"It reports the total packets received via underwater networks."

::= { *u_networks_packets_info* 3 }