

INTERNATIONAL
STANDARD

ISO/IEC/
IEEE
8802-3

Second edition
2017-03-01

AMENDMENT 11
2019-02

**Information technology —
Telecommunications and information
exchange between systems — Local
and metropolitan area networks —
Specific requirements —**

**Part 3:
Standard for Ethernet**

**AMENDMENT 11: Physical layer and
management parameters for serial 25
Gb/s ethernet operation over single-
mode fiber**

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Réseaux locaux et métropolitains —
Prescriptions spécifiques —*

Partie 3: Norme pour Ethernet

*AMENDEMENT 11: Paramètres de couche physique et de gestion pour
le fonctionnement Ethernet en 25 Gb/s série sur fibre unimodale*



Reference number
ISO/IEC/IEEE 8802-3:2017/Amd.11:2019(E)

© IEEE 2018



COPYRIGHT PROTECTED DOCUMENT

© IEEE 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO or IEEE at the respective address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Institute of Electrical and Electronics Engineers, Inc
3 Park Avenue, New York
NY 10016-5997, USA

Email: stds.ipr@ieee.org
Website: www.ieee.org

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted (see www.iso.org/directives).

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

ISO/IEC/IEEE 8802-3:2017/Amd.11 was prepared by the LAN/MAN of the IEEE Computer Society (as IEEE Std 802.3cc-2017) and drafted in accordance with its editorial rules. It was adopted, under the "fast-track procedure" defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC6, *Telecommunications and information exchange between systems*.

A list of all parts in the ISO/IEC/IEEE 8802 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-3:2017/AMD11:2019

IEEE Std 802.3cc™-2017

(Amendment to

IEEE Std 802.3™-2015

as amended by

IEEE Std 802.3bw™-2015, IEEE Std 802.3by™-2016,

IEEE Std 802.3bq™-2016, IEEE Std 802.3bp™-2016,

IEEE Std 802.3br™-2016, IEEE Std 802.3bn™-2016,

IEEE Std 802.3bz™-2016, IEEE Std 802.3bu™-2016,

IEEE Std 802.3bv™-2017, IEEE Std 802.3-2015/Cor 1-2017,

and IEEE Std 802.3bs™-2017)

IEEE Standard for Ethernet

Amendment 11: Physical Layer and Management Parameters for Serial 25 Gb/s Ethernet Operation Over Single-Mode Fiber

LAN/MAN Standards Committee
of the
IEEE Computer Society

Approved 6 December 2017

IEEE-SA Standards Board

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 802-3:2017/AMD11:2019

Abstract: This amendment to IEEE Std 802.3-2015 adds Physical Layer (PHY) specifications and management parameters for 25 Gb/s operation over single-mode fiber at reaches of at least 10 km (25GBASE-LR) and 40 km (25GBASE-ER).

Keywords: 25 Gb/s Ethernet, 25GBASE-ER, 25GBASE-LR, 25GBASE-SR, Energy Efficient Ethernet (EEE), Ethernet, Forward Error Correction (FEC), IEEE 802.3™, IEEE 802.3by™, IEEE 802.3cc™, Physical Coding sublayer (PCS), Physical Medium Attachment (PMA) sublayer, Physical Medium Dependent (PMD) sublayer, Reconciliation sublayer (RS), single-mode fiber (SMF)

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2018 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 15 January 2018. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

PDF: ISBN 978-1-5044-4547-4 STD22910
Print: ISBN 978-1-5044-4548-1 STDPD22910

IEEE prohibits discrimination, harassment and bullying. For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notices and Disclaimers Concerning IEEE Standards Documents.” They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/IPR/disclaimers.html>.

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE-SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. IEEE Standards are documents developed through scientific, academic, and industry-based technical working groups. Volunteers in IEEE working groups are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE Standards do not guarantee or ensure safety, security, health, or environmental protection, or ensure against interference with or from other devices or networks. Implementers and users of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854 USA

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under U.S. and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE Xplore at <http://ieeexplore.ieee.org/> or contact IEEE at the address listed previously. For more information about the IEEE-SA or IEEE's standards development process, visit the IEEE-SA Website at <http://standards.ieee.org>.

Errata

Errata, if any, for all IEEE standards can be accessed on the IEEE-SA Website at the following URL: <http://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE-SA Website at <http://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Participants

The following individuals were officers and members of the IEEE 802.3 working group at the beginning of the IEEE P802.3cc working group ballot. Individuals may have not voted or may have voted for approval, disapproval, or abstention on this amendment.

David J. Law, *IEEE 802.3 Working Group Chair*
Adam Healey, *IEEE 802.3 Working Group Vice-Chair*

Pete Anslow, *IEEE 802.3 Working Group Secretary*

Steven B. Carlson, *IEEE 802.3 Working Group Executive Secretary*

Valerie Maguire, *IEEE 802.3 Working Group Treasurer*

David Lewis, *IEEE P802.3cc 25 Gb/s Ethernet over Single-Mode Fiber Task Force Chair*

Kohichi R. Tamura, *IEEE P802.3cc 25 Gb/s Ethernet over Single-Mode Fiber Task Force Editor-in-Chief*

Justin Abbott	John Dillard	Chad Jones
David Abramson	Chris Diminico	Peter Jones
Shadi Abughazaleh	Curtis Donahue	Manabu Kagami
Mohammad Ahmed	Dan Dove	Upen Kareti
Dale Amason	Mike Dudek	Keisuke Kawahara
Eric Baden	Frank Effenberger	Yasuaki Kawatsu
Amrik Bains	Hesham Elbakoury	Michael Kelsen
Denis Beaudoin	David Estes	Yong Kim
Christian Beia	John Ewen	Eric Kimber
Vipul Bhatt	Ramin Farjad	Scott Kipp
William Bliss	Shahar Feldman	Michael Klempa
Brad Booth	James Fife	Curtis Knittle
Martin Bouda	Alan Flatman	Shigeru Kobayashi
David Brandt	Matthias Fritzsche	Paul Kolesar
Ralf-Peter Braun	Richard Frosch	Tom Kolze
Theodore Brillhart	Andrew Gardner	Glen Kramer
Paul Brooks	Claude Gauthier	Toshihiko Kusano
Alan Brown	Ali Ghiasi	Hans Lackner
Matthew Brown	Volker Goetzfried	Mark Laubach
Phillip Brownlee	Zhigang Gong	Greg Le Cheminant
Chris Bullock	Steven Gorshe	Han Hyub Lee
Jairo Bustos Heredia	Robert Grow	Jon Lewis
Adrian Butter	Yong Guo	Mike Peng Li
Francesco Caggioni	Mark Gustlin	Jane Lim
Anthony Calbone	Marek Hajduczenia	Dekun Liu
Clark Carty	Takehiro Hayashi	Hai-Feng Liu
Craig Chabot	Rajmohan Hegde	Zhenyu Liu
Geoffrey Chacon Simon	David Hess	William Lo
Mandeep Chadha	Yasuo Hidaka	Moiz Lokhandwala
David Chalupsky	David Hoglund	Miklos Lukacs
Jacky Chang	Rita Horner	Kent Lusted
Xin Chang	Bernd Hormmeyer	Jeffery Maki
Weiying Cheng	Xi Huang	David Malicoat
Ahmad Chini	Yasuhiro Hyakutake	Arthur Marris
Keng Hua Chuang	Jonathan Ingham	Takeo Masuda
Christopher R. Cole	Kazuhiko Ishibe	Kirsten Matheus
John D'Ambrosia	Hideki Isono	Erdem Matoglu
Yair Darshan	Tom Issenhuth	Naoki Matsuda
Piers Dawe	Kenneth Jackson	Mick McCarthy
Fred Dawson	Andrew Jimenez	Brett McClellan
Eric DiBiaso	John Johnson	Thomas Mcdermott

John McDonough
 Larry McMillan
 Richard Mellitz
 Phil Miguelez
 Bryan Moffitt
 Paul Mooney
 Ron Muir
 Dale Murray
 Henry Muyschondt
 James Nadolny
 Edward Nakamoto
 Gary Nicholl
 Kevin Noll
 Mark Nowell
 David Ofelt
 Tom Palkert
 Sesha Panguluri
 Earl Parsons
 Vasu Parthasarathy
 Gerald Pepper
 Ruben Perez De Aranda Alonso
 Michael Peters
 Phong Pham
 Jean Picard
 William Powell
 Rick Rabinovich
 Adele Ran
 Alon Regev
 Duane Remein
 Victor Renteria
 Salvatore Rotolo
 Toshiaki Sakai

Jorge Salinger
 Sam Sambasivan
 Dieter Schicketanz
 Fred Schindler
 Hossein Sedarat
 Naoshi Serizawa
 Masood Shariff
 Kapil Shrikhande
 Tom Skaar
 Jeff Slavick
 Daniel Smith
 Scott Sommers
 Yoshiaki Sone
 Bryan Sparrowhawk
 Atul Srivastava
 Peter Stassar
 Heath Stewart
 Robert Stone
 David Stover
 Ken-Ichi Suzuki
 Steve Swanson
 Andre Szczepanek
 William Szeto
 Bharat Tailor
 Takayuki Tajima
 Tomoo Takahara
 Satoshi Takahashi
 Geoffrey Thompson
 Pirooz Tooyserkani
 Nathan Tracy
 Matthew Traverso
 David Tremblay

Albert Tretter
 Stephen Trowbridge
 Yoshihiro Tsukamoto
 Ed Ulrichs
 Alexander Umnov
 Sterling A. Vaden
 Stefano Valle
 Paul Vanderlaan
 Robert Wagner
 Dylan Walker
 Haifei Wang
 Roy Wang
 Tongtong Wang
 Xinyuan Wang
 Matthias Wendt
 Oded Wertheim
 Natalie Wienckowski
 Ludwig Winkel
 Peter Wu
 Dayin Xu
 Yu Xu
 Lennart Yseboodt
 Hayato Yuki
 Andrew Zambell
 Qiwen Zhong
 Yan Zhuang
 George Zimmerman
 Helge Zinner
 Pavel Zivny

The following members of the individual balloting committee voted on this amendment. Balloters may have voted for approval, disapproval, or abstention.

Shadi Abughazaleh	Werner Hoelzl	Satoshi Obara
Thomas Alexander	Rita Horner	Bansi Patel
Pete Anslow	C Huntley	Arumugam Paventhan
Butch Anton	Noriyuki Ikeuchi	Michael Peters
Amrik Bains	Osamu Ishida	David Piehler
Ralf-Peter Braun	Atsushi Ito	Rick Pimpinella
Nancy Bravin	Raj Jain	R. K. Rannow
Theodore Brillhart	SangKwon Jeong	Alon Regev
Matthew Brown	Peter Jones	Maximilian Riegel
Demetrio Jr Bucaneg	Manabu Kagami	Robert Robinson
Jairo Bustos Heredia	Piotr Karocki	Benjamin Rolfe
William Byrd	Stuart Kerry	Daniel Smith
Steven B. Carlson	Yongbum Kim	Thomas Starai
Juan Carreon	Jonathan King	Peter Stassar
Mandeep Chadha	Paul Kolesar	Walter Struppler
Keith Chow	Mark Laubach	Mitsutoshi Sugawara
Keng Hua Chuang	David J. Law	Patricia Thaler
Charles Cook	David Lewis	Geoffrey Thompson
Piers J. G. Dawe	Jon Lewis	Steven Tilden
Stephen Didde	Elvis Maculuba	David Tremblay
Michael Dudek	Valerie Maguire	Mark-Rene Uchida
Sourav Dutta	Jeffery Maki	Alexander Umnov
Matthias Fritsche	Arthur Marris	Paul Vanderlaan
Yukihiro Fujimoto	Mick McCarthy	Lorenzo Vangelista
Joel Goergen	Brett McClellan	George Vlantis
Zhigang Gong	Thomas McDermott	Khurram Waheed
Eric W Gray	Richard Mellitz	Lisa Ward
Randall Groves	Jeffrey Moore	Andreas Wolf
Robert Grow	Charles Moorwood	Chun Yu Charles Wong
Michael Gundlach	Michael Newman	Peter Wu
Adam Healey	Nick S.A. Nikjoo	Jun Xu
Marco Hernandez	Paul Nikolich	Oren Yuen
David Hess	Mark Nowell	Zhen Zhou

When the IEEE-SA Standards Board approved this amendment on 6 December 2017, it had the following membership:

Jean-Philippe Faure, Chair
Gary Hoffman, Vice Chair
John D. Kulick, Past Chair
Konstantinos Karachalios, Secretary

Chuck Adams	Thomas Kochy	Robby Robson
Masayuki Ariyoshi	Joseph L. Koepfinger*	Dorothy Stanley
Ted Burse	Kevin Lu	Adrian Stephens
Stephen Dukes	Daleep Mohla	Mehmet Ulema
Doug Edwards	Damir Novosel	Phil Wennblom
J. Travis Griffith	Ronald C. Petersen	Howard Wolfman
Michael Janezic	Annette D. Reilly	Yu Yuan

*Member Emeritus

Introduction

This introduction is not part of IEEE Std 802.3cc-2017, IEEE Standard for Ethernet—Amendment 11: Physical Layer and Management Parameters for Serial 25 Gb/s Ethernet Operation Over Single-Mode Fiber.

IEEE Std 802.3™ was first published in 1985. Since the initial publication, many projects have added functionality or provided maintenance updates to the specifications and text included in the standard. Each IEEE 802.3 project/amendment is identified with a suffix (e.g., IEEE Std 802.3ba™-2010).

The half duplex Media Access Control (MAC) protocol specified in IEEE Std 802.3-1985 is Carrier Sense Multiple Access with Collision Detection (CSMA/CD). This MAC protocol was key to the experimental Ethernet developed at Xerox Palo Alto Research Center, which had a 2.94 Mb/s data rate. Ethernet at 10 Mb/s was jointly released as a public specification by Digital Equipment Corporation (DEC), Intel and Xerox in 1980. Ethernet at 10 Mb/s was approved as an IEEE standard by the IEEE Standards Board in 1983 and subsequently published in 1985 as IEEE Std 802.3-1985. Since 1985, new media options, new speeds of operation, and new capabilities have been added to IEEE Std 802.3. A full duplex MAC protocol was added in 1997.

Some of the major additions to IEEE Std 802.3 are identified in the marketplace with their project number. This is most common for projects adding higher speeds of operation or new protocols. For example, IEEE Std 802.3u™ added 100 Mb/s operation (also called Fast Ethernet), IEEE Std 802.3z added 1000 Mb/s operation (also called Gigabit Ethernet), IEEE Std 802.3ae added 10 Gb/s operation (also called 10 Gigabit Ethernet), IEEE Std 802.3ah™ specified access network Ethernet (also called Ethernet in the First Mile) and IEEE Std 802.3ba added 40 Gb/s operation (also called 40 Gigabit Ethernet) and 100 Gb/s operation (also called 100 Gigabit Ethernet). These major additions are all now included in and are superseded by IEEE Std 802.3-2015 and are not maintained as separate documents.

At the publication date of IEEE Std 802.3cc-2017, IEEE Std 802.3 is composed of the following documents:

IEEE Std 802.3-2015

Section One—Includes Clause 1 through Clause 20 and Annex A through Annex H and Annex 4A. Section One includes the specifications for 10 Mb/s operation and the MAC, frame formats and service interfaces used for all speeds of operation.

Section Two—Includes Clause 21 through Clause 33 and Annex 22A through Annex 33E. Section Two includes management attributes for multiple protocols and speed of operation as well as specifications for providing power over twisted pair cabling for multiple operational speeds. It also includes general information on 100 Mb/s operation as well as most of the 100 Mb/s Physical Layer specifications.

Section Three—Includes Clause 34 through Clause 43 and Annex 36A through Annex 43C. Section Three includes general information on 1000 Mb/s operation as well as most of the 1000 Mb/s Physical Layer specifications.

Section Four—Includes Clause 44 through Clause 55 and Annex 44A through Annex 55B. Section Four includes general information on 10 Gb/s operation as well as most of the 10 Gb/s Physical Layer specifications.

Section Five—Includes Clause 56 through Clause 77 and Annex 57A through Annex 76A. Clause 56 through Clause 67 and Clause 75 through Clause 77, as well as associated annexes, specify subscriber access and other Physical Layers and sublayers for operation from 512 kb/s to 10 Gb/s, and defines services and protocol elements that enable the exchange of IEEE Std 802.3 format frames between

stations in a subscriber access network. Clause 68 specifies a 10 Gb/s Physical Layer specification. Clause 69 through Clause 74 and associated annexes specify Ethernet operation over electrical backplanes at speeds of 1000 Mb/s and 10 Gb/s.

Section Six—Includes Clause 78 through Clause 95 and Annex 83A through Annex 93C. Clause 78 specifies Energy-Efficient Ethernet. Clause 79 specifies IEEE 802.3 Organizationally Specific Link Layer Discovery Protocol (LLDP) type, length, and value (TLV) information elements. Clause 80 through Clause 95 and associated annexes includes general information on 40 Gb/s and 100 Gb/s operation as well the 40 Gb/s and 100 Gb/s Physical Layer specifications. Clause 90 specifies Ethernet support for time synchronization protocols.

IEEE Std 802.3bw™-2015

Amendment 1—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 96. This amendment adds 100 Mb/s Physical Layer (PHY) specifications and management parameters for operation on a single balanced twisted-pair copper cable.

IEEE Std 802.3by™-2016

Amendment 2—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 105 through Clause 112, Annex 109A, Annex 109B, Annex 109C, Annex 110A, Annex 110B, and Annex 110C. This amendment adds MAC parameters, Physical Layers, and management parameters for the transfer of IEEE 802.3 format frames at 25 Gb/s.

IEEE Std 802.3bq™-2016

Amendment 3—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 113 and Annex 113A. This amendment adds new Physical Layers for 25 Gb/s and 40 Gb/s operation over balanced twisted-pair structured cabling systems.

IEEE Std 802.3bp™-2016

Amendment 4—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 97 and Clause 98. This amendment adds point-to-point 1 Gb/s Physical Layer (PHY) specifications and management parameters for operation on a single balanced twisted-pair copper cable in automotive and other applications not utilizing the structured wiring plant.

IEEE Std 802.3br™-2016

Amendment 5—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 99. This amendment adds a MAC Merge sublayer and a MAC Merge Service Interface to support for Interspersing Express Traffic over a single link.

IEEE Std 802.3bn™-2016

Amendment 6—This amendment adds the Physical Layer specifications and management parameters for symmetric and/or asymmetric operation of up to 10 Gb/s on point-to-multipoint Radio Frequency (RF) distribution plants comprising either amplified or passive coaxial media. It also extends the operation of Ethernet Passive Optical Networks (EPON) protocols, such as Multipoint Control Protocol (MPCP) and Operation Administration and Management (OAM).

IEEE Std 802.3bz™-2016

Amendment 7—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 125 and Clause 126. This amendment adds new rates of 2.5 Gb/s and 5 Gb/s and new Physical Layers for operation at 2.5 Gb/s and 5 Gb/s over balanced twisted-pair structured cabling systems.

IEEE Std 802.3bu™-2016

Amendment 8—This amendment includes changes to IEEE Std 802.3-2015 to define a methodology for the provision of power via a single twisted pair to connected Data Terminal Equipment (DTE) with IEEE 802.3 single twisted-pair interfaces.

IEEE Std 802.3bv™-2017

Amendment 9—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 115 and Annex 115A. This amendment adds point-to-point 1000 Mb/s Physical Layer (PHY) specifications and management parameters for operation on duplex plastic optical fiber (POF) targeting use in automotive, industrial, home-network, and other applications.

IEEE Std 802.3™-2015/Cor 1-2017

This corrigendum clarifies which lane of the media dependent interface (MDI) of a multi-lane Physical Layer entity (PHY) is used as the timestamping reference point.

IEEE Std 802.3bs™-2017

Amendment 10—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 116 through Clause 124 and Annex 119A through Annex 120E. This amendment adds MAC parameters, Physical Layers, and management parameters for the transfer of IEEE 802.3 format frames at 200 Gb/s and 400 Gb/s.

IEEE Std 802.3cc™-2017

Amendment 11—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 114. This amendment adds 25 Gb/s Physical Layer specifications and management parameters for operation over single-mode fiber.

A companion document IEEE Std 802.3.1 describes Ethernet management information base (MIB) modules for use with the Simple Network Management Protocol (SNMP). IEEE Std 802.3.1 is updated to add management capability for enhancements to IEEE Std 802.3 after approval of the enhancements.

IEEE Std 802.3 will continue to evolve. New Ethernet capabilities are anticipated to be added within the next few years as amendments to this standard.

Contents

1.	Introduction.....	15
1.4	Definitions	15
30.	Management.....	16
30.5	Layer management for medium attachment units (MAUs).....	16
30.5.1	MAU managed object class	16
30.5.1.1	MAU attributes	16
30.5.1.1.2a	MAUType	16
45.	Management Data Input/Output (MDIO) Interface.....	17
45.2	MDIO Interface Registers.....	17
45.2.1	PMA/PMD registers	17
45.2.1.6	PMA/PMD control 2 register (Register 1.7).....	17
45.2.1.7	PMA/PMD status 2 register (Register 1.8).....	17
45.2.1.7.4	Transmit fault (1.8.11).....	17
45.2.1.7.5	Receive fault (1.8.10).....	17
45.2.1.8	PMD transmit disable register (Register 1.9).....	18
45.2.1.14b	25G PMA/PMD extended ability register (Register 1.19)	18
45.2.1.14b.aa	25GBASE-ER ability (1.19.7)	18
45.2.1.14b.ab	25GBASE-LR ability (1.19.6)	18
78.	Energy-Efficient Ethernet (EEE).....	19
78.1	Overview.....	19
78.1.4	PHY types optionally supporting EEE	19
105.	Introduction to 25 Gb/s networks.....	20
105.1	Overview.....	20
105.1.1	Scope.....	20
105.1.2	Relationship of 25 Gigabit Ethernet to the ISO OSI reference model.....	20
105.1.3	Nomenclature.....	20
105.2	Physical Layer signaling systems	21
105.3	Summary of 25 Gigabit Ethernet sublayers.....	22
105.3.5	Physical Medium Dependent (PMD) sublayer	22
105.5	Delay constraints.....	22
105.7	Protocol implementation conformance statement (PICS) proforma.....	22
108.	Reed-Solomon Forward Error Correction (RS-FEC) sublayer for 25GBASE-R PHYs	23
108.5	Functions within the 25GBASE-R RS-FEC sublayer	23
108.5.3	Receive function	23
108.5.3.2	Reed-Solomon decoder.....	23
108.7	Protocol implementation conformance statement (PICS) proforma for Clause 108, Reed-Solomon Forward Error Correction (RS-FEC) sublayer for 25GBASE-R PHYs	24
108.7.3	Major capabilities/options.....	24
108.7.4	PICS proforma tables for Reed-Solomon Forward Error Correction (RS-FEC) sublayer for 25GBASE-R PHYs.....	24

108.7.4.2 Receive function	24
114. Physical Medium Dependent (PMD) sublayer and medium, types 25GBASE-LR and 25GBASE-ER	25
114.1 Overview	25
114.1.1 Bit error ratio	26
114.2 Physical Medium Dependent (PMD) service interface	26
114.3 Delay constraints	26
114.4 PMD MDIO function mapping	27
114.5 PMD functional specifications	27
114.5.1 PMD block diagram	27
114.5.2 PMD transmit function	28
114.5.3 PMD receive function	28
114.5.4 PMD global signal detect function	28
114.5.5 PMD reset function	29
114.5.6 PMD global transmit disable function (optional)	29
114.5.7 PMD fault function (optional)	29
114.5.8 PMD transmit fault function (optional)	29
114.5.9 PMD receive fault function (optional)	29
114.6 PMD to MDI optical specifications for 25GBASE-LR and 25GBASE-ER	30
114.6.1 25GBASE-LR and 25GBASE-ER transmitter optical specifications	30
114.6.2 25GBASE-LR and 25GBASE-ER receive optical specifications	32
114.6.3 25GBASE-LR and 25GBASE-ER illustrative link power budgets	33
114.7 Definition of optical parameters and measurement methods	33
114.7.1 Test patterns for optical parameters	33
114.7.2 Wavelength	33
114.7.3 Average optical power	34
114.7.4 Optical Modulation Amplitude (OMA)	34
114.7.5 Transmitter and dispersion penalty (TDP)	34
114.7.5.1 Reference transmitter requirements	34
114.7.5.2 Channel requirements	35
114.7.5.3 Reference receiver requirements	35
114.7.5.4 Test procedure	35
114.7.6 Extinction ratio	35
114.7.7 Relative Intensity Noise (RIN ₂₀ OMA)	35
114.7.8 Transmitter optical waveform (transmit eye)	35
114.7.9 Receiver sensitivity	36
114.7.10 Stressed receiver sensitivity	36
114.8 Safety, installation, environment, and labeling	36
114.9 Fiber optic cabling model	36
114.10 Characteristics of the fiber optic cabling (channel)	37
114.11 Requirements for interoperability between 25GBASE-LR and 25GBASE-ER	38
114.12 Protocol implementation conformance statement (PICS) proforma for Clause 114, Physical Medium Dependent (PMD) sublayer and medium, types 25GBASE-LR and 25GBASE-ER	39
114.12.1 Introduction	39
114.12.2 Identification	39
114.12.2.1 Implementation identification	39
114.12.2.2 Protocol summary	39
114.12.3 Major capabilities/options	40

114.12.4 PICS proforma tables for Physical Medium Dependent (PMD) sublayer and medium, types 25GBASE-LR and 25GBASE-ER	41
114.12.4.1 PMD functional specifications.....	41
114.12.4.2 Management functions.....	42
114.12.4.3 PMD to MDI optical specifications for 25GBASE-LR.....	42
114.12.4.4 PMD to MDI optical specifications for 25GBASE-ER.....	42
114.12.4.5 Optical measurement methods.....	43
114.12.4.6 Environmental specifications.....	43
114.12.4.7 Characteristics of the fiber optic cabling and MDI.....	43

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-3:2017/AMD11:2019

IEEE Standard for Ethernet

Amendment 11: Physical Layer and Management Parameters for Serial 25 Gb/s Ethernet Operation Over Single-Mode Fiber

NOTE—The editing instructions contained in this amendment define how to merge the material contained therein into the existing base standard and its amendments to form the comprehensive standard.

The editing instructions are shown in ***bold italic***. Four editing instructions are used: change, delete, insert, and replace. ***Change*** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed by using ~~strike through~~ (to remove old material) and underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Deletions and insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. ***Replace*** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.

Cross references that refer to clauses, tables, equations, or figures not covered by this amendment are highlighted in green.

1. Introduction

1.4 Definitions

Insert the following new definition after 1.4.64c 25GBASE-CR-S (as inserted by IEEE Std 802.3by-2016):

1.4.64c1 25GBASE-ER: IEEE 802.3 Physical Layer specification for 25 Gb/s using 25GBASE-R encoding over single-mode fiber, with reach up to at least 40 km. (See IEEE Std 802.3, Clause 114.)

Insert the following new definition after 1.4.64e 25GBASE-KR-S (as inserted by IEEE Std 802.3by-2016):

1.4.64e1 25GBASE-LR: IEEE 802.3 Physical Layer specification for 25 Gb/s using 25GBASE-R encoding over single-mode fiber, with reach up to at least 10 km. (See IEEE Std 802.3, Clause 114.)

Insert the following new definition after 1.4.178 defect:

1.4.178a differential group delay (DGD): The time difference at reception between the fractions of a pulse that were transmitted in the two principal states of polarization of an optical signal.

30. Management

30.5 Layer management for medium attachment units (MAUs)

30.5.1 MAU managed object class

30.5.1.1 MAU attributes

30.5.1.1.2 aMAUType

Insert the following new entries in “APPROPRIATE SYNTAX” after the entry for 25GBASE-SR (as inserted by IEEE Std 802.3by-2016) and before the entry for 25GBASE-T (as inserted by IEEE Std 802.3bq-2016):

APPROPRIATE SYNTAX:

...	
25GBASE-LR	25GBASE-R PCS/PMA over single-mode fiber PMD, with long reach, as specified in Clause 114
25GBASE-ER	25GBASE-R PCS/PMA over single-mode fiber PMD, with extended reach, as specified in Clause 114
...	

45. Management Data Input/Output (MDIO) Interface

45.2 MDIO Interface Registers

45.2.1 PMA/PMD registers

45.2.1.6 PMA/PMD control 2 register (Register 1.7)

Change two reserved rows in Table 45–7 (as modified by IEEE Std 802.3bq-2016, IEEE Std 802.3by-2017, and IEEE Std 802.3bs) as follows (unchanged rows not shown):

Table 45–7—PMA/PMD control 2 register bit definitions

Bit(s)	Name	Description	R/W ^a
1.7.6:0	PMA/PMD type selection	6 5 4 3 2 1 0 0 1 1 0 1 1 0 = 25GBASE-ER PMA/PMD 0 1 1 0 1 0 1 = 25GBASE-LR PMA/PMD 0 1 1 0 1 1 0 = reserved 0 1 1 0 1 0 1 = reserved	R/W

^aR/W = Read/Write, RO = Read only

45.2.1.7 PMA/PMD status 2 register (Register 1.8)

45.2.1.7.4 Transmit fault (1.8.11)

Insert the following row after “25GBASE-SR” in Table 45–9 (as modified by IEEE Std 802.3by-2016) and before 25GBASE-T (as inserted by IEEE Std 802.3bq-2016) as follows (unchanged rows not shown):

Table 45–9—Transmit fault description location

PMA/PMD	Description location
25GBASE-LR, 25GBASE-ER	114.5.8

45.2.1.7.5 Receive fault (1.8.10)

Insert the following row after “25GBASE-SR” in Table 45–10 (as modified by IEEE Std 802.3by-2016) and before 25GBASE-T (as inserted by IEEE Std 802.3bq-2016) as follows (unchanged rows not shown):

Table 45–10—Receive fault description location

PMA/PMD	Description location
25GBASE-LR, 25GBASE-ER	114.5.9

45.2.1.8 PMD transmit disable register (Register 1.9)

Insert the following row after “25GBASE-SR” in Table 45–12 (as modified by IEEE Std 802.3by-2016) and before 25GBASE-T (as inserted by IEEE Std 802.3bq-2016) as follows (unchanged rows not shown):

Table 45–12—Transmit disable description location

PMA/PMD	Description location
25GBASE-LR and 25GBASE-ER	114.5.6

45.2.1.14b 25G PMA/PMD extended ability register (Register 1.19)

Change the reserved row of Table 45-17b (as modified by IEEE Std 802.3bq-2016) and insert two new rows immediately below it as follows (unchanged rows not shown):

Table 45–17b—25G PMA/PMD extended ability register bit definitions

Bit(s)	Name	Description	R/W ^a
1.19.15:6 1.19.15:8	Reserved	Value always 0	RO
1.19.7	25GBASE-ER ability	1 = PMA/PMD is able to perform 25GBASE-ER 0 = PMA/PMD is not able to perform 25GBASE-ER	RO
1.19.6	25GBASE-LR ability	1 = PMA/PMD is able to perform 25GBASE-LR 0 = PMA/PMD is not able to perform 25GBASE-LR	RO

^aRO = Read only

Insert 45.2.1.14b.aa and 45.2.1.14b.ab before 45.2.1.14b.a (as inserted by IEEE Std 802.3bq-2016) as follows:

45.2.1.14b.aa 25GBASE-ER ability (1.19.7)

When read as a one, bit 1.19.7 indicates that the PMA/PMD is able to operate as a 25GBASE-ER PMA/PMD type. When read as a zero, bit 1.19.7 indicates that the PMA/PMD is not able to operate as a 25GBASE-ER PMA/PMD type.

45.2.1.14b.ab 25GBASE-LR ability (1.19.6)

When read as a one, bit 1.19.6 indicates that the PMA/PMD is able to operate as a 25GBASE-LR PMA/PMD type. When read as a zero, bit 1.19.6 indicates that the PMA/PMD is not able to operate as a 25GBASE-LR PMA/PMD type.

78. Energy-Efficient Ethernet (EEE)

78.1 Overview

78.1.4 PHY types optionally supporting EEE

Insert new rows into Table 78–1 after 25GBASE-SR (as inserted by IEEE Std 802.3by-2016) and before 25GBASE-T (as inserted by IEEE Std 802.3bq-2016) as follows (unmodified rows not shown):

Table 78–1—Clauses associated with each PHY or interface type

PHY or interface type	Clause
25GBASE-LR ^b	107, 108, 109, 114
25GBASE-ER ^b	107, 108, 109, 114

^a25GAUI/XLAUI/CAUI-n shutdown is supported only when deep sleep is enabled for the associated PHY.

^bThe deep sleep mode of EEE is not supported for this PHY.

105. Introduction to 25 Gb/s networks

105.1 Overview

105.1.1 Scope

Change the first paragraph of 105.1.1 (as inserted by IEEE Std 802.3by-2016 and modified by IEEE Std 802.3bq-2016) as follows:

25 Gigabit Ethernet uses the IEEE 802.3 MAC sublayer, connected through a 25 Gigabit Media Independent Interface (25GMII) to Physical Layer entities such as 25GBASE-CR, 25GBASE-CR-S, 25GBASE-KR, 25GBASE-KR-S, 25GBASE-SR, ~~and 25GBASE-T~~, 25GBASE-LR, and 25GBASE-ER.

105.1.2 Relationship of 25 Gigabit Ethernet to the ISO OSI reference model

Change item c) of 105.1.2 (as inserted by IEEE Std 802.3by-2016) as follows:

- a) The Media Dependent Interface (MDI) as specified in Clause 110 for 25GBASE-CR and 25GBASE-CR-S, in Clause 111 for 25GBASE-KR and 25GBASE-KR-S, ~~or in Clause 112 for 25GBASE-SR, or in Clause 114 for 25GBASE-LR and 25GBASE-ER~~ uses a single-lane data path.

105.1.3 Nomenclature

Change the second paragraph of 105.1.3 (as inserted by IEEE Std 802.3by-2016) as follows:

The term 25GBASE-R refers to a specific family of Physical Layer implementations based upon the 64B/66B data coding method specified in Clause 107. The 25GBASE-R family is composed of 25GBASE-CR, 25GBASE-CR-S, 25GBASE-KR, 25GBASE-KR-S, ~~and 25GBASE-SR~~, 25GBASE-LR, and 25GBASE-ER.

Insert rows to Table 105-1 in 105.1.3 (as inserted by IEEE Std 802.3by-2016) after 25GBASE-SR and before 25GBASE-T (as inserted by IEEE Std 802.3bq-2016) as follows (unchanged rows not shown):

Table 105-1—25 Gb/s PHYs

Name	Description
25GBASE-LR	25 Gb/s PHY using 25GBASE-R encoding over a duplex single-mode fiber, with reach up to at least 10 km (see Clause 114).
25GBASE-ER	25 Gb/s PHY using 25GBASE-R encoding over a duplex single-mode fiber, with reach up to at least 40 km (see Clause 114).

105.2 Physical Layer signaling systems

Change Table 105-2 (as inserted by IEEE Std 802.3by-2016 and modified by IEEE Std 802.3bq-2016) as follows:

Table 105-2—Nomenclature and clause correlation, 25 Gb/s Ethernet PHYs

Nomenclature	Clause/Annex																		
	28	73	74	78	106		107	108	109	109A	109B	110		111		112	113	114	
	Auto-Negotiation	Auto-Negotiation	BASE-R FEC	EEE	RS	25GMII	25GBASE-R PCS	25GBASE-R RS-FEC	PMA	25GAUI C2C	25GAUI C2M	25GBASE-CR PMD	25GBASE-CR-S PMD	25GBASE-KR PMD	25GBASE-KR-S PMD	25GBASE-SR PMD	25GBASE-T PCS/PMA	25GBASE-LR PMD	25GBASE-ER PMD
25GBASE-CR		M ^a	M	O ^a	M	O	M	M	M	O		M							
25GBASE-CR-S		M	M	O	M	O	M		M	O			M						
25GBASE-KR		M	M	O	M	O	M	M	M	O				M					
25GBASE-KR-S		M	M	O	M	O	M		M	O					M				
25GBASE-SR				O	M	O	M	M	M	O	O					M			
25GBASE-T	M			O	M	O											M		
25GBASE-LR				O	M	O	M	M	M	O	O							M	
25GBASE-ER				O	M	O	M	M	M	O	O								M

^aO = Optional, M = Mandatory

105.3 Summary of 25 Gigabit Ethernet sublayers

105.3.5 Physical Medium Dependent (PMD) sublayer

Change the third paragraph of 105.3.5 (as inserted by IEEE Std 802.3by-2016) as follows:

The 25GBASE-R PMDs and their corresponding media are specified in [Clause 110](#), [Clause 111](#), and [Clause 112](#), and [Clause 114](#).

105.5 Delay constraints

Insert two new rows below 25GBASE-SR PMD in Table 105-3 (as inserted by IEEE Std 802.3by-2016) and above 25GBASE-T (as inserted by IEEE Std 802.3bq-2016) as follows:

Table 105–3—Sublayer delay constraints

Sublayer	Maximum (bit time) ^a	Maximum (pause_quantum) ^b	Maximum (ns)	Notes ^c
25GBASE-LR PMD	512	1	20.48	See 114.3.
25GBASE-ER PMD	512	1	20.48	See 114.3.

^a1 bit time (BT) is equal to 40 ps. (See [1.4.117](#) for the definition of bit time.)

^b1 pause_quantum is equal to 20.48 ns. (See [31B.2](#) for the definition of pause_quantum.)

^cShould there be a discrepancy between this table and the delay requirements of the relevant sublayer clause, the sublayer clause prevails.

105.7 Protocol implementation conformance statement (PICS) proforma

Change the first paragraph of 105.7 (as added by IEEE Std 802.3by-2016) as follows:

The supplier of a protocol implementation that is claimed to conform to any part of IEEE Std 802.3, Clause 45, [Clause 73](#), [Clause 74](#), [Clause 106](#) through [Clause 112](#), [Clause 114](#), and related annexes demonstrates compliance by completing a protocol implementation conformance statement (PICS) proforma.

108. Reed-Solomon Forward Error Correction (RS-FEC) sublayer for 25GBASE-R PHYs

108.5 Functions within the 25GBASE-R RS-FEC sublayer

108.5.3 Receive function

108.5.3.2 Reed-Solomon decoder

Change the third paragraph of 108.5.3.2 (as added by IEEE Std 802.3by-2016) as follows:

The Reed-Solomon decoder may provide the option to perform error detection without error correction to reduce the delay contributed by the 25GBASE-R RS-FEC sublayer. The presence of this option is indicated by the assertion of the FEC_bypass_correction_ability variable (see 108.6.4). When the option is provided, it is enabled by the assertion of the FEC_bypass_correction_enable variable (see 108.6.1). This option shall not be used when the 25GBASE-R RS-FEC sublayer is used to form part of a 25GBASE-SR, 25GBASE-LR, or 25GBASE-ER PHY.

**108.7 Protocol implementation conformance statement (PICS) proforma for
Clause 108, Reed-Solomon Forward Error Correction (RS-FEC) sublayer for
25GBASE-R PHYs¹****108.7.3 Major capabilities/options**

*Insert the following rows for *LR and *ER after *SR in the table in 108.7.3 (as added by IEEE Std 802.3by-2016):*

Item	Feature	Subclause	Value/Comment	Status	Support
*LR	25GBASE-LR		Used to form a complete 25GBASE-LR PHY	O	Yes [] No []
*ER	25GBASE-ER		Used to form a complete 25GBASE-ER PHY	O	Yes [] No []

108.7.4 PICS proforma tables for Reed-Solomon Forward Error Correction (RS-FEC) sublayer for 25GBASE-R PHYs**108.7.4.2 Receive function**

Change the row with Item RF3 in the table in 108.7.4.2 (as added by IEEE Std 802.3by-2016) as follows:

Item	Feature	Subclause	Value/Comment	Status	Support
RF3	Error correction not bypassed for 25GBASE-SR, 25GBASE-LR, or 25GBASE-ER	108.5.3.2	Error correction is not bypassed	BEC*(SR or LR or ER):M	Yes [] N/A []

¹Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this subclause so that it can be used for its intended purpose and may further publish the completed PICS.

Insert Clause 114 as follows:

114. Physical Medium Dependent (PMD) sublayer and medium, types 25GBASE-LR and 25GBASE-ER

114.1 Overview

This clause specifies the 25GBASE-LR PMD and 25GBASE-ER PMD together with the single-mode fiber medium. The PMD sublayer provides a point-to-point 25 Gb/s Ethernet link over a pair of single-mode fibers. When forming a complete Physical Layer, a PMD shall be connected to the appropriate PMA as shown in Table 114–1, to the medium through the MDI and optionally with the management functions that may be accessible through the management interface defined in Clause 45, or equivalent.

Table 114–1—Physical Layer clauses associated with the 25GBASE-LR and 25GBASE-ER PMDs

Associated clause	25GBASE-LR	25GBASE-ER
106—RS	Required	Required
106—25GMII ^a	Optional	Optional
107—PCS for 25GBASE-R	Required	Required
108—RS-FEC ^b	Required	Required
109—PMA for 25GBASE-R	Required	Required
109A—25GAUI C2C	Optional	Optional
109B—25GAUI C2M	Optional	Optional
78—Energy Efficient Ethernet	Optional	Optional


^aThe 25GMII is an optional interface. However, if the 25GMII is not implemented, a conforming implementation must behave functionally as though the RS and 25GMII were present.

^bThe option to bypass the Clause 108 RS-FEC correction function is not supported.

Figure 114–1 shows the relationship of the PMD and MDI (shown shaded) with other sublayers to the ISO/IEC Open System Interconnection (OSI) reference model. 25 Gigabit Ethernet is introduced in Clause 105 and the purpose of each PHY sublayer is summarized in 105.3.

25GBASE-LR and 25GBASE-ER PHYs with the optional Energy Efficient Ethernet (EEE) fast wake capability may enter the Low Power Idle (LPI) mode to conserve energy during periods of low link utilization (see Clause 78). The deep sleep mode of EEE is not supported.

Further relevant information may be found in Clause 1 (terminology and conventions, references, definitions, and abbreviations) and Annex A (Bibliography, referenced as [B1], [B2], etc.).

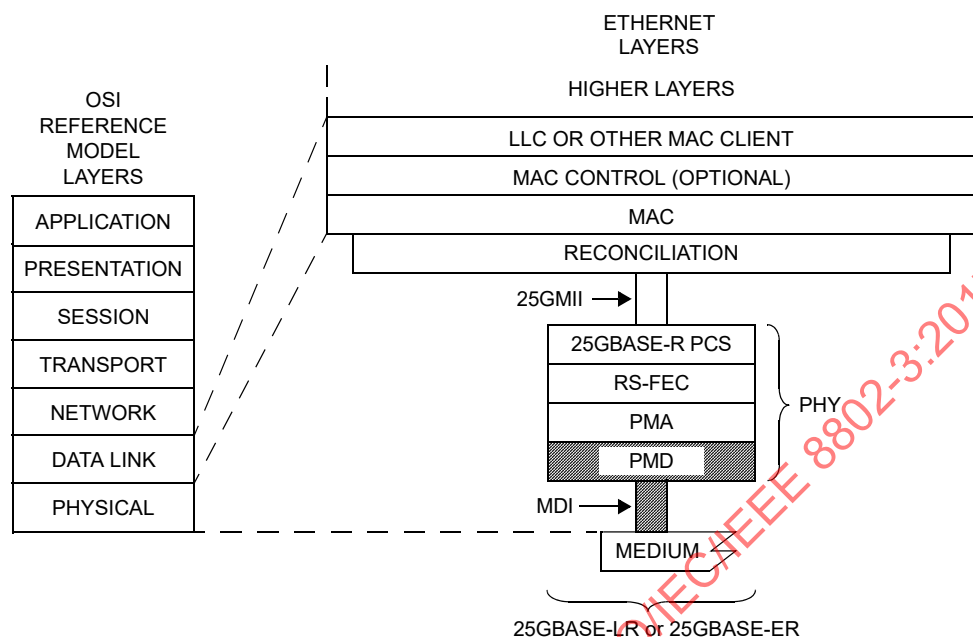

25GMII = 25 GIGABIT MEDIA INDEPENDENT INTERFACE
 LLC = LOGICAL LINK CONTROL
 MAC = MEDIA ACCESS CONTROL
 MDI = MEDIUM DEPENDENT INTERFACE
 PCS = PHYSICAL CODING SUBLAYER
 PHY = PHYSICAL LAYER DEVICE

PMA = PHYSICAL MEDIUM ATTACHMENT
 PMD = PHYSICAL MEDIUM DEPENDENT
 RS-FEC = REED-SOLOMON FORWARD ERROR CORRECTION
 LR = PMD FOR SINGLE-MODE FIBER - 10 km
 ER = PMD FOR SINGLE-MODE FIBER - 40 km

Figure 114–1—25GBASE-LR and 25GBASE-ER PMDs' relationship to the ISO/IEC Open Systems Interconnection (OSI) reference model and the IEEE 802.3 Ethernet model

114.1.1 Bit error ratio

The bit error ratio (BER) shall be less than 5×10^{-5} provided that the error statistics are sufficiently random that this results in a frame loss ratio (see 1.4.223) of less than 6.2×10^{-10} for 64-octet frames with minimum interpacket gap when processed according to Clause 108.

If the error statistics are not sufficiently random to meet this requirement, then the BER shall be less than that required to give a frame loss ratio of less than 6.2×10^{-10} for 64-octet frames with minimum interpacket gap when processed according to Clause 108.

114.2 Physical Medium Dependent (PMD) service interface

The PMD service interfaces for 25GBASE-LR and 25GBASE-ER are the same as PMD service interface for 25GBASE-SR as described in 112.2 with the BER as specified in 114.1.1.

114.3 Delay constraints

An upper bound to the delay through the PMA and PMD is required for predictable operation of the MAC Control PAUSE operation. The sum of the transmit and receive delays at one end of the link contributed by

the 25GBASE-LR or 25GBASE-ER PMD including 2 m of fiber in one direction shall be no more than 512 bit times (1 pause_quantum or 20.48 ns). A description of overall system delay constraints and the definitions for bit times and pause_quantum can be found in 105.5 and its references.

114.4 PMD MDIO function mapping

The optional MDIO capability described in Clause 45 defines several variables that may provide control and status information for and about the PMD. If the MDIO interface is implemented, the mapping of MDIO control variables to PMD control variables shall be as shown in Table 114–2 and the mapping of MDIO status variables to PMD status variables shall be as shown in Table 114–3.

Table 114–2—MDIO/PMD control variable mapping

MDIO control variable	PMA/PMD register name	Register/bit number	PMD control variable
Reset	PMA/PMD control 1 register	1.0.15	PMD_reset
Global PMD transmit disable	PMD transmit disable register	1.9.0	PMD_global_transmit_disable

Table 114–3—MDIO/PMD status variable mapping

MDIO status variable	PMA/PMD register name	Register/bit number	PMD status variable
Fault	PMA/PMD status 1 register	1.1.7	PMD_fault
Transmit fault	PMA/PMD status 2 register	1.8.11	PMD_transmit_fault
Receive fault	PMA/PMD status 2 register	1.8.10	PMD_receive_fault
Global PMD receive signal detect	PMD receive signal detect register	1.10.0	PMD_global_signal_detect

114.5 PMD functional specifications

The 25GBASE-LR and 25GBASE-ER PMDs perform the Transmit and Receive functions, which convey data between the PMD service interface and the MDI.

114.5.1 PMD block diagram

The PMD block diagram is shown in Figure 114–2. For purposes of system conformance, the PMD sublayer is standardized at the points described in this subclause. The optical transmit signal is defined at the output end of a single-mode fiber patch cord (TP2), between 2 m and 5 m in length. Unless specified otherwise, all transmitter measurements and tests defined in 114.7 are made at TP2. The optical receive signal is defined at the output of the fiber optic cabling (TP3) at the MDI (see 88.11.3). Unless specified otherwise, all receiver measurements and tests defined in 114.7 are made at TP3.

TP1 and TP4 are informative reference points that may be useful to implementers for testing components (these test points will not typically be accessible in an implemented system).

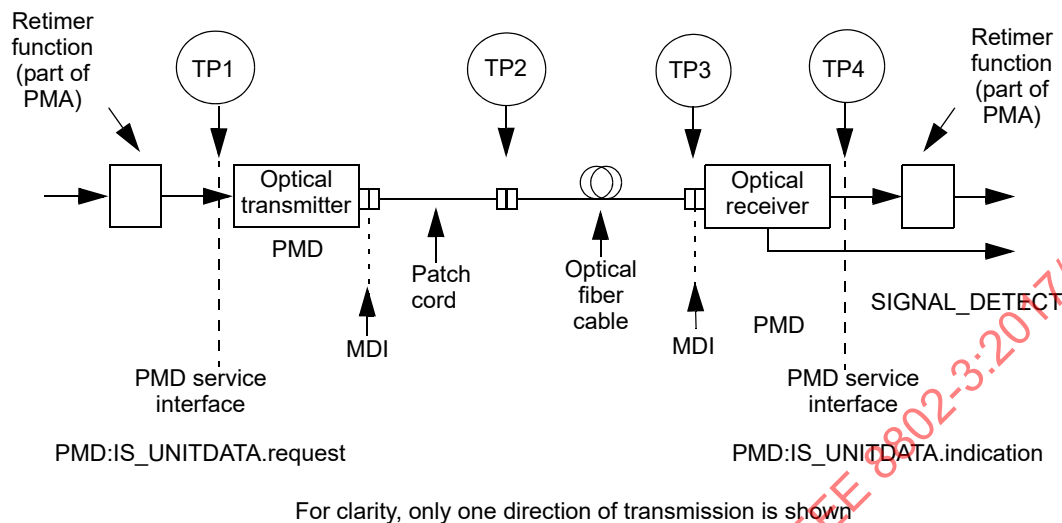


Figure 114-2—Block diagram for 25GBASE-LR and 25GBASE-ER transmit/receive paths

114.5.2 PMD transmit function

The PMD transmit function shall convert the bit stream requested by the PMD service interface messages `PMD:IS_UNITDATA.request` into an optical signal stream. The optical signal stream shall then be delivered to the MDI, all according to the transmit optical specifications in this clause. The higher optical power level in the signal stream shall correspond to `tx_bit = one`.

114.5.3 PMD receive function

The PMD receive function shall convert the optical signal stream received from the MDI into a bit stream for delivery to the PMD service interface using the messages `PMD:IS_UNITDATA.indication`, all according to the receive optical specifications in this clause. The higher optical power level in the signal stream shall correspond to `rx_bit = one`.

114.5.4 PMD global signal detect function

The PMD global signal detect function shall report the state of `SIGNAL_DETECT` via the PMD service interface. The `SIGNAL_DETECT` parameter is signaled continuously, while the `PMD:IS_SIGNAL.indication` message is generated when a change in the value of `SIGNAL_DETECT` occurs. The `SIGNAL_DETECT` parameter defined in this clause maps to the `SIGNAL_OK` parameter in the inter-sublayer service interface primitives defined in 105.4.

`SIGNAL_DETECT` shall be the indicator of the presence of the optical signal. The value of the `SIGNAL_DETECT` parameter shall be generated according to the conditions defined in Table 114-4. The PMD receiver is not required to verify whether a compliant 25GBASE-R signal is being received. This standard imposes no response time requirements on the generation of the `SIGNAL_DETECT` parameter.

As an unavoidable consequence of the requirements for the setting of the `SIGNAL_DETECT` parameter, implementations must provide adequate margin between the input optical power level at which the

Table 114-4—SIGNAL_DETECT value definition

Receive conditions	SIGNAL_DETECT value
Average optical power at TP3 ≤ -20 dBm for 25GBASE-LR and ≤ -26 dBm for 25GBASE-ER	FAIL
[(Optical power at TP3 $\geq$ receiver sensitivity (max) in OMA in Table 114-7) AND (compliant 25GBASE-R signal input)]	OK
All other conditions	Unspecified

SIGNAL_DETECT parameter is set to OK, and the inherent noise level of the PMD including the effects of crosstalk, power supply noise, etc.

Various implementations of the PMD global signal detect function are permitted by this standard, including implementations that generate the SIGNAL_DETECT parameter values in response to the amplitude of the modulation of the optical signal and implementations that respond to the average optical power of the modulated optical signal. When the MDIO is implemented, the SIGNAL_DETECT value shall be continuously set in response to the magnitude of the optical signal, according to the requirements of Table 114-4.

114.5.5 PMD reset function

If the MDIO interface is implemented, and if PMD_reset is asserted, the PMD shall be reset as defined in 45.2.1.1.1.

114.5.6 PMD global transmit disable function (optional)

The PMD_global_transmit_disable function is optional and allows the optical transmitter to be disabled.

- When PMD_global_transmit_disable is set to one, this function shall turn off the optical transmitter so that it meets the requirement of the average launch power of the OFF transmitter in Table 114-6.
- If PMD_fault is detected, then the PMD may set PMD_global_transmit_disable to one, turning off the optical transmitter.

114.5.7 PMD fault function (optional)

If the PMD has detected a local fault on the transmit or receive paths, the PMD shall set PMD_fault to one.

If the MDIO interface is implemented, PMD_fault shall be mapped to the fault bit as specified in 45.2.1.2.3.

114.5.8 PMD transmit fault function (optional)

If the PMD has detected a local fault on the transmitter, the PMD shall set PMD_transmit_fault to one.

If the MDIO interface is implemented, PMD_transmit_fault shall be mapped to the transmit fault bit as specified in 45.2.1.7.4.

114.5.9 PMD receive fault function (optional)

If the PMD has detected a local fault on the receiver, the PMD shall set PMD_receive_fault to one.

If the MDIO interface is implemented, PMD_receive_fault shall be mapped to the receive fault bit as specified in 45.2.1.7.5.

114.6 PMD to MDI optical specifications for 25GBASE-LR and 25GBASE-ER

The operating ranges for the 25GBASE-LR and 25GBASE-ER PMDs are defined in Table 114–5. A 25GBASE-LR or 25GBASE-ER compliant PMD operates on IEC 60793-2-50 type B1.1 (dispersion unshifted), type B1.3 (low water peak), or type B6_a (bend insensitive) single-mode fibers according to the specifications defined in Table 114–11. A PMD that exceeds the operating range requirement while meeting all other optical specifications is considered compliant (e.g., a 25GBASE-LR PMD operating at 12.5 km meets the operating range requirement of 2 m to 10 km). The 25GBASE-ER PMD interoperates with the 25GBASE-LR PMD provided that the channel requirements defined in 114.11 are met.

Table 114–5—25GBASE-LR and 25GBASE-ER operating ranges

PMD type	Required operating range ^a
25GBASE-LR	2 m to 10 km
25GBASE-ER	2 m to 30 km
	2 m to 40 km ^b

^aThe RS-FEC correction function may not be bypassed for any operating distance.

^bLinks longer than 30 km for the same link power budget are considered engineered links. Attenuation for such links needs to be less than the worst case specified for IEC 60793-2-50 type B1.1, type B1.3, or type B6_a single-mode fiber.

114.6.1 25GBASE-LR and 25GBASE-ER transmitter optical specifications

The 25GBASE-LR and 25GBASE-ER transmitters shall meet the specifications in Table 114–6 per the definitions in 114.7.

Table 114–6—25GBASE-LR and 25GBASE-ER transmit characteristics

Description	25GBASE-LR	25GBASE-ER	Unit
Signaling rate (range)	25.78125 ± 100 ppm		GBd
Center wavelength (range)	1295 to 1325	1295 to 1310	nm
Side-mode suppression ratio (SMSR), (min)	30		dB
Average launch power (max)	2	6	dBm
Average launch power ^a (min)	–7	–3	dBm
Optical Modulation Amplitude (OMA), (max)	2.2	6	dBm
Optical Modulation Amplitude (OMA), ^b (min)	–4	0	dBm
Launch power in OMA minus TDP (min)	–5	–1	dBm
Transmitter and dispersion penalty (TDP), (max)	2.7	2.7	dB

Table 114–6—25GBASE-LR and 25GBASE-ER transmit characteristics (continued)

Description	25GBASE-LR	25GBASE-ER	Unit
Average launch power of OFF transmitter (max)	–20		dBm
Extinction ratio (min)	3	4	dB
RIN ₂₀ OMA (max)	–130		dB/Hz
Optical return loss tolerance (max)	20		dB
Transmitter reflectance ^c (max)	–26		dB
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3} Hit ratio 5×10^{-5} hits per sample.	{0.31, 0.4, 0.45, 0.34, 0.38, 0.4}		

^aAverage launch power (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.

^bEven if the TDP < 1 dB, the OMA (min) must exceed this value.

^cTransmitter reflectance is defined looking into the transmitter.

114.6.2 25GBASE-LR and 25GBASE-ER receive optical specifications

The 25GBASE-LR and 25GBASE-ER receivers shall meet the specifications in Table 114–7 per the definitions in 114.7.

Table 114–7—25GBASE-LR and 25GBASE-ER receive characteristics

Description	25GBASE-LR	25GBASE-ER	Unit
Signaling rate (range)	25.78125 ± 100 ppm		GBd
Center wavelength (range)	1295 to 1325		nm
Damage threshold ^a (min)	3	–3	dBm
Average receive power (max)	2	–4	dBm
Average receive power ^b (min)	–13.3	–21	dBm
Receive power (OMA), (max)	2.2	–4	dBm
Receiver reflectance (max)	–26		dB
Receiver sensitivity (OMA), ^c (max)	–12	–19	dBm
Stressed receiver sensitivity (OMA), ^d (max)	–9.5	–16.5	dBm
Conditions of stressed receiver sensitivity test			
Stressed eye closure ^e	2.5	2.5	dB
Stressed eye J2 Jitter ^e	0.27	0.27	UI
Stressed eye J4 Jitter ^e	0.39	0.39	UI
SRS eye mask definition {X1, X2, X3, Y1, Y2, Y3} Hit ratio 5×10^{-5} hits per sample.	{0.31, 0.4, 0.45, 0.34, 0.38, 0.4}		

^aThe receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level.

^bAverage receive power (min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.

^cReceiver sensitivity (OMA), (max) is informative.

^dMeasured with conformance test signal at TP3 (see 114.7.10) for the BER specified in 114.1.1.

^eStressed eye closure, stressed eye J2 Jitter, and stressed eye J4 Jitter are test conditions for measuring stressed receiver sensitivity. They are not characteristics of the receiver.

114.6.3 25GBASE-LR and 25GBASE-ER illustrative link power budgets

Illustrative power budgets and penalties for 25GBASE-LR and 25GBASE-ER channels are shown in Table 114–8.

Table 114–8—25GBASE-LR and 25GBASE-ER illustrative link power budgets

Parameter	25GBASE-LR	25GBASE-ER		Unit
Power budget (for maximum TDP)	9.7	20.7		dB
Operating distance	10	30	40 ^a	km
Channel insertion loss	6.3 ^b	15 ^b	See 114.9 ^a	dB
Maximum discrete reflectance	See 114.10	See 114.10		dB
Allocation for penalties ^c (for maximum TDP)	3.4	20.7 minus maximum channel insertion loss per Table 114–12		dB
Additional insertion loss allowed	0	Maximum channel insertion loss per Table 114–12 minus 15	0	dB

^aLinks longer than 30 km are considered engineered links. Attenuation for such links needs to be less than the worst case for cables containing IEC 60793-2-50 type B1.1, type B1.3, or type B6, a single-mode cabled optical fiber.

^bThe channel insertion loss is calculated using the maximum distance specified in Table 114–5 and fiber attenuation of 0.43 dB/km at 1295 nm plus an allocation for connection and splice loss given in 88.11.2.1.

^cLink penalties are used for link budget calculations. They are not requirements and are not meant to be tested.

114.7 Definition of optical parameters and measurement methods

All transmitter optical measurements shall be made through a short patch cable, between 2 m and 5 m in length, unless otherwise specified.

114.7.1 Test patterns for optical parameters

The test patterns used in this clause shall be the same as those used for 100GBASE-SR4, as described in 95.8.1 and shown in Table 95-9, with the exception that pattern 5, the scrambled idle test pattern defined in 82.2.11, is encoded by Clause 108 RS-FEC for 25GBASE-LR and 25GBASE-ER. The multi-lane testing considerations described in 95.8.1.1 do not apply. Table 114–9 shows the test patterns to be used in each measurement, unless otherwise specified, and also lists references to the subclauses in which each parameter is defined.

114.7.2 Wavelength

The wavelength shall be within the ranges given in Table 114–6 if measured per TIA-455-127-A or IEC 61280-1-3. The signal is modulated using the test pattern specified in Table 114–9.

Table 114–9—Test-pattern definitions and related subclauses

Parameter	Pattern	Related subclause
Wavelength	3, 5 or valid 25GBASE-R signal	114.7.2
Side mode suppression ratio	3, 5 or valid 25GBASE-R signal	—
Average optical power	3, 5 or valid 25GBASE-R signal	114.7.3
Optical modulation amplitude (OMA)	Square wave or 4	114.7.4
Transmitter and dispersion penalty (TDP)	3, 5 or valid 25GBASE-R signal	114.7.5
Extinction ratio	3, 5 or valid 25GBASE-R signal	114.7.6
RIN ₂₀ OMA	Square wave or 4	114.7.7
Transmitter optical waveform	3, 5 or valid 25GBASE-R signal	114.7.8
Stressed receiver sensitivity	3, 5 or valid 25GBASE-R signal	114.7.10
Calibration of OMA for receiver tests	Square wave or 4	87.8.11
Vertical eye closure penalty calibration	3, 5 or valid 25GBASE-R signal	87.8.11

114.7.3 Average optical power

The average optical power shall be within the limits given in Table 114–6 if measured using the methods given in IEC 61280-1-1. The average optical power is measured using the test pattern specified in Table 114–9.

114.7.4 Optical Modulation Amplitude (OMA)

OMA shall be as defined in 52.9.5 for measurement with a square wave (8 ones, 8 zeros) test pattern or 68.6.2 (from the variable MeasuredOMA in 68.6.6.2) for measurement with a PRBS9 test pattern. See 114.7.1 for test pattern information.

114.7.5 Transmitter and dispersion penalty (TDP)

Transmitter and dispersion penalty (TDP) shall be as defined in 52.9.10 with the BER as specified in 114.1.1. The measurement procedure for 25GBASE-LR and 25GBASE-ER is detailed in 114.7.5.1 to 114.7.5.4.

114.7.5.1 Reference transmitter requirements

The reference transmitter is a high-quality instrument-grade device, which can be implemented by a CW laser modulated by a high-performance modulator. The basic requirements are as follows:

- Rise/fall times of less than 12 ps at 20% to 80%.
- The output optical eye is symmetric and passes the transmitter optical waveform test of 114.7.8.
- In the center 20% region of the eye, the worst-case vertical eye closure penalty as defined in 87.8.11.2 is less than 0.5 dB.
- Total Jitter less than 0.2 UI peak-to-peak.
- RIN of less than –138 dB/Hz.