

AEROSPACE INFORMATION REPORT

SAE AIR764

REV.
C

Issued 1976-10
Revised 1997-03
Reaffirmed 2008-06
Superseding AIR764B

SKID CONTROL SYSTEM VIBRATION SURVEY

FOREWORD

Changes in the revision are format/editorial only.

1. SCOPE:

This technical report documents three surveys to determine realistic vibration requirements for skid control systems specifications and obtain updated vibration information for locations in aircraft where skid control system components are mounted.

2. REFERENCES:

2.1 Applicable Documents:

The following publications form a part of this document to the extent specified herein. The latest issue of SAE publications shall apply. The applicable issue of other publications shall be the issue in effect on the date of the purchase order. In the event of conflict between the text of this document and references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

- 2.1.1 SAE Publications: Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

AS483 Skid Control Equipment

- 2.1.2 U.S. Government Publications: Available from DODSSP, Subscription Services Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

MIL-STD-810C Environmental Test Methods

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2008 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

SAE AIR764 Revision C

3. 1957 SURVEY:

During 1957, an industry survey was conducted by SAE Committee A-5 to determine realistic vibration requirements for skid control system specifications. A questionnaire was sent to sixteen airframe manufacturers, three Government agencies, and five skid control system manufacturers. This questionnaire asked for any information that might be available on the vibration characteristics that had been either experienced or calculated on an aircraft in the areas where skid control system components would normally be located, specifically at the axle and at the skid control box locations.

Replies were received from eleven airframe manufacturers, one Government agency, and two skid control manufacturers. Six of these replies stated that they had no information available. Eight airframe manufacturers reported either estimated or measured values as follows:

TABLE 1

Company Reporting	Axle Vibration Meas.	Axle Vibration Est.	Skid Control Box Location Vibration Meas.	Skid Control Box Location Vibration Est.
Boeing		x		x
Convair, SD			x	
Convair, FW		x	x	
Fairchild	x			
Lockheed	x			
McDonnell	x			
North American	x			
Northrop		x	x	

The reported values are plotted on Figures 1 and 2 showing the comparison of these values with the vibration requirements of AS483, Skid Control Equipment.

Study of the figures shows that vibration may occur at the skid control box location with values varying from .03g to 10g and from 5 Hz to 1,000 Hz. Axle vibration values vary from .3g to 200g and 5 Hz to 1,000 Hz.

At the A-5 meeting in October, 1957, the results of this survey were reviewed and it was agreed that skid control system specifications should contain minimum vibration requirements with the stipulation that, if more extreme conditions were anticipated in the aircraft, the higher values should be used in the qualification test. Since the values of the survey are so widely scattered, it would be difficult, if not impossible, to accurately represent more rigorous conditions to be followed in a general specification.

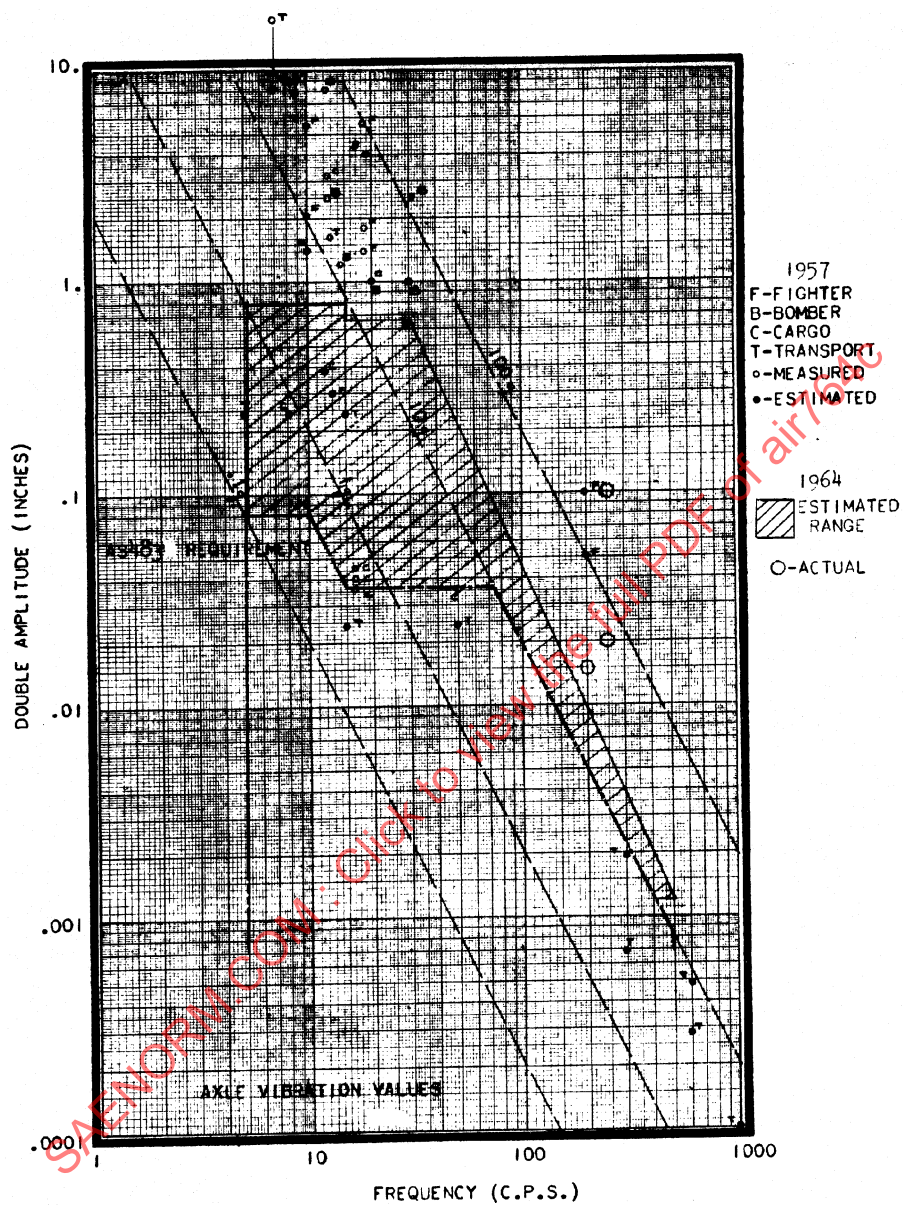


FIGURE 1

SAE AIR764 Revision C

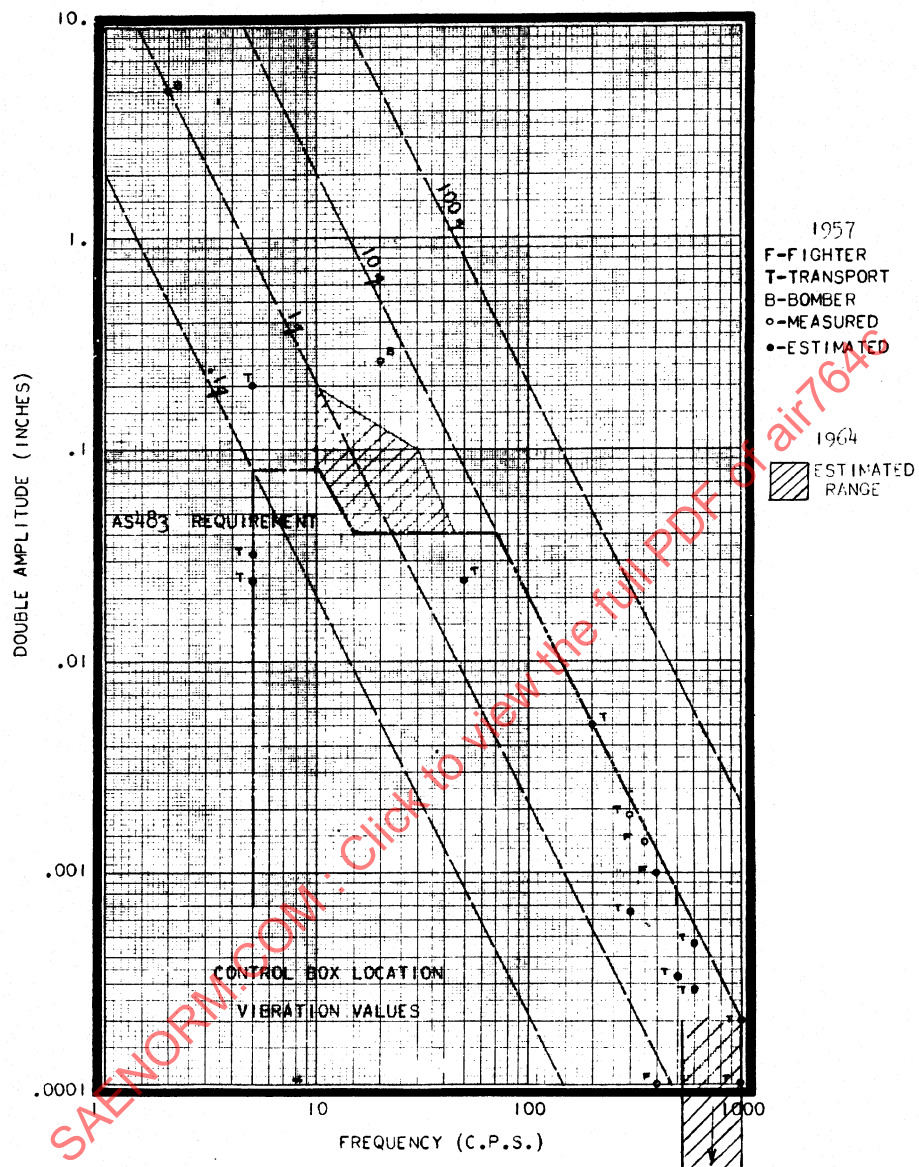


FIGURE 2

SAE AIR764 Revision C

3. (Continued):

This information is presented merely to show the conditions that exist in some airplanes and it should be used cautiously in requiring higher vibration values for any qualification test. It should be kept in mind that these axle vibration conditions may be transients and only occur for extremely short periods of time during a landing.

4. 1964 SURVEY:

In 1964, a survey similar to that which was completed in 1957 was conducted to determine if there was later information that would affect skid control system requirements. Fourteen answers to the questionnaire were received. The results are as follows:

TABLE 2

Source	No.	Information
Airframe Manufacturers	6	See following paragraph
Military	0	
Airlines	2	No new information ¹
Wheel, Brake, and Skid Control Manufacturers	<u>6</u>	No new information
	14	

¹ One airline reported a severe vibration condition of the gear on one model airplane but the skid control system wheel speed transducers did not appear to be adversely affected as compared to the same transducer on other models.

Information from Airframe Manufacturers:

- 1 - Nothing new
- 1 - Same as AS483
- 1 - Same as AS483 but with noise requirement added
- 3 - Similar to AS483 but with higher amplitude at low frequency and lower amplitude at very high frequency

This information is estimated and is included in each of these company's specifications for specific aircraft equipment. One of these airframe manufacturers gave measured values of axle vibration which are slightly higher than indicated in the 1957 survey.

This information has been added to Figures 1 and 2 as noted in the figure margins.

SAE AIR764 Revision C

5. 1976 SURVEY:

(R)

In 1976, a survey was conducted to obtain updated vibration information for the locations in aircraft where skid control system components are mounted. This survey was similar to those completed in 1957 and 1964 except that it was expanded to include the skid control valve and cockpit display locations. Also, random vibration data was requested for all locations since this type testing is now preferred by MIL-STD-810C, Environmental Test Methods.

Replies were received from thirteen aerospace industry organizations. The results are as follows:

TABLE 3

Source	Number	Data Sinusoidal	Data Random	No New Data
Airframe Manufacturers	5	4	3	1
Airlines	1			1
Government Agencies	2	1	1	1
Wheel & Brake Manufacturers	3			3
Skid Control Manufacturers	2	1	1	

The reported data is shown in Tables 4 through 8. This method was chosen for presenting the data since AS483A, Skid Control Equipment, no longer contains a vibration range curve that can be used for comparison purposes.

A study of the tables shows the following vibration range:

Sinusoidal

Axle - 3 Hz to 4000 Hz and .018g to 50g.

Skid Control Box - 3 Hz to 2000 Hz and .018g to 20g.

Skid Control Valve - 3 Hz to 2000 Hz and .018g to 30g.

Cockpit Display - 5 Hz to 500 Hz and .13g to 16g.

Random

Axle - 10 Hz to 4000 Hz and 18G-RMS to 50G-RMS.

Skid Control Box - 15 Hz to 2000 Hz and 8.9G-RMS to 14.8G-RMS.

Skid Control Valve - 15 Hz to 2000 Hz and 8.91G-RMS.

Cockpit Display - 20 Hz to 2000 Hz and 5.19G-RMS to 8.56G-RMS.

SAE AIR764 Revision C

6. NOTES:

- 6.1 The (R) is for the convenience of the user in locating areas where technical revisions, not editorial changes, have been made to the previous issue of this document. If the symbol is to the left of the document title, it indicates a complete revision of the document.

SAENORM.COM : Click to view the full PDF of air764c

PREPARED BY SAE COMMITTEE A-5, AEROSPACE LANDING GEAR SYSTEMS

SAE AIR764 Revision C

(R) TABLE 4 - 1976 Sinusoidal Vibration Data

Location: Axle

Aircraft Type	Freq. Hz	Displacement (Double Ampl) Inches	Acceleration (Peak) $\pm g$	Source Meas.	Source Est.	Remarks
Fighter	5-13	.10	.13-.86		x	
	13-19	.06	.52-1.1		x	
	19-22	.088	1.6 -2.2		x	
	22-74	.036	.89-10		x	
	74-500	.036-.0008	10		x	
Fighter	3-27	.040	.018-1.5		x	
	27-353	.040-.0032	1.5-20		x	Resonance Test
	353-500	.0032-.0016	20		x	
	3-3.6	.03	.14-.20		x	
	3.6-353	.30-.0032	.20-20		x	Endurance Test
Fighter	353-500	.0032-.0016	20		x	
	5-12	.160	.20-1.2		x	
	12-22	.160-.036	1.2-.89		x	
	22-70	.036	.89-9.0		x	
	70-2000	.036-.00005	9.0-10		x	
Fighter	50-75	.036	4.6-10		x	Gunfire
	75-300	.036-.0022	10		x	
	5-10	.08	.10-.41		x	
	10-15	.08-.036	.41		x	
	15-52	.036	.41-5.0		x	
Fighter	52-500	.036-.0004	5.0		x	
	10-18	.20-.06	1.0		x	
	18-100	.06	1.0-30		x	
	100-500	.06-.0023	30		x	
	500-2000	.004-.0002	50		x	
Bomber	2000-4000	.0001-.0002	20		x	
	5-2000	.50-.00015	.64-30		x	Operating
Bomber	5-2000	.50-.0002	.64-40		x	Nonoperating
	5-28	.50	.64-20		x	
Bomber	28-2000	.50-.0001	20		x	

SAE AIR764 Revision C

(R) TABLE 5 - 1976 Sinusoidal Vibration Data

Location: Skid Control Box

Aircraft Type	Freq. Hz	Displacement (Double Ampl) Inches	Acceleration (Peak) $\pm g$	Source Meas.	Source Est.	Remarks
Fighter	5-10	.06	.076-.31		x	
	10-20	.10	.51-2.0		x	
	20-23	.065	1.3-1.8		x	
	23-74	.036	.97-10		x	
	74-500	.036-.0008	10		x	
Fighter	3-27	.04	.018-1.5		x	
	27-353	.04-.0032	1.5-20		x	Resonance Test
	353-500	.0032-.0016	20		x	
	3-3.6	.30	.14-.20		x	
	3.6-353	.30-.0032	.20-20		x	Endurance Test
Fighter	353-500	.0032-.0016	20		x	
	5-11	.18	.23-1.1		x	
	11-22	.18-.036	1.1-.89		x	
	22-40	.036	.89-2.9		x	
	40-300	.036-.0007	2.9-3.2		x	
Fighter	300-2000	.0018-.00004	8.3-8.2		x	
	5-10	.08	.10-.41		x	
	10-15	.08-.036	.41		x	
	15-52	.036	.41-5.0		x	
	52-500	.036-.0004	5.0		x	
Bomber	5-63	.25-.015	.32-3.0		x	Operating
	63-100	.015	3.0-7.7		x	
	5-63	.34-.02	.43-4.0		x	Nonoperating
Bomber	63-100	.02	4.0-10.2		x	
	5-15	.175	.22-2.0		x	
Transport	15-150	.175-.0017	2		x	
	5-15	.1	.13-1.1	x		
	15-100	.108-.0024	1.25	x		Service Level
	100-150	.0005-.0002	.25	x		