

Capacitor, 10 Microfarad for EMI Measurements

FOREWORD

Changes in this reaffirm are format/editorial only.

1. SCOPE:

This Aerospace Recommended Practice (ARP) describes the requirements of a special purpose 10 μ F feed through capacitor to be used in series with the power line to an electrical or electronic device during EMI tests.

2. APPLICABLE DOCUMENTS:

The following documents form a part of this recommended practice to the extent specified herein.

MIL-STD-220 Method of Insertion Loss Measurements

MIL-F-15733 Filters, Radio Interference

3. REQUIREMENTS:

3.1 Electrical Characteristics:

3.1.1 Capacitance: 10 μ F $\pm$ 10%

3.1.2 Voltage: 230 V ac 400 Hz (typical - may be other for special purposes)

3.1.3 Insertion Loss: This should be in accordance with Figure 1 when tested in accordance with section 4.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright 2003 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: custsvc@sae.org
SAE WEB ADDRESS: <http://www.sae.org>

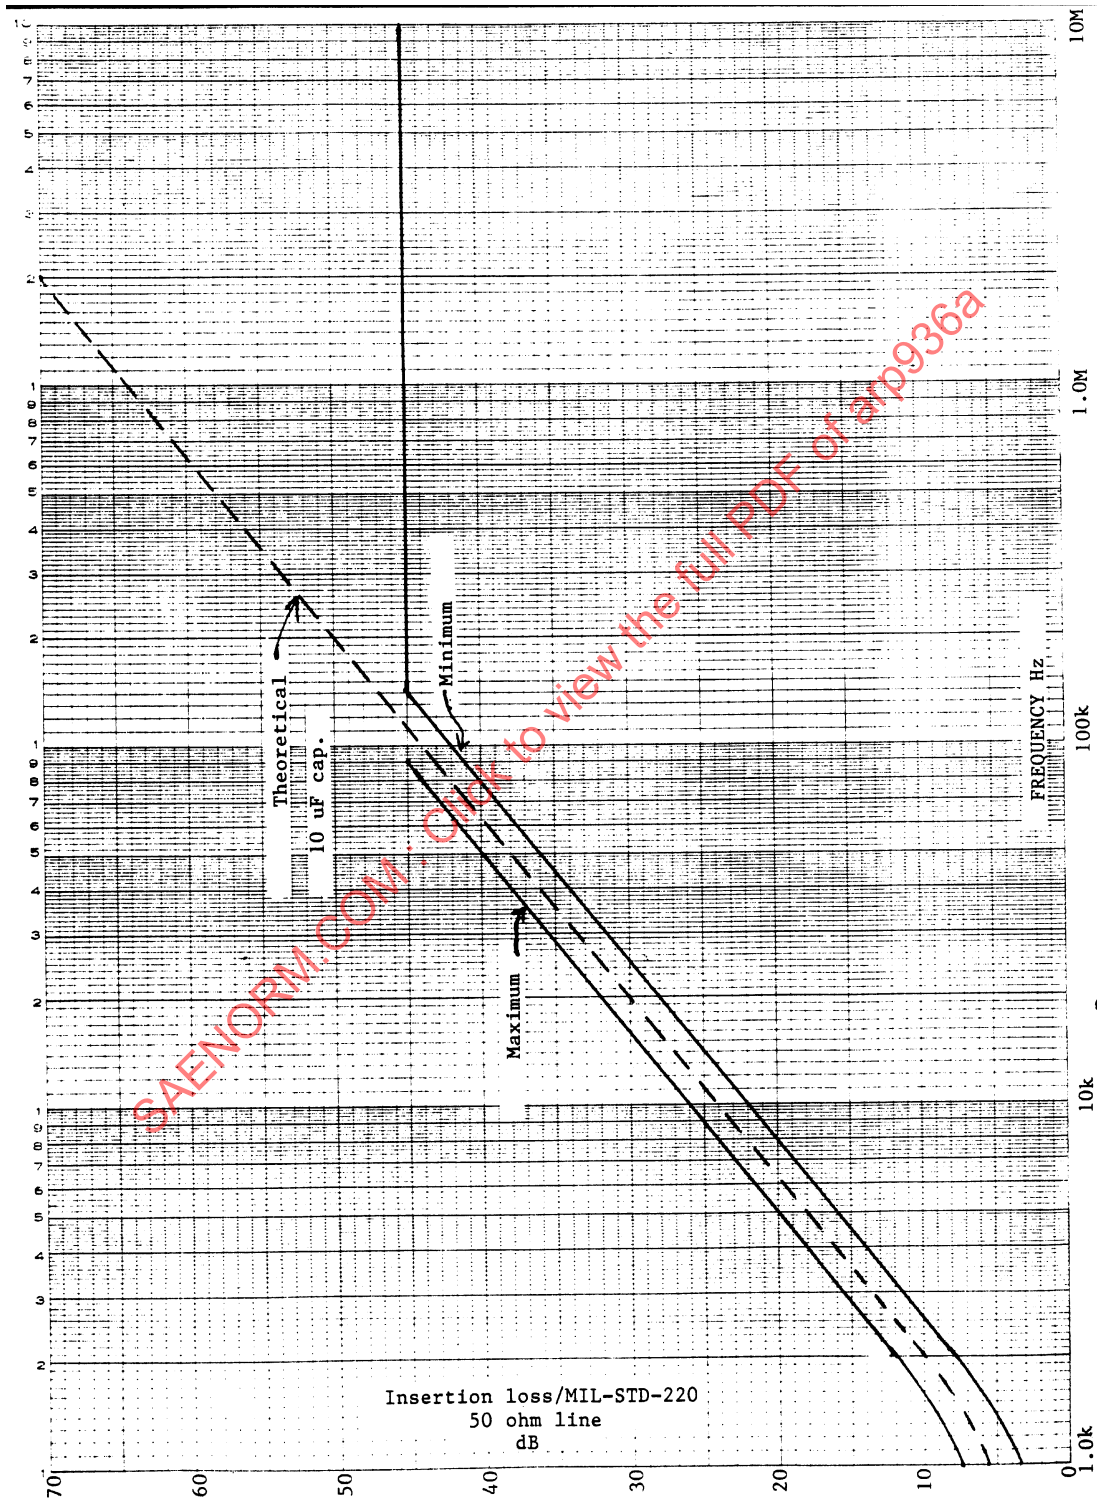


FIGURE 1

3.1.4 Bleed Resistor: A resistor should be connected in parallel with the 10 μ F capacitor, within the capacitor housing, as a personnel safety precaution. The value of the resistor is optional; however, its value should be such that the capacitor will not retain a charge for an extended period of time. The suggested value is 510 000 Ω .

3.1.5 Insulation Resistance: The insulation resistance of the capacitor element (without the bleed resistor) will be 50 M Ω minimum at 25 °C.

3.1.6 Voltage Drop: The voltage drop of the capacitor assembly shall not exceed 1% of the power voltage at rated current when measured in accordance with MIL-F-15733.

3.2 Environmental Requirements:

Since the use of this capacitor is intended for shield room type conditions, the environmental requirements are not intended to be severe.

3.2.1 Temperature:

Operating Temperature -55 to +65 °C

Storage Temperature -55 to +65 °C

3.2.2 Life: The units should meet the requirements of 3.21 of MIL-F-15733.

3.3 Mechanical Requirements:

3.3.1 Mounting: Provisions should be made such that the capacitor assembly can be bonded to the ground plane either permanently or temporarily. However, in temporary installations there should be no danger of the capacitor's losing either its electrical connection or its mechanical mounting strength.

3.3.2 Terminations: Terminations must be selected to handle the full rated current continuously and 140% overload for a period of 15 min without damage. The use of an external ground lug is optional.

3.4 Marking:

3.4.1 Rating: The capacitor assembly should be labeled with the capacity, current rating, and voltage rating.