

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
D

AS1033

FEDERAL SUPPLY CLASS
4730

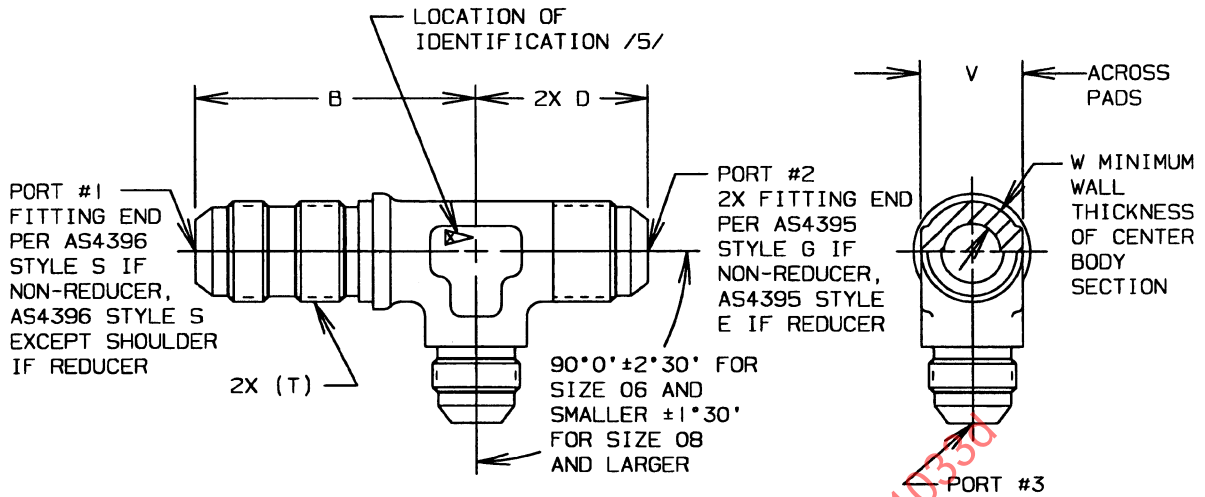


FIGURE 1 - FITTING, TEE, BULKHEAD END FOR OPTIONAL USE IN PORT
PORT #3 SHOWN AS REDUCER


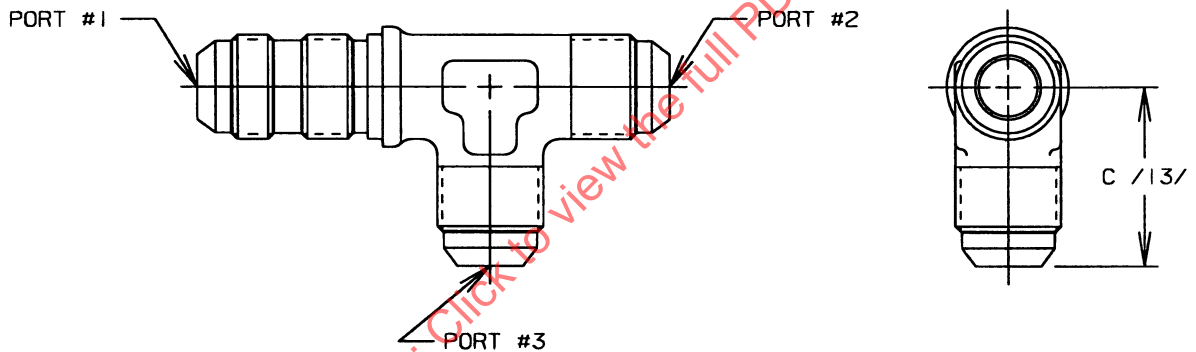


FIGURE 2 - FITTING, TEE, BULKHEAD END FOR OPTIONAL USE IN PORT
NON-REDUCER SHOWN
SAME AS FIGURE 1 EXCEPT AS SHOWN

INACTIVE IN PART - SEE NOTE /22/

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS4841

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

(R)

AEROSPACE STANDARD

FITTING, TEE, STANDARD AND REDUCER,
BULKHEAD ON RUN,
FLARED

AS1033
SHEET 1 OF 6

**REV.
D**

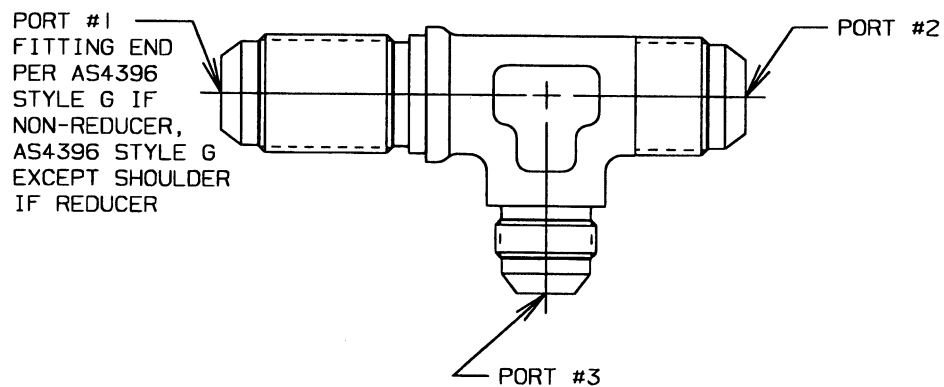


FIGURE 3 - FITTING, TEE, BULKHEAD END FOR USE IN PORT
PORT #3 SHOWN AS REDUCER
SAME AS FIGURE 1 EXCEPT AS SHOWN /21/

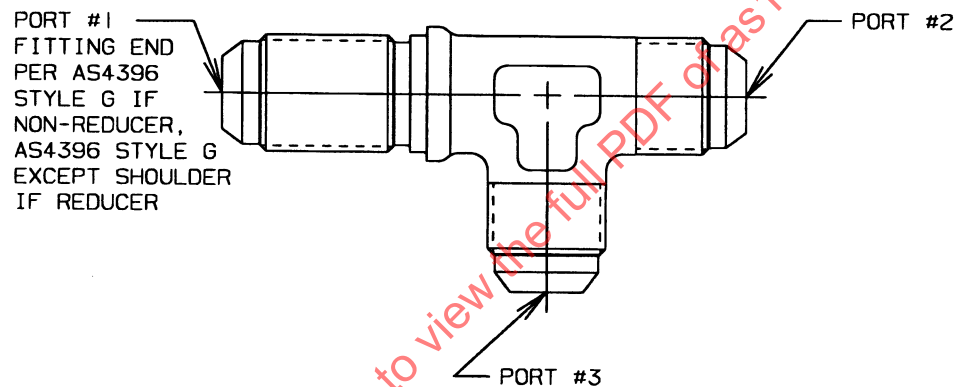


FIGURE 4 - FITTING, TEE, BULKHEAD END FOR USE IN PORT
NON-REDUCER SHOWN
SAME AS FIGURE 2 EXCEPT AS SHOWN /21/

REV.
D

AS1033

TABLE 1 - DIMENSIONS AND WEIGHTS /14/

BASIC NO. AS1033 /12/ /21/ SIZE CODE	C /13/	V	W	LB/EA APPROX REF ALUM	LB/EA APPROX REF CRES	LB/EA APPROX REF TI
02	.851	.297- .314	.090	.0191	.0549	.0303
03	.914	.360- .377	.100	.0269	.0774	.0427
04	.976	.423- .440	.110	.0370	.106	.0586
05	1.039	.485- .502	.120	.0468	.134	.0741
06	1.101	.547- .565	.120	.0589	.169	.0933
08	1.367	.735- .753	.150	.128	.369	.203
10	1.570	.860- .878	.170	.167	.479	.264
12	1.789	1.047-1.065	.185	.302	.867	.478
16	1.945	1.292-1.317	.205	.429	1.23	.679
20	2.180	1.605-1.630	.240	.705	2.02	1.12
24	2.351	1.855-1.880	.250	.925	2.66	1.46
32	2.898	2.542-2.572	.350	2.03	5.82	3.21

TABLE 2 - LEG LENGTH B

FORGING SIZE /12/	TUBE SIZE OF PORT #1 02	TUBE SIZE OF PORT #1 03	TUBE SIZE OF PORT #1 04	TUBE SIZE OF PORT #1 05	TUBE SIZE OF PORT #1 06	TUBE SIZE OF PORT #1 08	TUBE SIZE OF PORT #1 10	TUBE SIZE OF PORT #1 12	TUBE SIZE OF PORT #1 16	TUBE SIZE OF PORT #1 20	TUBE SIZE OF PORT #1 24	TUBE SIZE OF PORT #1 32
02	1.429	-	-	-	-	-	-	-	-	-	-	-
03	1.461	1.461	-	-	-	-	-	-	-	-	-	-
04	1.507	1.507	1.601	-	-	-	-	-	-	-	-	-
05	1.538	1.538	1.632	1.632	-	-	-	-	-	-	-	-
06	1.648	1.648	1.742	1.742	1.820	-	-	-	-	-	-	-
08	1.789	1.789	1.883	1.883	1.961	2.117	-	-	-	-	-	-
10	1.929	1.929	2.023	2.023	2.101	2.257	2.398	-	-	-	-	-
12	2.039	2.039	2.133	2.133	2.211	2.367	2.508	2.679	-	-	-	-
16	2.164	2.164	2.258	2.258	2.336	2.492	2.633	2.804	2.804	-	-	-
20	2.445	2.445	2.539	2.539	2.617	2.773	2.914	3.085	3.085	3.132	-	-
24	2.726	2.726	2.820	2.820	2.898	3.054	3.195	3.366	3.366	3.413	3.429	-
32	3.133	3.133	3.227	3.227	3.305	3.461	3.602	3.773	3.773	3.820	3.836	4.117

AEROSPACE STANDARD

(R) FITTING, TEE, STANDARD AND REDUCER,
BULKHEAD ON RUN,
FLARED

AS1033
SHEET 3 OF 6

REV.
D

REV.
D

AS1033

TABLE 3 - LEG LENGTH D

FORGING SIZE /12/	TUBE SIZE OF PORT #2 OR #3 02	TUBE SIZE OF PORT #2 OR #3 03	TUBE SIZE OF PORT #2 OR #3 04	TUBE SIZE OF PORT #2 OR #3 05	TUBE SIZE OF PORT #2 OR #3 06	TUBE SIZE OF PORT #2 OR #3 08	TUBE SIZE OF PORT #2 OR #3 10	TUBE SIZE OF PORT #2 OR #3 12	TUBE SIZE OF PORT #2 OR #3 16	TUBE SIZE OF PORT #2 OR #3 20	TUBE SIZE OF PORT #2 OR #3 24	TUBE SIZE OF PORT #2 OR #3 32
02	.789	-	-	-	-	-	-	-	-	-	-	-
03	.820	.851	-	-	-	-	-	-	-	-	-	-
04	.820	.843	.914	-	-	-	-	-	-	-	-	-
05	.874	.905	.976	.976	-	-	-	-	-	-	-	-
06	.978	1.009	1.080	1.080	1.086	-	-	-	-	-	-	-
08	1.064	1.095	1.166	1.166	1.172	1.273	-	-	-	-	-	-
10	1.166	1.197	1.268	1.268	1.274	1.375	1.476	-	-	-	-	-
12	1.263	1.294	1.365	1.365	1.371	1.472	1.573	1.679	-	-	-	-
16	1.373	1.404	1.475	1.475	1.481	1.582	1.683	1.789	1.836	-	-	-
20	1.576	1.607	1.678	1.678	1.684	1.785	1.886	1.992	2.039	2.086	-	-
24	1.716	1.747	1.818	1.818	1.824	1.925	2.026	2.132	2.179	2.226	2.351	-
32	2.201	2.232	2.303	2.303	2.309	2.410	2.511	2.617	2.664	2.711	2.836	3.086

TABLE 4 - TUBE SIZE AND CORRESPONDING THREAD

PORT SIZE	(NOMINAL TUBE SIZE)	THREAD PER AS8879 CLASS 3A
02	.125	.3125-24 UNJF
03	.188	.3750-24 UNJF
04	.250	.4375-20 UNJF
05	.312	.5000-20 UNJF
06	.375	.5625-18 UNJF
08	.500	.7500-16 UNJF
10	.625	.8750-14 UNJF
12	.750	1.0625-12 UNJ
16	1.000	1.3125-12 UNJ
20	1.250	1.6250-12 UNJ
24	1.500	1.8750-12 UNJ
32	2.000	2.5000-12 UNJ