

AIR AND AIR/SURFACE (PLATFORM) CARGO PALLETS

1. **PURPOSE:** This Aerospace Standard (AS) provides dimensional, structural and environmental requirements for 8 ft (2.44 m) wide pallets to be used in freighter versions of high capacity fixed wing aircraft equipped with NAS 3610 Class II (1.5G) restraint systems and is intended to be compatible with the 8 x 8 ft (2,44 x 2,44 m) cross-section containers described in AS 832. The Type C adapter pallet is intended to be compatible with 8 x 8 ft (2,44 x 2,44) cross section containers described in ANSI MH 5.1, Cargo Containers & ISO 1496 Series 1, Freight Containers. Pallet nets used in conjunction with these pallets are described in AS 1131. The minimum essential criteria are identified by use of the key word "shall". Recommended criteria are identified by use of the key word "should", and while not mandatory, are considered to be of primary importance in providing serviceable, economical and practical air transport pallets. Deviation from recommended criteria should occur only after careful consideration, extensive testing and thorough service evaluation have shown alternate methods to be satisfactory.

1.1 **Reference Documents:**

1.1.1 AS 1131, Air-Land Cargo Pallet Nets

1.1.2 NAS 3610, Cargo Unit Load Devices, Specification for.

Aerospace Industries Association of America, Inc.
1725 DeSales Street N.W.
Washington, D.C. 20036

1.1.3 MS33601A, Track & Stud Fitting for Cargo Transport Aircraft, Standard Dimensions for

1.1.4 IATA 50/9, 20 Ft Pallet for NAS 3610 Class II Restraint System.
International Air Transport Assoc., 2000 Peel Street, Montreal, Quebec,
Canada H3A 2R4

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS 1130D

- 1.1.5 United States Federal Test Method Standard 406, Plastics - Methods of Testing. Available from Specification Sales, Bldg. 197, Washington Navy Yard, General Services Administration, Washington, D.C. 20407.
- 1.1.6 AS 832, Air & Air/Surface (Intermodal) General Purpose Containers.
- 1.1.7 American National Standard (ANSI) MH5.1, Basic Requirements for Cargo Containers.
- 1.1.8 ISO 1496/1, Series 1 Freight Containers - Specification & Testing - Part 1: General Cargo Containers
- 1.1.9 Federal Aviation Regulation (FAR) Part 25, United States Department of Transportation.

2. SCOPE:

- 2.1 This AS establishes three classes of pallets: Type A, Air only; B, Platform (Air/Surface Intermodal); and C, Adapter.
- 2.2 Pallets will have nominal dimensions, of 8 ft wide and lengths of 10, 20, 30 and 40 feet (2,44 x 3,05/6,10/9, 14/12,2 m) and are covered by NAS 3610 codes 2FIP, 2GIP, 2HIP and 2JIP.
- 2.3 Air-Only pallets (Type A) will normally be on aircraft equivalent roller conveying systems and/or on similarly equipped ancillary ground handling devices.
- 2.4 Platform Pallets (Type B) are suitable for Air/Surface handling and transport systems. Supplementary requirements for Type B version are found in Section 4.
- 2.5 Air Adapter Pallets (Type C) are for use to adapt 8 x 8 ft surface mode only containers for air transport. Supplementary requirements for Type C version are found in Section 5.

NOTE: Use of the adapter pallet with surface mode only 8 x 8 ft containers may require uniform load distribution on the base cross members of these containers for carriage on certain aircraft. The Aircraft Approved Weight and Balance Manual should be referred to for loadability procedures and/or limitations.

3. BASIC REQUIREMENTS:

- 3.1 External dimensions and pallets shall be as specified in Table I and Figure 1. Diagonal tolerance shall be as specified in Table II.
- 3.2 Construction:
 - 3.2.1 Pallet construction shall be rugged, weatherproof, minimizing maintenance and original cost by having no moving parts.

3.2.2 All fittings and appurtenances shall be within the maximum outside dimensions of the pallet.

3.2.2.1 Mating devices that support, transfer position and secure pallets shall be provided by transportation carriers, transferring equipment or terminal facilities.

3.2.3 Pallet construction shall have sufficient structural strength to withstand without permanent deformation the static and dynamic loads and the impact shock encountered in normal carrier service.

3.3 Pallet Surfaces:

3.3.1 The top and bottom surfaces of the pallet shall be parallel, flat and continuous.

3.3.1.1 For the length of the pallet the bottom surface shall have a smooth to a flat plane within .0625 in. (1,6 mm). This shall allow for a waviness factor of crest to crest at a pitch of 36 in. (914 mm) minimum.

3.3.2 No structure shall protrude below the lower surface.

3.3.3 Construction:

3.3.3.1 The pallet edges (Length "L") shall have a nominal thickness of 2 in. (50,8 mm) from the lower surface. This thickness may be varied when the design employed results in a lighter and more durable structure capable of accepting uniform loading of 400 lb per sq ft (1 953 kg per sq meter) when supported on conveying system per 3.3.3.3.

3.3.3.2 The pallet shall be enclosed on all four sides by an edge member conforming to Figures 2, 3 and 4. The vertical surface of the pallet edge between the restraint provisions shown in Figures 3 and 4, Section A-A, Type A and B pallets, shall be smooth and continuous to provide automatically latching aircraft systems interface.

- The pallet bottom skin shall be enclosed by its edge extrusion.
- The bottom surface shall be flush with the edge member.
- The lower edge of the edge members shall be as shown in Figure 4.
- The pallet corners shall have a $2.50 \pm .50$ (63,5 $\pm$ 12,7 mm) radius in the plane of the pallet.
- Pallet corners should be readily replaceable when built as a separate bolted or rivetted on part.

3.3.3.3 The pallet design shall provide for support and ease of movement at the rated distributed load on minimum conveyor systems as described in the following:

- Four rows of rollers approximately equally spaced over a minimum width of 76 in. (1 930,4 mm) measured between centers with each row composed of 1.5 in. (38 mm) diameter rollers 3 in. (76,2 mm) long uncrowned with edge radius of 0.06 in. (1,6 mm) R, spaced on 10 in. (254 mm) centers. Pallet travels perpendicular to roller axis.
- Swivel casters with 1 in. (25 mm) diameter wheels having a contact length of 2 in. (51 mm) located on a 12 x 12 in. (305 x 305 mm) grid pattern. Pallet travel is in all directions across grid.
- Ball transfer units with 1 in. (25 mm) diameter balls located on a 5 x 5 in. (127 x 127 mm) grid pattern. Pallet travel is in all directions across grid.

3.3.3.4 The pallet lower surface shall comply with the following conditions:

- Ball indentation per 6.2.
- Ball casters per 6.3.
- Abrasion per 6.4.

3.3.4 Net attachments shall be per MS33601A as shown in Figures 1 and 5. As an option, a continuous seat track per MS33601A may be incorporated in the pallet upper surface for net or strap attachments.

3.4 Aircraft Restraint Provision: Restraint provision as shown in Figures 2, 3 and 4 shall be provided.

3.5 Complete Assembly:

3.5.1 Pallet shall be capable of traversing a 2 deg (0.035 rad) crest or valley with no permanent deformation or damage.

3.5.1.1 To meet this condition pallets uniformly loaded to gross weight shall be capable of being supported at the cresting point through a roller contact of 80 in. (2 032 mm) minimum width with a roller of 1.5 in. (38 mm) maximum diameter.

3.5.2 Pallet construction shall be free of any recesses or voids in which cargo (or other material) can be concealed. To meet agricultural requirements all pallet surfaces should be as free as possible of recesses and protuberances, where pests can hide, or where soil or other residues can accumulate.

3.5.3 The pallet shall withstand without permanent deformation a forklift wheel load of 6000 lb (2 721,5 kg) on each of two wheels on 30 in. (762 mm) centers anywhere on the pallet while resting on a surface of sufficient strength and continuity to adequately support the pallet.

3.5.4 The minimum pallet core stiffness shall be 27,900 lb./in² per inch (3150 Nm² per meter) width of the core.

3.6 Ratings:

3.6.1 The pallet shall be designed for the following gross weights:

3.6.1.1 10 ft pallet 12,500 lb (5 679 kg).

3.6.1.2 20 ft pallet 25,000 lb (11 338 kg).

3.6.1.3 30 ft pallet 35,000 lb (15 873 kg).

3.6.1.4 40 ft pallet 45,000 lb (20 408 kg).

3.6.2 Pallets over 10 ft (3,05 m) length shall be designed for a gross weight of 14,900 lb (6 759 kg) in any 10 ft (3,05 m) section of the pallet.

3.7 Design Loads:

3.7.1 Table of Loads: The pallet assembly will be used in conjunction with a net per AS 1131 to restrain the loads listed below:

NAS 3610 Code Sizes		Dimensions	Maximum Gross Loads
2 FIP	96 x	117.75 (2438 x 2991 mm)	12,500 Lb. (5669 kg)
2 GIP	96 x	238.50 (2438 x 6058 mm)	25,000 Lb. (11338 kg)
2 HIP	96 x	359.25 (2438 x 9125 mm)	35,000 Lb. (15873 kg)
2 JIP	96 x	480 (2438 x 12192 mm)	45,000 Lb. (20408 kg)

3.7.2 Ultimate Loads: The pallet assembly shall be designed to the ultimate load per NAS 3610 while supported on a roller system in accordance with 3.3.3.3 with the cargo center of gravity located at any point in the range specified in 3.7.6. Under these loads the pallet may exhibit permanent deformation, but shall not rupture to the extent of discharging cargo.

3.7.3 Fore and aft loads shall be reacted by a latch per Figure 11 inserted in the restraint slots as shown in Figures 3 and 4. The minimum latches required, either on one or both sides of the pallet, are as follows:

3.7.3.1 10 ft pallet - 2 latches

AS 1130D

3.7.3.1.1 20 ft pallet - 5 latches

3.7.3.1.2 30 ft pallet - 8 latches

3.7.3.1.3 40 ft pallet - 11 latches

3.7.3.2 The ultimate fore and aft load for any slot shall be 18,750 lb (8340 daN).

3.7.3.3 The fore and aft load bearing slots shall be considered to be either on one or both sides of the pallet.

3.7.4 Up load shall be reacted by a latch per Figure 12 inserted in the side restraint slots as shown in Figures 3 and 4.

The minimum vertical restraint latches required, equally distributed on both sides and equally spaced along the full length of the pallet, are as follows. This includes the fore and aft restraint latches.

3.7.4.1 10 ft pallet - 6 latches

3.7.4.2 20 ft pallet - 12 latches

3.7.4.3 30 ft pallet - 18 latches

3.7.4.4 40 ft pallet - 24 latches

3.7.5 End slots shall be provided in accordance with Figure 2.

3.7.5.1 Slots shall be designed to restrain a 10 ft (3.05 m) pallet for ultimate forward, aft and vertical up loads when used in conjunction with restraint fittings in accordance with Figure 10.

3.7.5.2 Slots to be used for Ground Transport Restraint on Roller Bed Vehicles shall be provided as shown in Figure 2. The inner face of each outward slot (or block) shall be capable of restraining laterally 33% of the maximum unit gross weight. The pallet lower edge member shall be capable of restraining an upward load of 20% of the maximum unit gross weight in the slot area.

3.7.6 Center of gravity shall be assumed to vary:

3.7.6.1 Plus and minus 10% of the pallet width measured from the centerline.

3.7.6.2 Plus and minus 5% of the pallet length measured from the centerline.

3.7.6.3 Forty-eight in. (1 219,2 mm) vertically measured from pallet bottom surface.

3.7.6.4 To achieve above asymmetric conditions, cargo density shall be assumed to vary linearly.

3.7.7 Each of the four base corners of the pallet shall be capable of reacting a 18,750 lb (8340 daN) in either the longitudinal or lateral direction.

3.7.8 The cargo net attachment fittings shall include the provision for attaching a cargo tie down fitting, each capable of reacting a 5000 lb (2 224 daN) ultimate load in any direction.

4. SUPPLEMENTAL REQUIREMENTS FOR AIR/LAND PALLETS:

4.1 B Pallet Types:

4.1.1 Type IB shall incorporate fittings at the four corners conforming to Figure 7.

4.1.2 Type IIB are 10 and 20 ft pallets only and shall incorporate forklift tineways located per Figure 9 and fittings at the four corners conforming to Figure 7.

4.2 Ground Operational Loads:

4.2.1 The Type B pallets shall be capable of withstanding without permanent deformation a uniformly distributed down load equal to twice the maximum unit gross weight while supported by slings or frame connected to the four corner fittings.

4.2.2 Type IIB pallets shall be capable of withstanding a down load equal to 1.25 the maximum unit gross weight while supported by a forklift truck.

4.2.3 Each of the four corners shall be capable of reacting at least an 18,750 lb (8340 daN) load in either the longitudinal or latitudinal direction.

4.3 The pallet edges (length "L") shall have a minimum thickness of 5.5 in. (139,7 mm) from the lower surface.

5. SUPPLEMENTAL REQUIREMENTS FOR AIR ADAPTER PALLETS:

5.1 C Pallet Type:

5.1.1 The pallet shall incorporate alignment pegs at the four corners conforming to Figure 14. Each of the alignment pegs shall be capable of reacting at least an 18,750 lb. (8340 daN) load in the longitudinal, lateral and vertical (down only) direction.

5.1.2 The pallet shall incorporate side slots and strap receptacles conforming to Figure 13. See Figure 15 for typical usage of restraint straps to secure a surface mode container to adapter pallet.

5.1.2.1 The strap receptacle fitting shall include the provision for attaching a tie-down fitting, each capable of reacting a 5000 lb. (2224 daN) ultimate load in the longitudinal and vertical direction.

- 5.1.3 The pallet edges shall have a nominal thickness of 2.25 in. (57 mm) from the lower surface.
- 5.1.4 The pallet shall be enclosed on all four sides by an edge member conforming to Figures 2, 3, 4 and 13.
- 5.1.5 The pallet corners shall have a .56 inch (14,5 mm) radius.
- 5.1.6 Aircraft restraint provisions as shown in Figures 2, 3, 4, and 13 shall be provided.
- 5.1.7 Up, fore and aft loads shall be reacted by a fitting inserted in the restraint slots shown in Figures 3, 4, and 13.

6. ENVIRONMENTAL CRITERIA:

6.1 Materials:

- 6.1.1 The pallet should be designed and built using materials which will provide maximum serviceability and protection of contents under intended environmental conditions, and shall meet the appropriate provision of Federal Aviation Regulations per FAR Part 25.
- 6.1.2 The structural and operational integrity of the pallet shall be maintained in a temperature environment from -65°F to +160°F (-54°C to +71°C).
- 6.1.3 All components of the pallet shall be protected against deterioration or loss of strength in service due to weathering, corrosion or other causes where the type of material used required such protection.
- 6.1.4 The pallet shall be so designed that it will withstand handling common to air/land freight terminal and ramp operations.

6.2 Ball Load Capability: The pallet base surface or a representative portion thereof shall be subjected to 900 lb (408 kg) on a one-inch (25 mm) diameter steel ball without permanent indentation in excess of 0.020 in. (0,51 mm).

6.3 Ball Caster Load Capability: The base or a representative portion thereof shall be subjected to a uniformly distributed load of 210 lb (95,5 kg), supported by four 1-in. (25 mm) diameter steel ball casters on a 5 in. (127 mm) grid pattern. The base shall be moved over the casters for a minimum of 5,000 passes along a fixed line in each of two directions, 90 deg. (1.57 rad.) to, and intersecting each other. The length of the stroke shall be approximately 12 in. (305 mm). At the conclusion of the test, there shall be no evidence of deterioration of the base/ball caster interface surface.

- 6.4 Abrasion Resistance for Plastic Coated or Magnesium-Base Materials: Three samples of the pallet base assembly material will be subjected to a test method equivalent to United States Federal Test Method Standard No. 406, Method 1091, except the abrasion wheel shall be dressed every 1,000 cycles. A CS-10 wheel with a load of 500 grams shall be used for all tests. The average of weight loss shall not exceed the following values:

After 1,000 Revolutions - 0.015 Grams
After 2,000 Revolutions - An additional 0.005 Grams
After 5,000 Revolutions - An additional 0.030 Grams
Up to a TOTAL of 0.050 Grams

- 6.5 Weight Limits: The tare weight of the pallet assembly shall be a minimum consistent with the requirements and within limits of sound design practices.

6.6 Materials and Processes:

- 6.6.1 The materials and processes selected should give consideration to the extremely hard usage to which the pallet will be subjected to provide for maximum service life. All metal parts should be suitably protected against corrosion. All non-metallic materials which are liquid absorbent should be sealed or treated to prevent liquid absorption.
- 6.6.2 Materials shall be flame resistant in accordance with the regulatory requirements.
- 6.6.3 All fasteners should be of aircraft standard and the number of sizes, styles and strengths shall be kept to a minimum. No slotted head screws shall be used.

7. TESTING REQUIREMENTS:

7.1 Scope:

- 7.1.1 The tests are static in nature to minimize complexity and cost of required testing facilities. As far as practical, applied static loads take into account the combined static and dynamic loads anticipated in service.
- 7.1.2 It is intended that tests shall be non-destructive in nature and not result in damage to the pallet unless ultimate load conditions are employed.
- 7.1.3 Test equipment and methods of testing described are not meant to be restrictive. Alternate equivalent methods to accomplish the desired result may be employed.
- 7.1.4 In selected cases, tests may be repeated under ultimate load conditions when required for substantiation of analytical data. If this becomes necessary, the pallet so tested may not be used in service until all component parts are inspected and those that exhibit permanent deformation are replaced.

7.2 Test Criteria:

- 7.2.1 A pallet shall be considered satisfactory if, upon inspection before and after testing, its dimensions fall within those specified in Tables I and II and in applicable manufacturing drawings.
- 7.2.2 Permanent deformation is permitted under ultimate load conditions. A pallet shall be considered within acceptable limits if it exhibits permanent deformation but does not rupture to the extend of discharging cargo or break free from the restraint system.

7.3 Recommended Test Equipment:

- 7.3.1 When restraint or movement on an aircraft system is evaluated, the test system shall be in accordance with 3.3.3.3. Latches and guide-rails of suitable strength shall be provided to guide the pallet along the conveyor and secure it at its latch points. The test system shall be of sufficient length to permit cycling of the longest pallet to be tested.
- 7.3.2 When conducting structural test, sufficient payload to meet test load requirements shall be provided. Where appropriate, water or load producing devices may be used.
- 7.3.3 An industrial truck or equivalent equipment capable of a maximum load of 12,000 lb (5 443 kg) on one axle with a minimum wheel width of 7 in. (178 mm) and a maximum footprint area of 22 sq. in. (142 sq cm) per wheel on 30 in. (762 mm) wheel centers shall be provided.
- 7.3.4 A net per AS 1131 shall be provided.
- 7.3.5 For Type B pallets a crane or lifting means with capacity to lift twice the gross weight of the loaded pallet shall be provided. Sufficient height shall exist under the hook to permit positioning the pallet vertically on either side or end. Bridle chains, cables or spreaders with capacity to lift the loaded pallet at the four corners with appropriate capacity hooks or shackles shall be provided.

7.4 Test Procedure - Operational Loads:

7.4.1 Test 1 - Lifting:

- 7.4.1.1 Type B pallets shall be loaded to twice gross weight and lifted vertically from the four corner fittings. After lifting, the pallet shall be suspended for not less than five minutes and then lowered to the ground. Permanent deformation shall not occur.

7.4.1.2 Type IIB pallets shall be uniformly loaded to 1.25 gross weight and lifted clear of the ground. The pallet shall be supported on two horizontal bars, each 8 in. (200 mm) wide projecting $72 + 1/8$ in ($1828 + 3$ mm) into the fork lift pocket. The bars shall be centered within the pockets. After lifting, the pallet shall be suspended for not less than five minutes and then lowered to the ground. Permanent deformation shall not occur.

7.4.2 Test 2 - Pallet Strength:

7.4.2.1 Pallets shall have the base resting on a surface of sufficient strength and continuity to adequately support the pallet. An industrial forklift loaded to an axle weight of not less than 12,000 lb (5 443 kg) (including the weight of the truck) or 6,000 lb (2 722 kg) per wheel, applied to a contact area not greater than 22 sq in. (142 sq cm) assuming a wheel width of not less than 7 in. (178 mm) and wheel centers of 30 in. (762 mm) shall then be maneuvered over the pallet. The path of the test vehicle shall be patterned over the entire top surface area of the pallet. One cycle is defined as the test vehicle driving onto the pallet, traveling its entire length and driving off the pallet from the drive on end. This maneuver shall be repeated for 100 cycles.

7.4.2.1.1 No permanent deformation or failure shall occur.

7.4.2.2 While retained on the aircraft loading system or its equivalent, the pallet shall be uniformly loaded to 1,200 lb per sq ft (5 864 kg/m²). The load shall be applied to an area 5 ft (1,52 m) wide centered in the pallet and the load shall equal but not exceed three times maximum payload.

7.4.2.2.1 No permanent deformation or failure shall occur.

7.4.2.3 The pallet under test shall be latched to the aircraft system or its equivalent. The number of latches shown in 3.7.3 shall be engaged on one side and adjusted by suitable means to assure contact with the end of the latch, receptacle slot. With a net per AS 1131 attached to the pallet, a uniformly distributed load equal to the gross weight shall be applied to one 96 in. (2,438 mm) end of the net. The center of gravity of the load shall be 48 in. (1,219 mm) vertically measured from the pallet bottom surface and within the lateral and longitudinal limits specified in 3.7.6.

7.4.2.3.1 No permanent deformation or failure shall occur.

7.4.2.3.2 Repeat 7.4.2.3 for 10 ft (3,05 m) pallet using only restraints in fore and aft slots in accordance with Figure 10.

7.4.2.4 With the pallet on the aircraft system or its equivalent, the number of latches shown in 3.7.4 per Figure 12 equally distributed on both sides shall be engaged and adjusted by suitable means to assure vertical restraint. With a net per AS 1131 attached to the pallet, a uniformly distributed load equal to the gross weight shall be applied to one side of the net. The center of gravity of the load shall be 48 in. (1 219 mm) vertically measured from the pallet bottom surface and within the lateral and longitudinal limits specified in 3.7.6.

7.4.2.4.1 No permanent deformation or failure shall occur.

7.4.2.5 The pallet shall be suspended upside down from the aircraft loading system or its equivalent. The number of latches shown in 3.7.4 per Figure 12 distributed on both sides shall be engaged and adjusted by suitable means to assure contact when the load is applied. The pallet shall have a load equal to the gross weight uniformly distributed tied down with a net per AS 1131.

7.4.2.5.1 No permanent deformation or damage shall occur.

7.4.2.6 Test per 7.4.2.5 shall be repeated for 10 ft pallets using only restraint in accordance with Figure 10.

7.4.2.7 The pallet shall be uniformly loaded to gross weight and cycled one hundred times over a substantially level test system per 3.3.3.3 at a minimum speed of 60 ft (18,3 m) per minute.

7.4.2.7.1 The test section shall be supported on a rigid, welded steel, wood or concrete structure.

7.4.2.7.2 The rollers used in the test section shall conform to 3.3.3.3. Shell of the roller shall be a high quality aluminum alloy. Bearing used in rollers shall be selected to ensure test set-up coefficient of friction does not exceed .02 at 1.0g loading.

7.4.2.7.3 Maximum displacement of roller top from a theoretical plane should be varied randomly to a maximum of $\pm .03$ in. ($\pm .76$ mm).

7.4.2.7.4 Each cycle shall be equal to twice container length.

7.4.2.7.5 At test speed or at breakaway, draw-bar pull shall be recorded periodically. Maximum allowable draw-bar pull shall not exceed 3% of the pallet gross weight at test speed or 5% of the pallet gross weight at breakaway. Maximum variation of draw-bar pull from the first to the last cycle shall not exceed 0.5% of gross weight.

7.4.2.8 The pallet under test shall be secured to a rigid base using only latches in accordance with Figure 10 engaged in the fore and aft ground transport slots shown in Figure 2. The latches shall be adjusted by suitable means to insure restraint and contact with the inner face of each outward slot.

7.4.2.8 (Continued):

The pallet shall have a test load equal to .33 gross weight applied horizontally in an inward direction to each inner face on one of the outward slots. Simultaneously, a test load equal to .20 gross weight shall be applied vertically in an upward direction to the pallet edge member in the opposite slot area. The test loads shall be applied to both ends of the pallet. The test shall be repeated in the opposite slots unless the slots and edge members are identical.

7.4.2.8.1 No permanent deformation or damage shall occur.

7.4.2.9 Attachment Receptacle Test:

7.4.2.9.1 Cargo Tie Down: A two stud bulk cargo tiedown fitting shall be used to fit the receptacle or optional track shown in Figure 5. With the pallet latched to the aircraft system or its equivalent, 50% to 60% of all the latches equally distributed on both sides shall be engaged and adjusted by suitable means to assure vertical restraint. The pallet receptacle or optional track shall be tested by applying a 5,000 lb (2224 daN) tension load in all directions, horizontal to vertical. The load applications point shall be 0.83 in. (21 mm) or less from the head of the stud.

7.4.2.9.2 Net Attachment: A one-stud net attachment fitting as shown in Figure 5 shall be engaged in the net attachment receptacle or optional track shown in Figure 5. The pallet receptacle or optional track shall be tested by applying a 2,000 lb (890 daN) tension load in all directions, horizontal to vertical. The load application point shall be 0.83 in. (21 mm) or less from the head of the stud.

7.4.2.9.3 Strap Attachment, Type C Pallet: A two stud bulk cargo tie-down fitting shall be used to fit the receptacle or optional track shown in Figures 5 and 13 and the test per 7.4.2.9.1 repeated.

7.4.2.10 For Type B pallets while supported at the four corners.

7.4.2.10.1 Repeat Test 7.4.2.1.

7.4.2.10.2 No permanent deformation or damage shall occur.

7.4.3 Subject any parts that cannot be adequately protected against corrosion to a test duplicating the anticipated environment. Subsequent corrosion shall not preclude the parts from performing their design functions or incur failure of pallet during the design life of the pallet.

7.4.4 The pallet shall be placed empty in a suitable test chamber at 160°F (71°C) ambient temperature for 48 hours.

- 7.4.4.1 At the end of 48 hours, its condition shall be evaluated while the structure is at or near the test temperature.
- 7.4.4.2 The pallet shall then be placed empty in a suitable test chamber in a -65°F (-54°C) ambient temperature for 48 hours.
- 7.4.4.3 At the end of 48 hours, its condition shall be evaluated while the structure is at or near the test temperature.

7.5 Production Pallets: To show compliance with its specification standard, commercial inspection and quality control methods and practices shall be used to assure that production units are not inferior to the article tested. Where changes are made to production units and product similarity cannot be clearly established, the first product so changed shall be retested to show compliance with its specification.

8. MARKING REQUIREMENTS:

- 8.1 All pallets covered by this specification shall be marked in accordance with the requirements of NAS 3610 Clause 3.5.
- 8.2 The following additional markings should also be included. The markings shall be permanently engraved onto the top surface not more than 25.4 mm (one inch) from the outer edge of the aircraft pallet. The engraving should be positioned on two sides diagonally opposite to one another within 305 mm (12 inches) from the corner. The letter size shall be large enough to ensure good readability.

I.D. Code _____ Min. Letter Height 6 mm (.25 in.)
Manufacturer _____ Mfg. P/N _____
(Name & Country)

NOTE: The I.D. Code is an international unit marking system consisting of:

- 1) 3 digits (alpha) for the type and size code.
- 2) 4 digits (numeric) for individual serial number.
- 3) 2 digits (alpha) for owner code (airline or non-airline)

I.D. codes are assigned by the U.L.D. Registrar, International Air Transport Association, 2000 Peel Street, Montreal, Quebec, Canada H3A 2R4.

PREPARED BY
SAE SUBCOMMITTEE AGE-2A,
CARGO HANDLING OF
SAE COMMITTEE AGE-2,
AIR CARGO & AIRCRAFT GROUND EQUIPMENT & SYSTEMS

TABLE 1

PALLET DIMENSIONS

OVERALL LENGTH		OVERALL WIDTH		NOMINAL THICKNESS	DIM. A		DIM. B		DIM. C		DIM. D	
in.	mm	in.	mm		in.	mm	in.	mm	in.	mm	in.	mm
480	+0	+0	+0		9.42	239,27	15.43	391,92	9.37	238,00	16.50	419,10
	12 192	2 438	2 438									
	-3/8	-9,5	-4,8									
359-1/4	+0	+0	+0		9.42	239,27	15.43	391,92	9.37	238,00	16.90	429,26
	9 125	2 438	2 438									
	-3/8	-9,5	-4,8									
238-1/2	+0	+0	+0		9.42	239,27	15.43	391,92	9.37	238,00	17.02	432,31
	6 058	2 438	2 438									
	-1/4	-6,4	-4,8									
117-3/4	+0	+0	+0		9.42	239,27	15.43	391,92	9.37	238,00	16.47	418,34
	2 991	2 438	2 438									
	-3/16	-4,8	-4,8									

See Figure 1 for dimension locations.



For Type A 2.0 inches (50,8 mm)

For Type B 5.5 inches (139,7 mm)

For Type C 2.25 inches (57,2 mm)

TABLE 11

DIAGONAL TOLERANCES - TYPE B & C PALLETS

OVERALL LENGTH		S		P		K ₁ MAX	
in.	mm	in.	mm	in.	mm	in.	mm
480	12 192	472	11 988,8	89	2 260,6	3/4	19
359-1/4	9 125	351-1/4	8 921,7	89	2 260,6	5/8	15,9
238-1/2	6 058	230-1/4	5 848,4	89	2 260,6	1/2	12,7
117-3/4	2 991	109-3/4	2 787,6	89	2 260,6	3/8	9,5

For definitions of S, P and D, see Figure 8

$$K_1 = D_1 - D_2$$

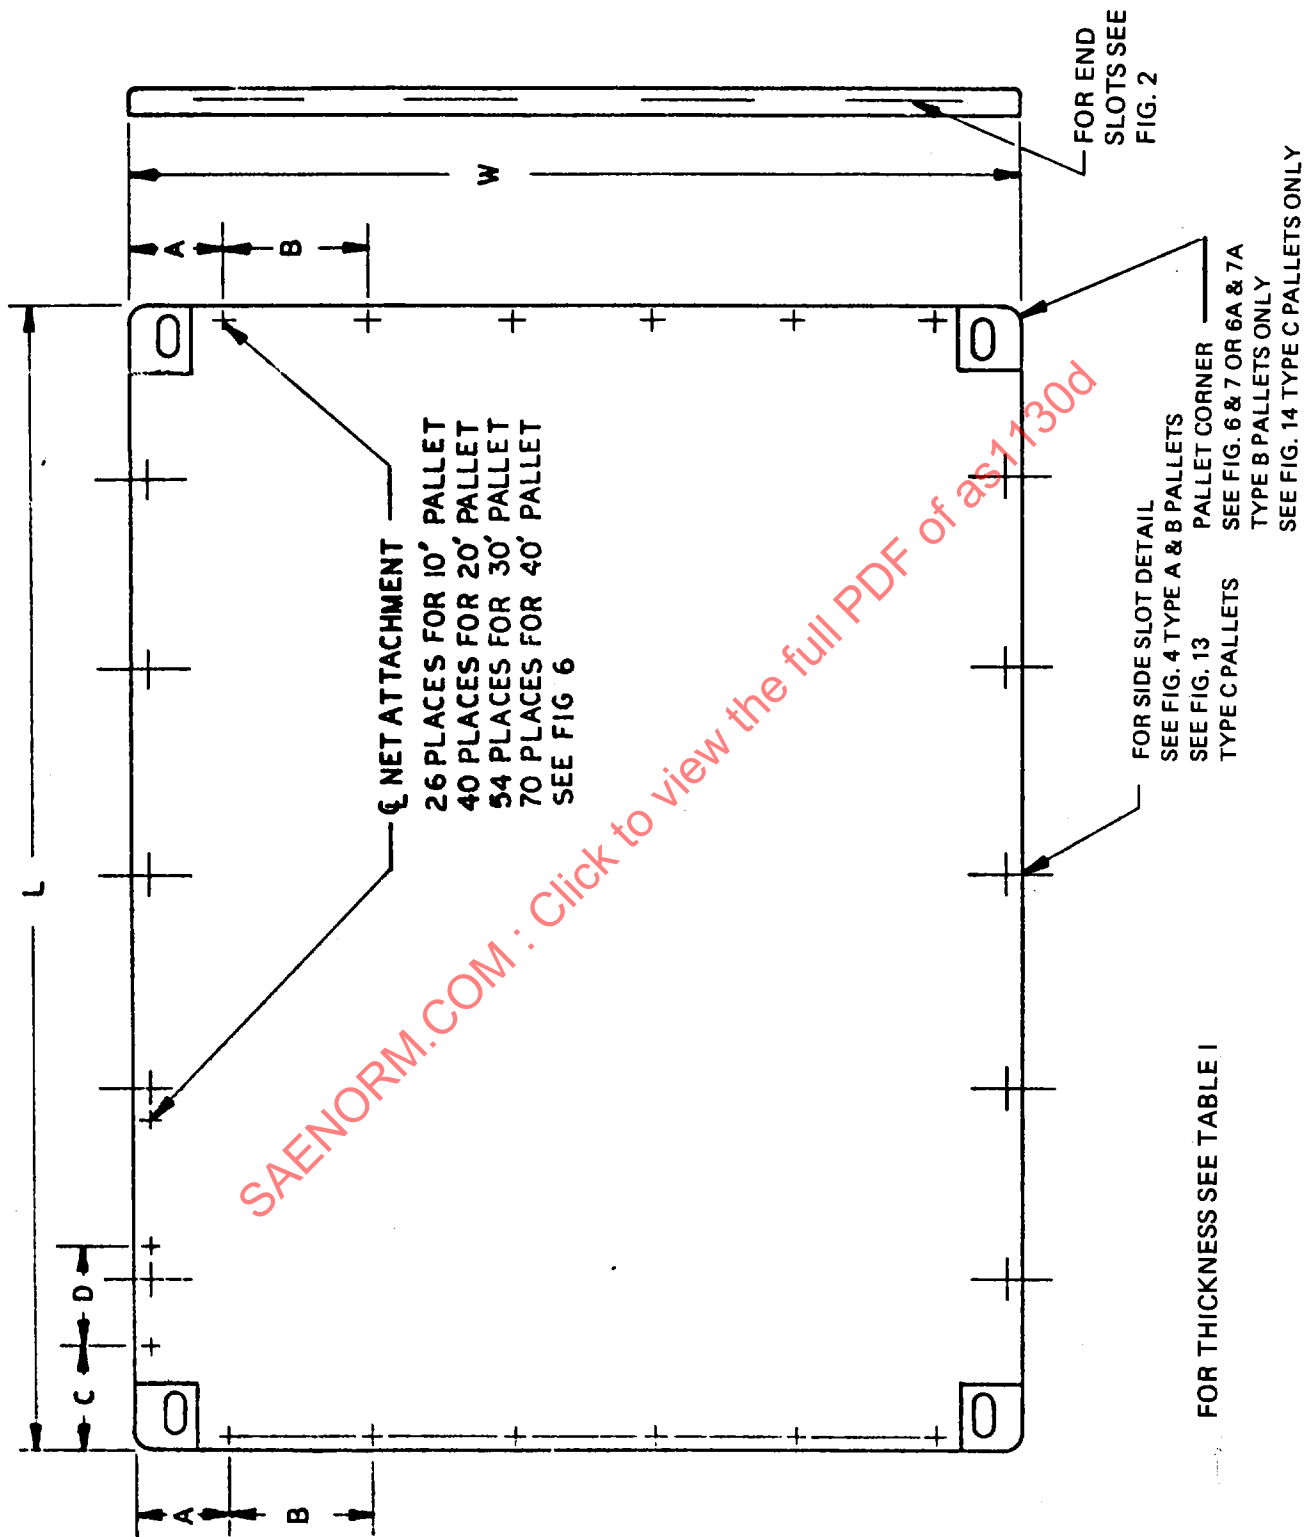


FIGURE 1

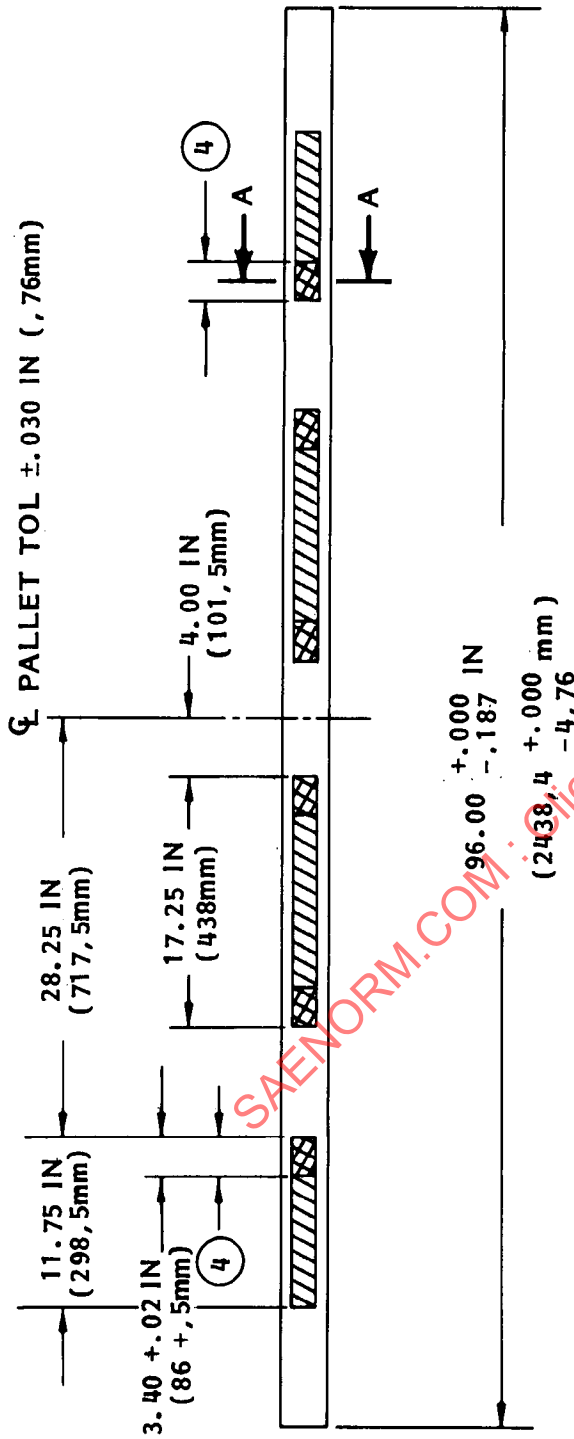


FIGURE 2: END SLOTS OR BLOCKS (BOTH SIDES)


1 TOL ± 0.030 IN UNLESS OTHERWISE (± 76 mm) NOTED

2 SLOTS ARE INDICATED THUS:

3 OPTIONAL SLOT SIZES ARE INDICATED THUS:


4 SLOTS TO BE USED FOR GROUND TRANSPORT RESTRAINT. AREA SHOWN TO BE CLEAR FOR AIRCRAFT/GROUND EQUIPMENT LOCK INTERFACE.

FOR PROFILE SEE SECT AA FIG 3

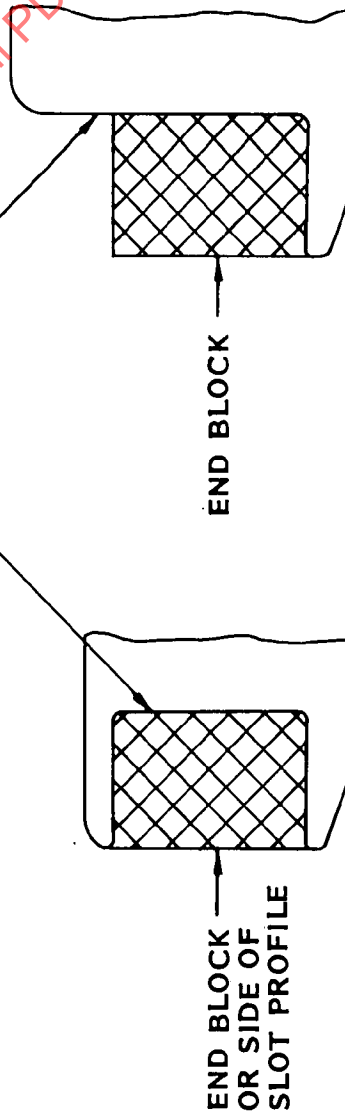


SECTION A-A
TYPE A&B PALLETS

SECTION A-A TYPE C PALLETS
OPTIONAL TYPE A&B PALLETS

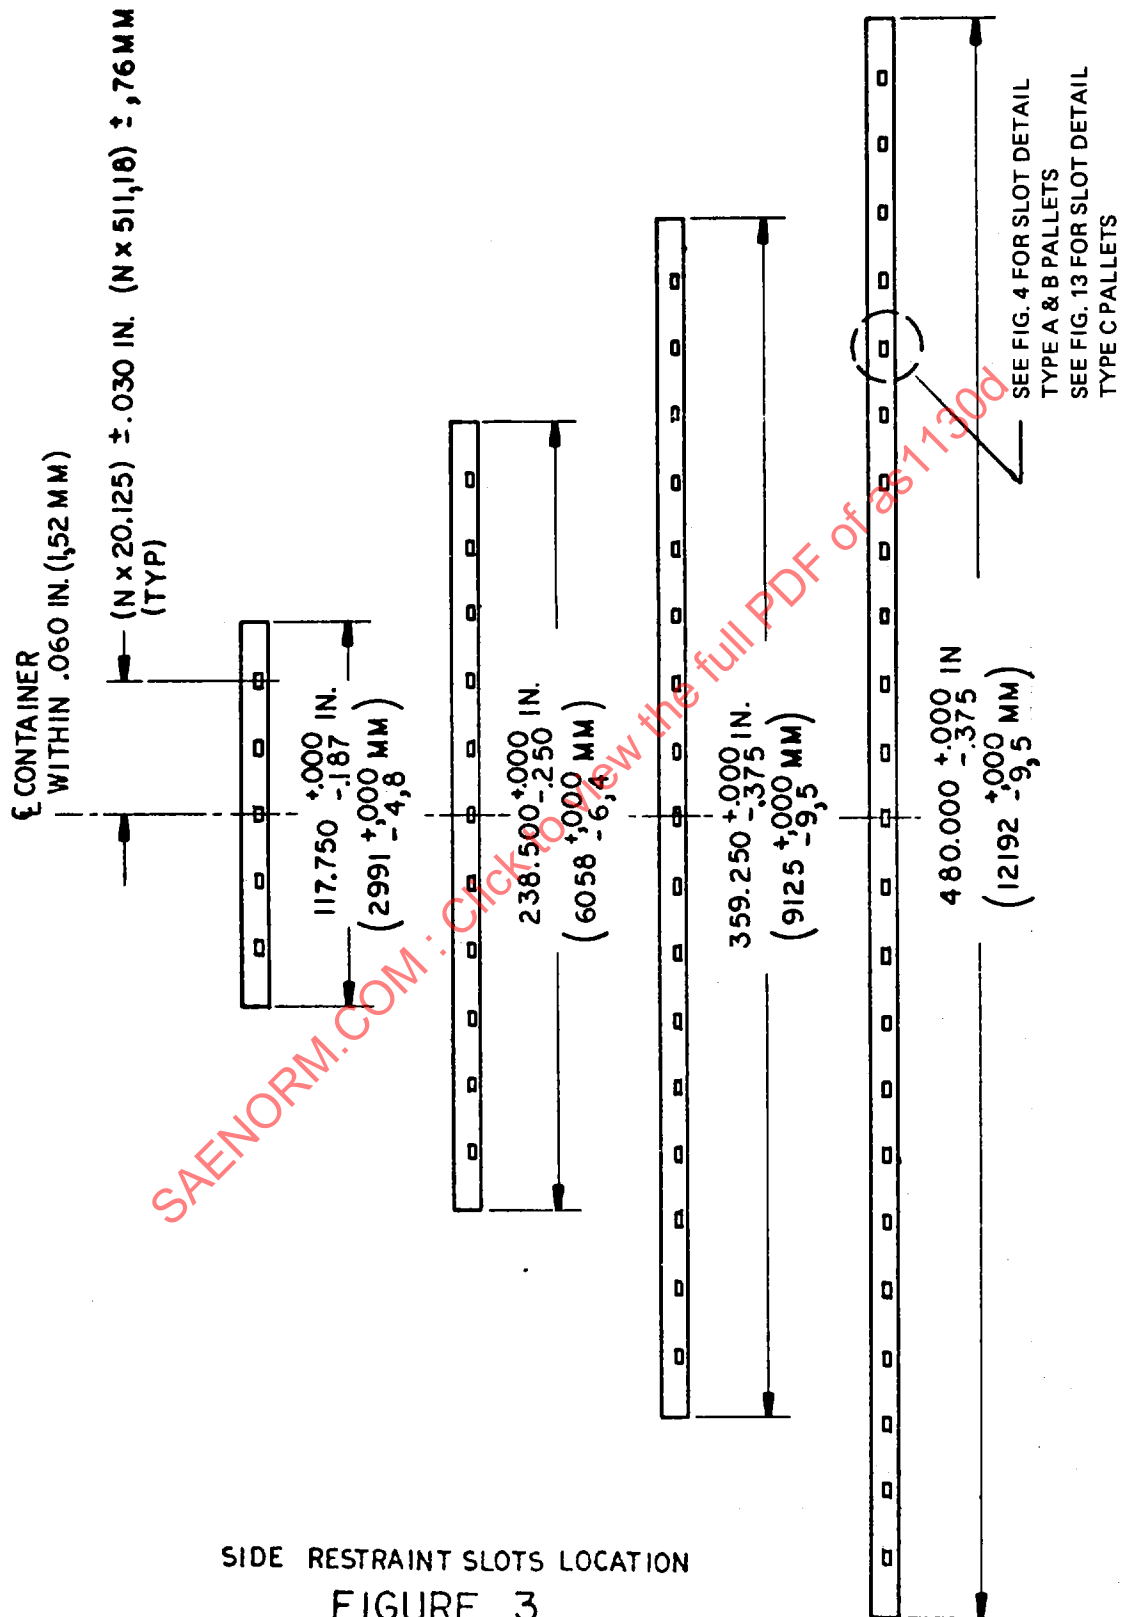


SIDE RESTRAINT SLOTS LOCATION
FIGURE 3


SAENORM.COM: Click to view the full PDF of as1130d

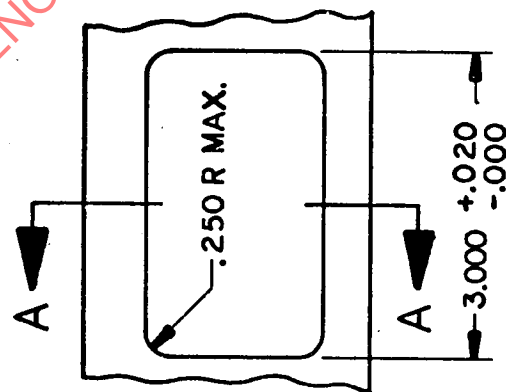

SIDE SLOT DETAIL
TYPE A & B PALLETS
SEE FIG. 13 FOR TYPE
C PALLETS



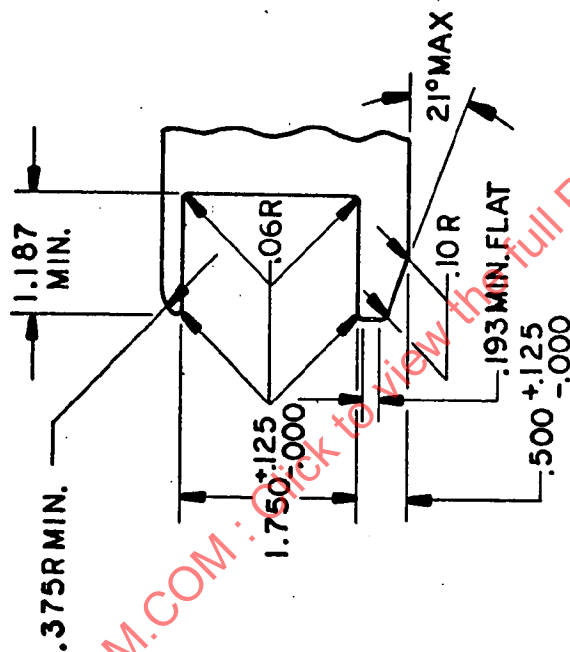


SECTION A-A
TYPE A & B PALLETS



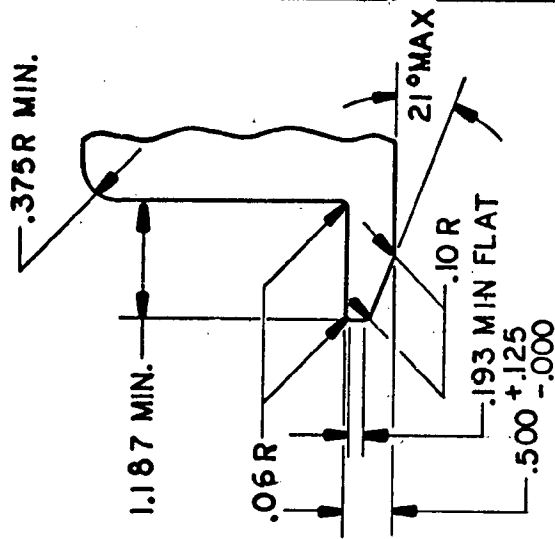


SECTION A-A TYPE C PALLETS
OPTIONAL TYPE A & B PALLETS

SIDE SLOT DETAIL
FIGURE 4
DIMENSIONS IN INCHES

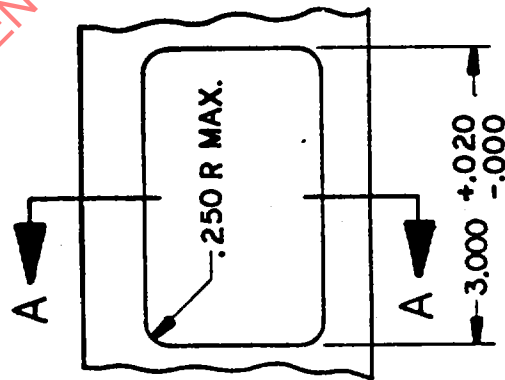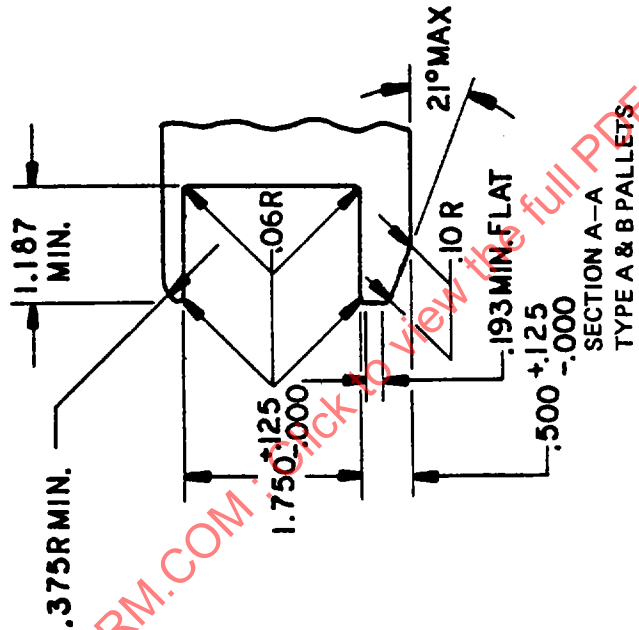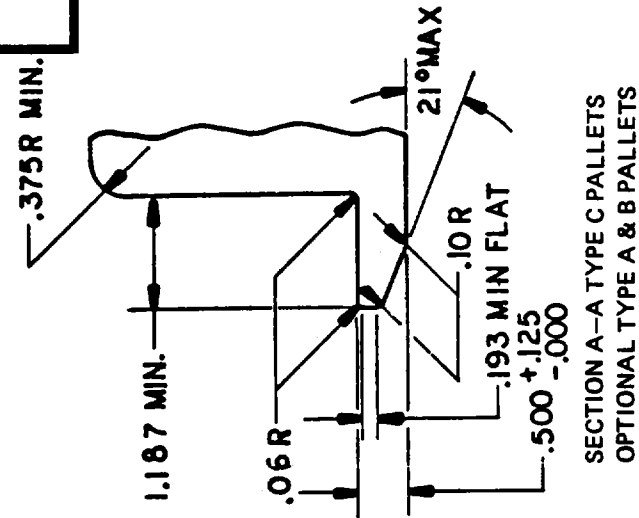

SIDE SLOT DETAIL
FIGURE 4
DIMENSIONS IN INCHES

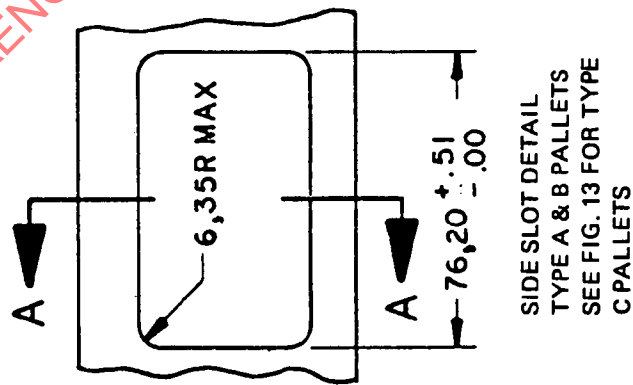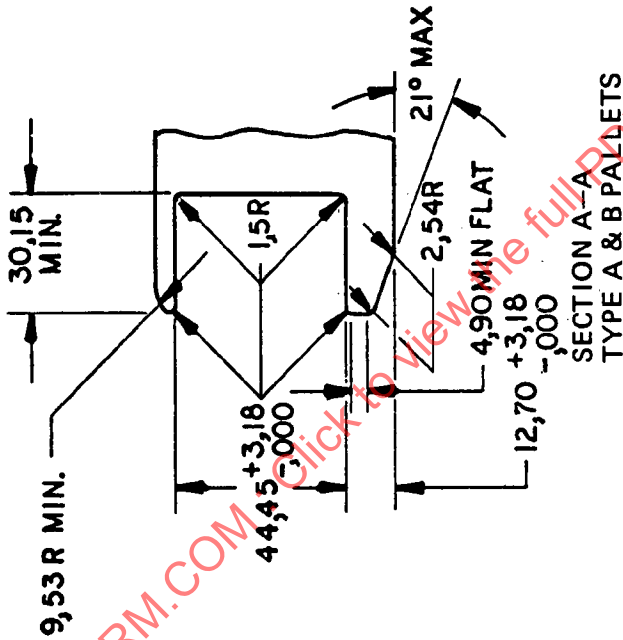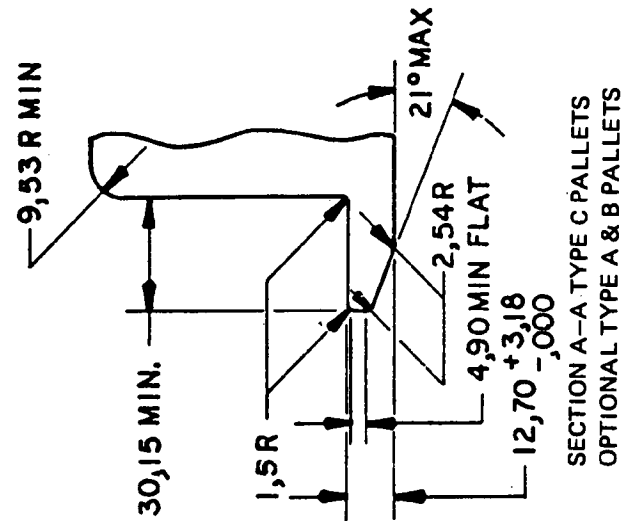

SIDE SLOT DETAIL
FIGURE 4 (SI)
DIMENSIONS IN MILLIMETERS

AS 1130D

CONTINUOUS TRACK
PER MS 33601A
OPTIONAL

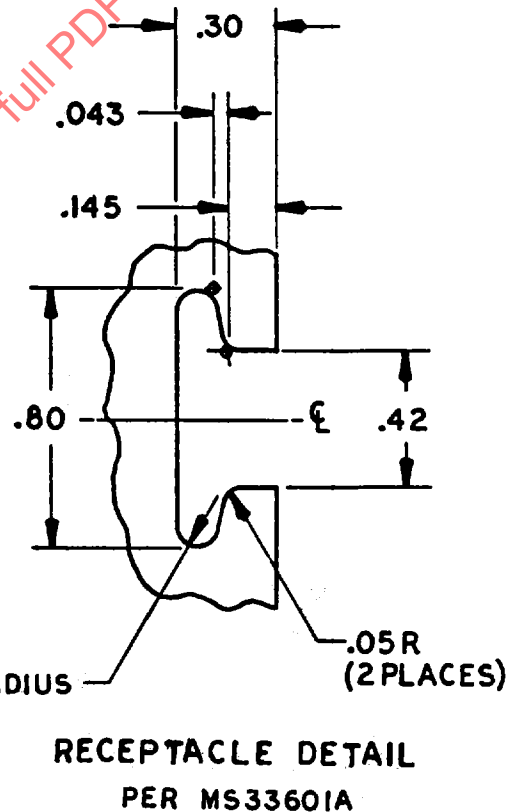
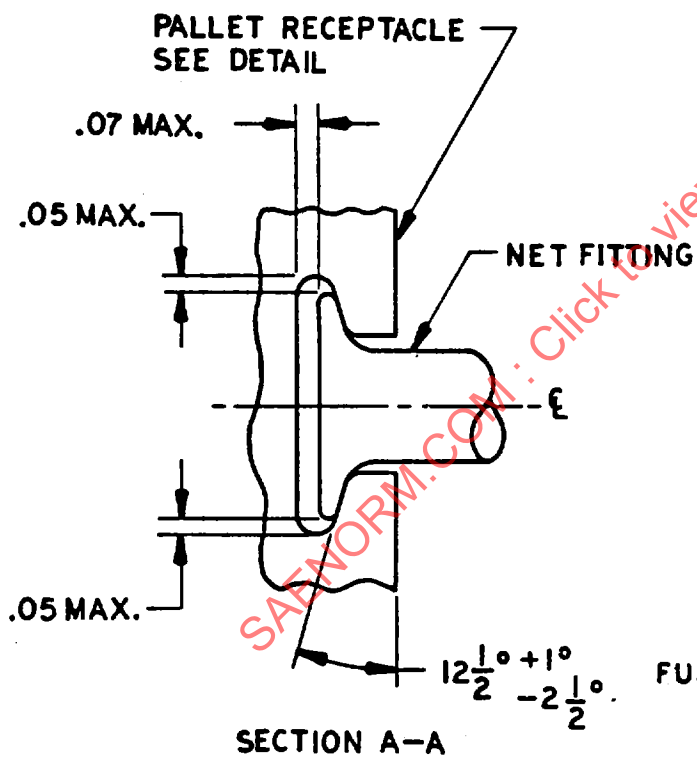
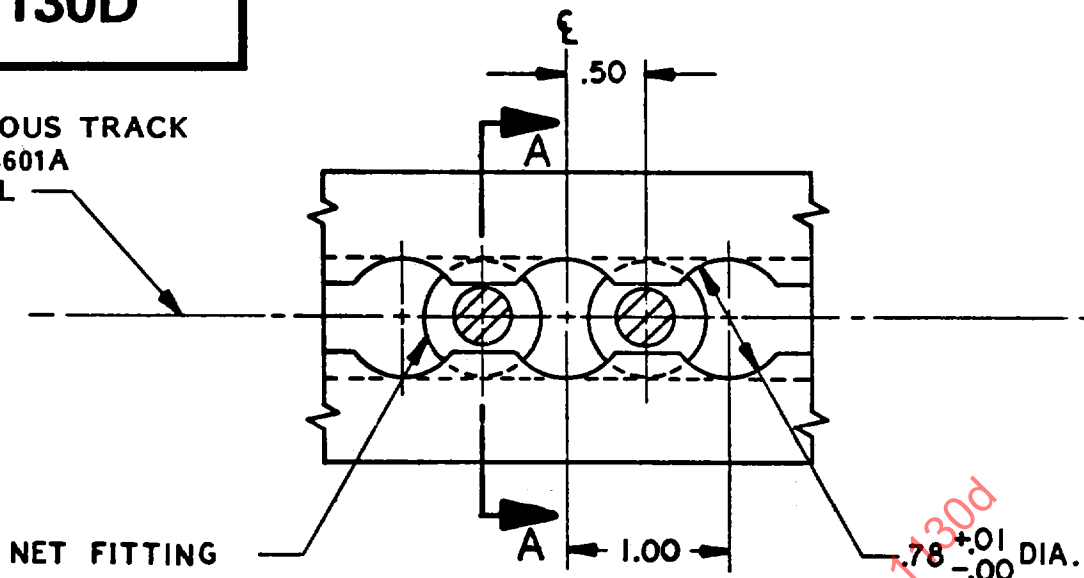


FIGURE 5

CARGO NET TIE-DOWN RECEPTACLE

DIMENSION IN INCHES


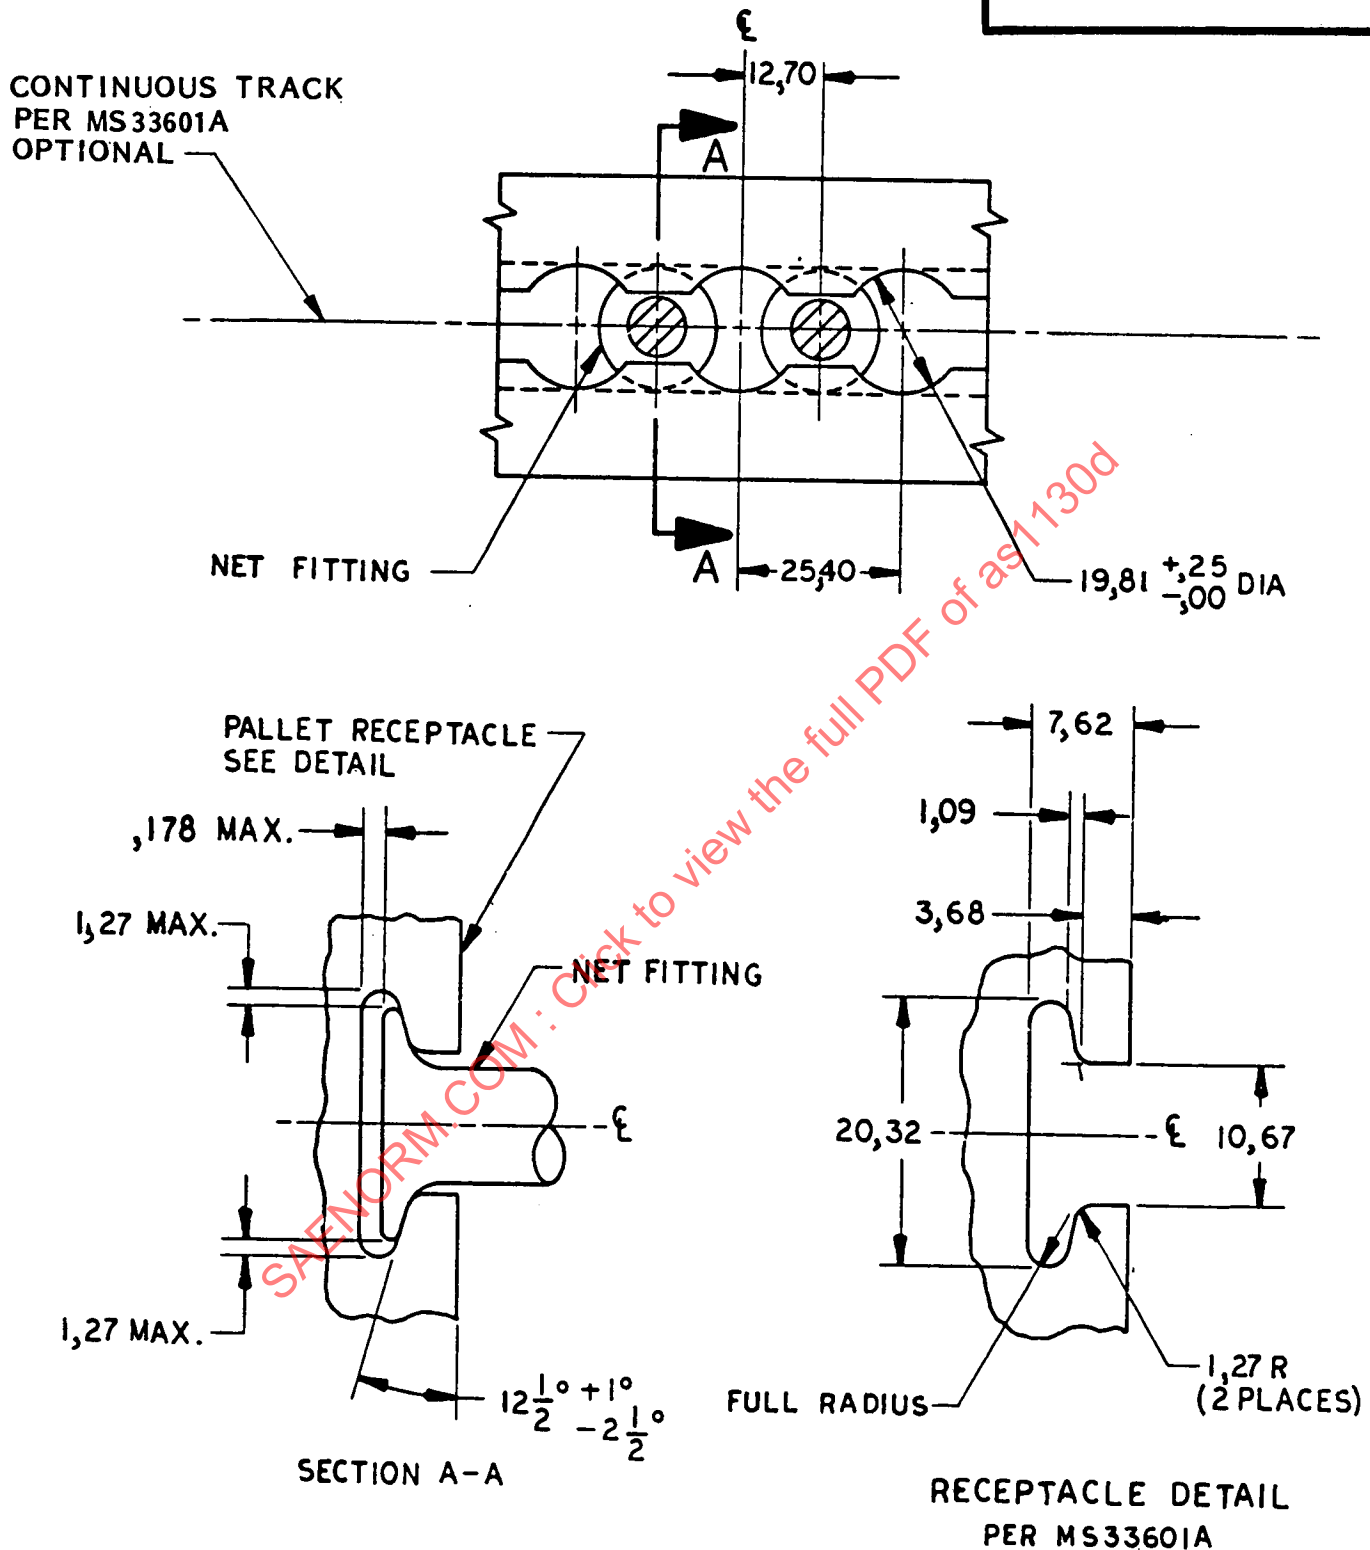


FIGURE 5 (SI)

CARGO NET TIE-DOWN RECEPTACLE

DIMENSION IN MILLIMETERS

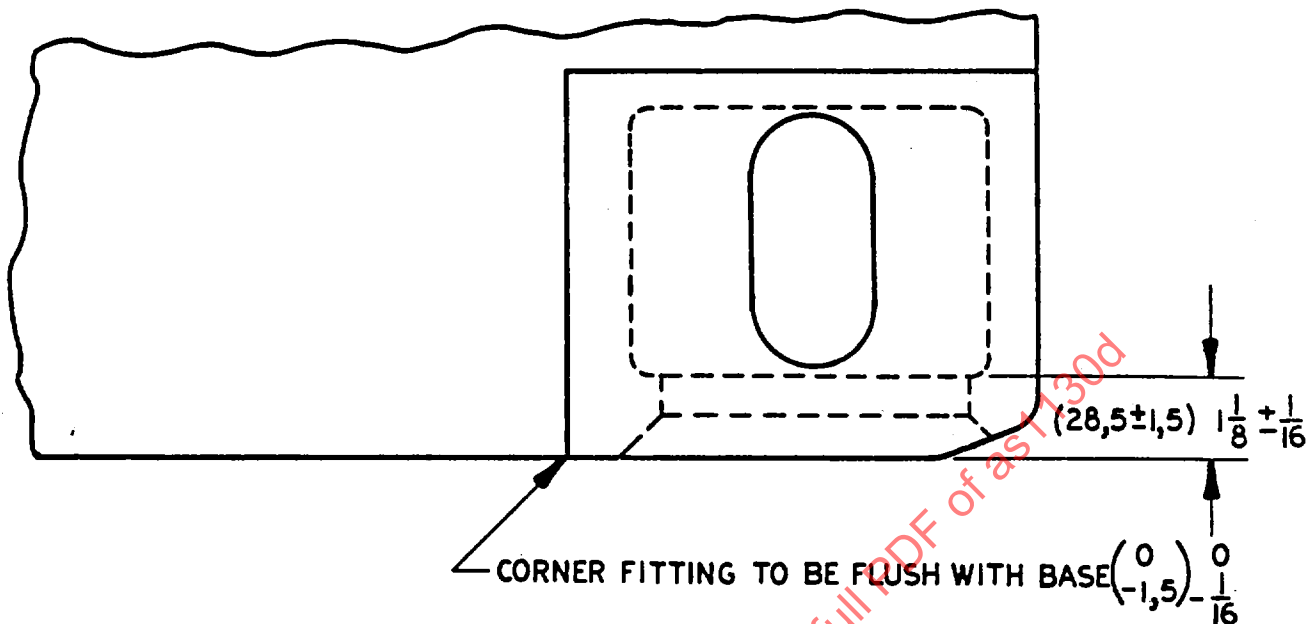


LOCATION OF BOTTOM CORNER FITTING
TYPE B PALLET

DIMENSIONS IN INCHES
(DIMENSIONS IN MILLIMETERS SHOWN IN PARENTHESES)

FIGURE 6

1. Solid and dotted lines (— · —) show surfaces and contours which must be physically duplicated in the fitting
2. Phantom lines (---) show optional walls which may be used to develop a boxed shaped fitting
3. Outside and inside corner radii where sharp corners are shown must be 1/8 in. max except (as noted
4. Four fittings required per pallet
2 L.H. and 2 R.H.
5. Outside Surfaces shall have a casting surface of C30 or better




26

26

- 26



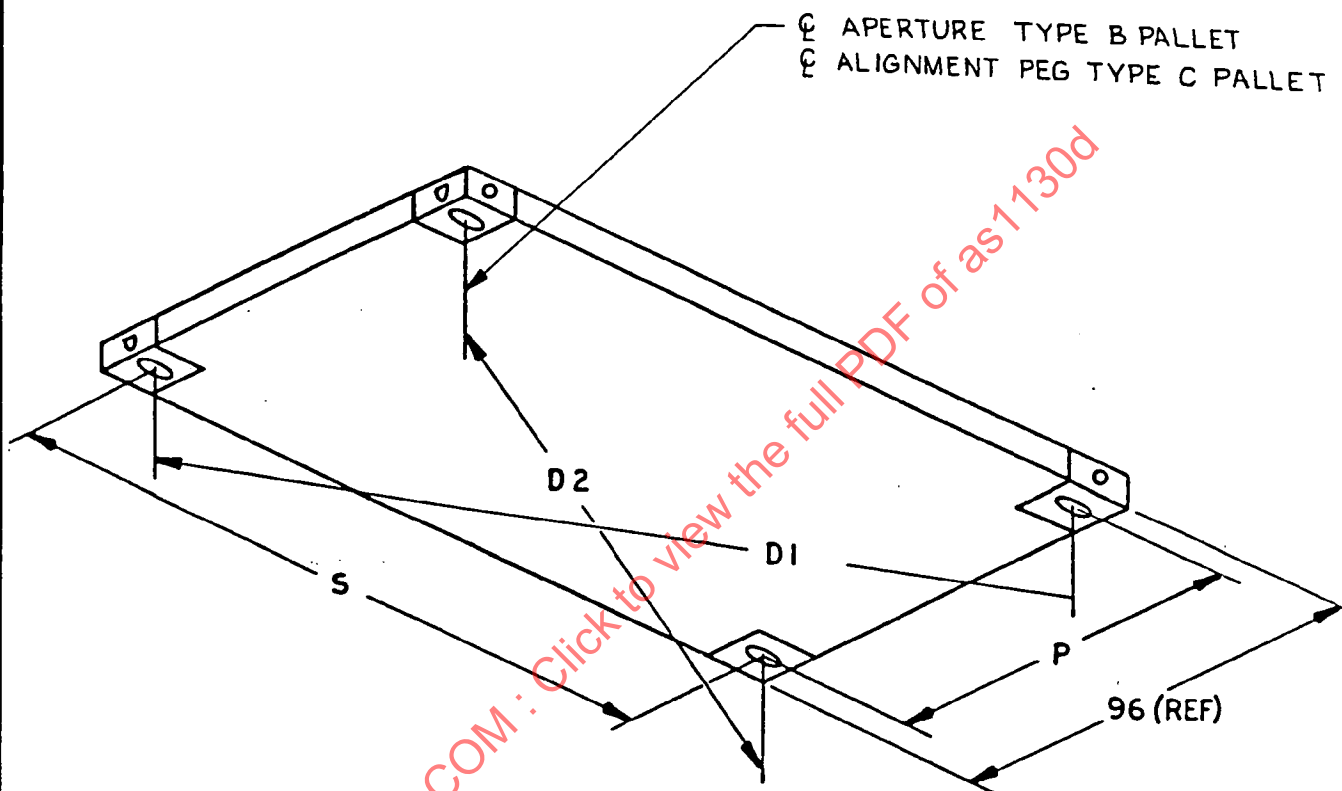

TYPE B & C PALLET

FIGURE 8