


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV. C	RATIONALE THIS NONCURRENT STANDARD HAS BEEN STABILIZED.		FEDERAL SUPPLY CLASS 5305
SAE AS115451 THRU AS115500	STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.		
SAENORM.COM : Click to view the full PDF of as115451c			
SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/AS115451C		THIRD ANGLE PROJECTION 	
CUSTODIAN: E-25		PROCUREMENT SPECIFICATION: AS7452	
 An SAE International Group	AEROSPACE STANDARD SCREW – FLAT FILLISTER HEAD, CADMIUM PLATED, STEEL UNS G87400, 125 KSI MIN. .2500-28UNF-3A		 AS115451 THRU AS115500 REV. C

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD AN115451 THRU AN115500, REVISION 3. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCT LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

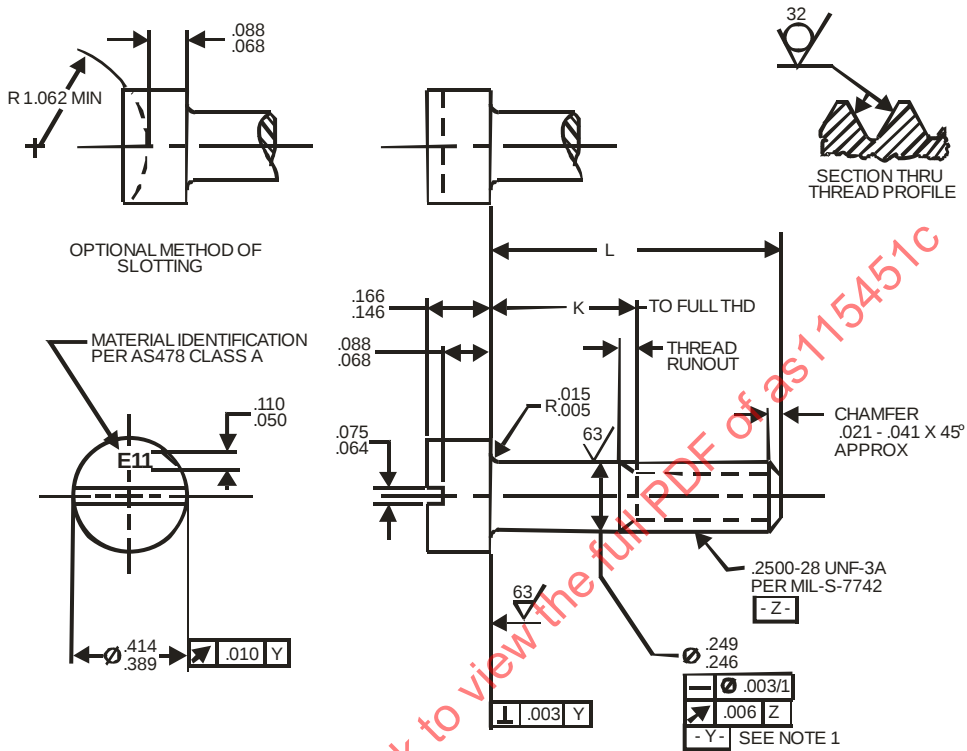


FIGURE 1 – SCREW

TABLE 1 – PART NUMBERS AND DIMENSIONS

PART NUMBERS	L	K	PART NUMBERS	L	K
AN115455	.490 - .510	(a)	AN115471	1.490 - 1.510	.815 - .875
AN115456	.552 - .572	(a)	AN115472	1.552 - 1.572	.878 - .938
AN115457	.615 - .635	(a)	AN115473	1.615 - 1.635	.940 - 1.000
AN115458	.678 - .698	(a)	AN115474	1.678 - 1.698	1.002 - 1.062
AN115459	.740 - .760	.065 - .125	AN115475	1.740 - 1.760	1.065 - 1.125
AN115460	.802 - .822	.128 - .188	AN115476	1.865 - 1.885	1.190 - 1.250
AN115461	.865 - .885	.190 - .250	AN115477	1.990 - 2.010	1.315 - 1.375
AN115462	.928 - .948	.252 - .312	AN115478	2.115 - 2.135	1.440 - 1.500
AN115463	.990 - 1.010	.315 - .375	AN115479	2.240 - 2.260	1.565 - 1.625
AN115464	1.052 - 1.072	.378 - .438	AN115480	2.365 - 2.385	1.690 - 1.750
AN115465	1.115 - 1.135	.440 - .500	AN115481	2.490 - 2.510	1.815 - 1.875
AN115466	1.178 - 1.198	.502 - .562	AN115482	2.615 - 2.635	1.940 - 2.000
AN115467	1.240 - 1.260	.565 - .625	AN115483	2.740 - 2.760	2.065 - 2.125
AN115468	1.302 - 1.322	.628 - .688	AN115484	2.865 - 2.885	2.190 - 2.250
AN115469	1.365 - 1.385	.690 - .750	AN115485	2.990 - 3.010	2.315 - 2.375
AN115470	1.428 - 1.448	.752 - .812			

(a) THREAD TO HEAD. MAXIMUM TWO INCOMPLETE THREADS.