



SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A	FEDERAL SUPPLY CLASS		RATIONALE		
			THIS TECHNICAL REPORT IS BEING STABILIZED BECAUSE IT COVERS TECHNOLOGY, PRODUCTS, OR PROCESSES WHICH ARE MATURE AND NOT LIKELY TO CHANGE IN THE FORESEEABLE FUTURE.		
AS1292™	STABILIZED NOTICE		THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE G-3, AEROSPACE COUPLINGS, FITTINGS, HOSE, TUBING ASSEMBLIES COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.		
SAENORM.COM : Click to view the full PDF of as1292a			For more information on this standard, visit https://www.sae.org/standards/content/AS1292A/ THIRD ANGLE PROJECTION 		
			CUSTODIAN: G-3 PROCUREMENT SPECIFICATION:		
		AEROSPACE STANDARD SLEEVE, HOSE ASSEMBLY, CHAFE GUARD, BUTYRATE COIL		AS1292™	REV. A

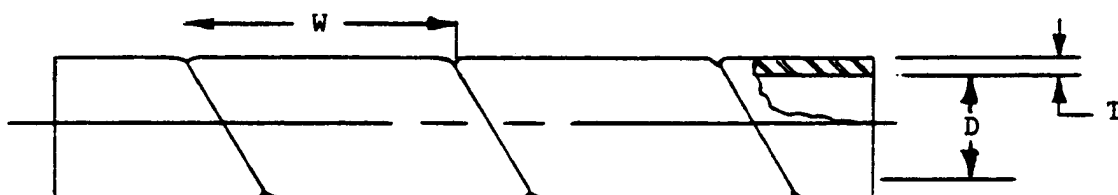

Size	D* Inside Diameter						T Wall Thickness + .010	W + .12	Size Selection Based On Hose O.D. To Be Covered					
	Nominal		Maximum		Minimum				Maximum		Minimum			
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm		
-1	.250	6.35	.275	6.99	.225	5.72	.05	1.27	.250	6.35	.750	19.05	.243	6.17
-2	.750	19.05	.775	19.69	.725	18.42	.07	1.78	.380	9.65	1.875	47.63	.751	19.08
-3	1.875	47.63	2.00	50.80	1.850	46.99	.15	3.81	.670	15.75	4.000	101.60	1.876	47.65

* The min./max. I.D. dimensions shown refer to the extruded tube before cutting the helix. The nominal I.D. dimensions shown are reference only.

- 1.1 **Usage:** Used as an outer protective cover on hose and/or hose assemblies to prevent harmful abrasion and to prolong service life. Additionally, this sleeve is intended to facilitate repair to damaged chafe sleeve without having to disconnect the hose assembly from the installation.
- 1.2 **Material:** Lightweight, cellulose acetate butyrate coil. Principally, this coil will be black; however, other colors may also be utilized, depending on the supplier and the requirements of the application.
- 1.3 **Resistance:** This sleeve shall have good resistance to abrasion, moisture, weather conditions, hydraulic fluids, fuels, and most other fluids used in aircraft applications.
- 1.4 **Physical Properties:** Good tensile strength and an ability to retain useful flexibility, mechanical strength, and elongation within a reasonable temperature range as specified in para. 1.5.
- 1.5 **Temperatures:** Suitable for most applications within the range of 0° F thru +200° F (-17.8° C thru +93° C).
- 1.6 **Identification:** Sleeve shall be identified by full (AS) part number (see para. 1.9.4) on a nonmetallic tag attached to the sleeve. The tag shall also bear the manufacturer's name or trademark.
- 1.7 **Selection of Size:** Use the "Size Selection" column on the chart to determine the desired sleeve size for a particular hose whose measured O.D. falls within the O.D. ranges listed.
- 1.8 **Installation:** The sleeve may be spirally wrapped onto the hose or hose assembly prior to or following the attachment of the second end fitting. Proper selection of the sleeve size will insure a snug fit and will prevent the sleeve from slipping on the hose assembly.