
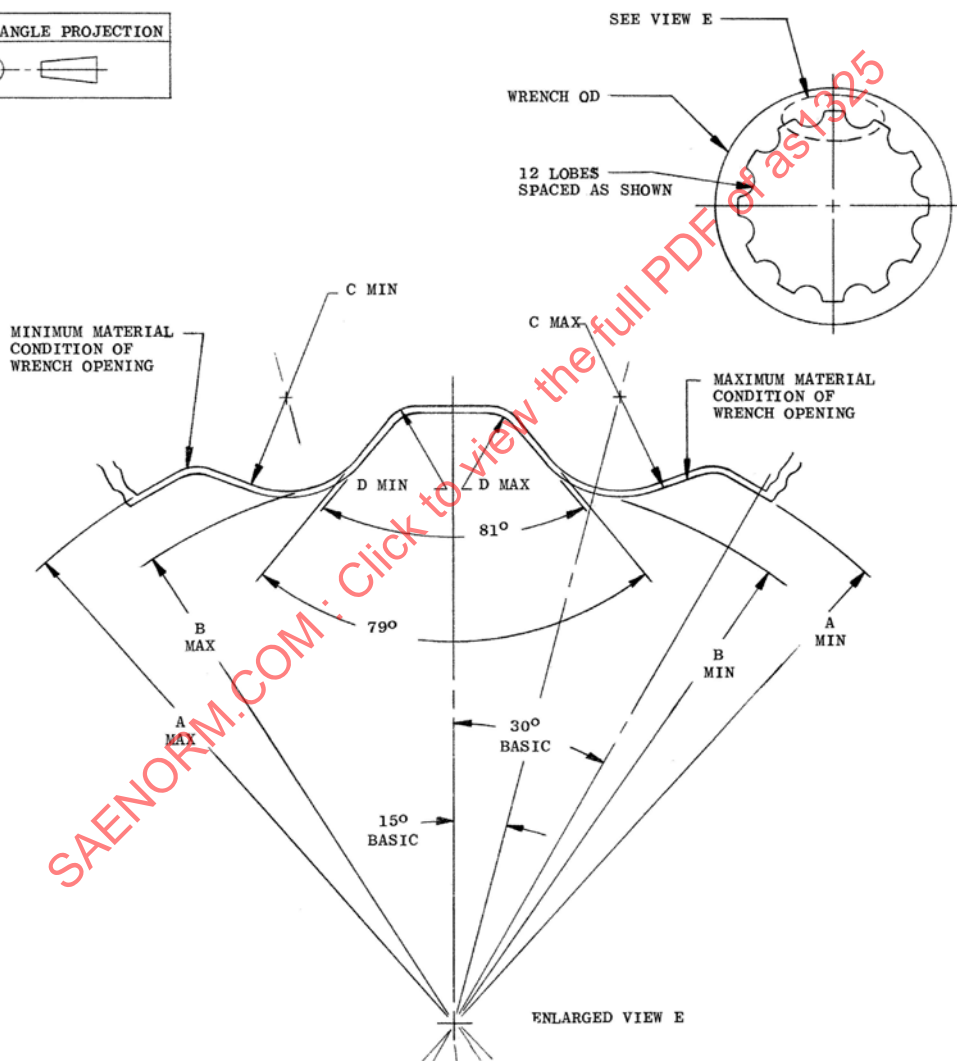


Wrench Configuration, 12 Lobed Drive

RATIONALE

AS1325 has been reaffirmed to comply with the SAE five-year review policy.



VARIATIONS IN SIZE, FORM, AND POSITION OF THE 12 LOBES ARE PERMITTED, PROVIDING THE ACTUAL PROFILE FALLS WITHIN THE MAXIMUM AND MINIMUM MATERIAL CONDITIONS SHOWN.

TOOLS CONFORMING TO THIS STANDARD WILL WRENCH FASTENERS HAVING WRENCHING CONFIGURATIONS PER: AS 1159 LOBED, AS 870 DOUBLE HEXAGON, OR ASCC AIR STANDARD 17/2C HEXAGON.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2012 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
SAE WEB ADDRESS: <http://www.sae.org>

**SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS1325>**

TABLE I INCHES
(U.S. CUSTOMARY UNITS)

DASH NO.	NOMINAL WRENCHING SIZE SEE NOTE	MINIMUM MATERIAL CONDITION				MAXIMUM MATERIAL CONDITION			
		A DIA MAX	B DIA MAX	C RAD MIN	D RAD MIN	A DIA MIN	B DIA MIN	C RAD MAX	D RAD MAX
06	.1875	.229	.202	.015	.005	.225	.199	.019	.010
07	.2188	.265	.234	.018	.005	.261	.231	.022	.010
08	.2500	.301	.266	.020	.005	.297	.263	.024	.010
10	.3125	.375	.333	.025	.010	.370	.329	.029	.015
12	.3750	.446	.397	.030	.010	.441	.393	.034	.015
14	.4375	.519	.462	.035	.015	.514	.458	.039	.020
16	.5000	.592	.528	.040	.015	.587	.524	.044	.020
18	.5625	.664	.593	.045	.015	.658	.588	.049	.025
20	.6250	.741	.659	.050	.015	.735	.654	.054	.025
22	.6875	.814	.724	.055	.020	.808	.719	.059	.030
24	.7500	.887	.790	.060	.020	.881	.785	.064	.030
26	.8125	.960	.857	.065	.025	.953	.851	.069	.035
28	.8750	1.032	.921	.070	.025	1.025	.915	.074	.035
30	.9375	1.106	.987	.075	.030	1.099	.981	.079	.040
32	1.0000	1.177	1.052	.080	.030	1.170	1.046	.084	.040
34	1.0625	1.248	1.116	.085	.035	1.241	1.110	.089	.045
36	1.1250	1.329	1.184	.090	.035	1.321	1.177	.094	.045
38	1.1875	1.401	1.249	.095	.040	1.393	1.242	.099	.050
40	1.2500	1.473	1.314	.100	.040	1.465	1.307	.104	.050
42	1.3125	1.546	1.379	.105	.045	1.538	1.372	.109	.055
44	1.3750	1.619	1.446	.110	.045	1.611	1.439	.114	.055
46	1.4375	1.692	1.512	.115	.050	1.683	1.504	.119	.060
48	1.5000	1.764	1.576	.120	.050	1.755	1.568	.124	.060
50	1.5625	1.836	1.641	.125	.055	1.827	1.633	.129	.065
52	1.6250	1.910	1.708	.130	.055	1.901	1.700	.134	.065
54	1.6875	1.981	1.772	.135	.060	1.972	1.764	.139	.070
56	1.7500	2.055	1.838	.140	.060	2.046	1.830	.144	.070

NOMINAL WRENCHING SIZE VALUES INDICATE NOMINAL WIDTH ACROSS FLATS OF CORRESPONDING HEXAGON OR DOUBLE HEXAGON (12 POINT) WRENCHING CONFIGURATIONS.