

SAE-AS14154

ADOPTION NOTICE

SAE-AS14154, "Circuit Breaker - Aircraft, Trip-Free, Push-Pull, 3 Phase, 1 thru 20 Amp, Type 1," was adopted on August 27, 1997, for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, Naval Air Warfare Center Aircraft Division, Code 414100B120-3, Highway 547, Lakehurst, NJ 08733-5100. DoD activities may obtain copies of this standard from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. The private sector and other government agencies may purchase copies from SAE, 400 Commonwealth Drive, Warrendale, PA 15096.

SAE-AS14154 should be used instead of MS14154, which was canceled on August 27, 1997.

Custodians:

Army - CR
Navy - AS
Air Force - 85

Adopting Activity

Navy - AS
(Project 5925-0269)

FSC 5925

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
5925**AS14154****NOTICE**

This document has been taken directly from U.S. Military Standard, MS14154D, and contains only minor editorial and format changes required to bring it into conformance with the publishing requirements of SAE technical standards.

The original Military Standard was adopted as an SAE standard under the provisions of the SAE Technical Standards Board (TSB) Rules and Regulations (TSB 001) pertaining to accelerated adoption of government specifications and standards. TSB rules provide for (a) the publication of portions of unrevised government specifications and standards without consensus voting at the SAE Committee level, (b) the use of the existing government specification or standard format, and (c) the exclusion of any qualified product list (QPL) sections.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAENORM.COM : Click to view the full PDF of as14154

ISSUED 1997-08

PREPARED BY SUBCOMMITTEE AE-8B1

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

CIRCUIT BREAKER - AIRCRAFT, TRIP-FREE,
PUSH-PULL, 3 PHASE, 1 THRU 20 AMP, TYPE 1

AS14154
SHEET 1 OF 4

Copyright 1997 Society of Automotive Engineers, Inc.
All rights reserved.

Printed in the U.S.A.

QUESTIONS REGARDING THIS DOCUMENT:
TO PLACE A DOCUMENT ORDER:

(412) 772-8510
(412) 776-4970

FAX: (412) 776-0243

FA: Distributed under license from the IHS Archive

AS14154

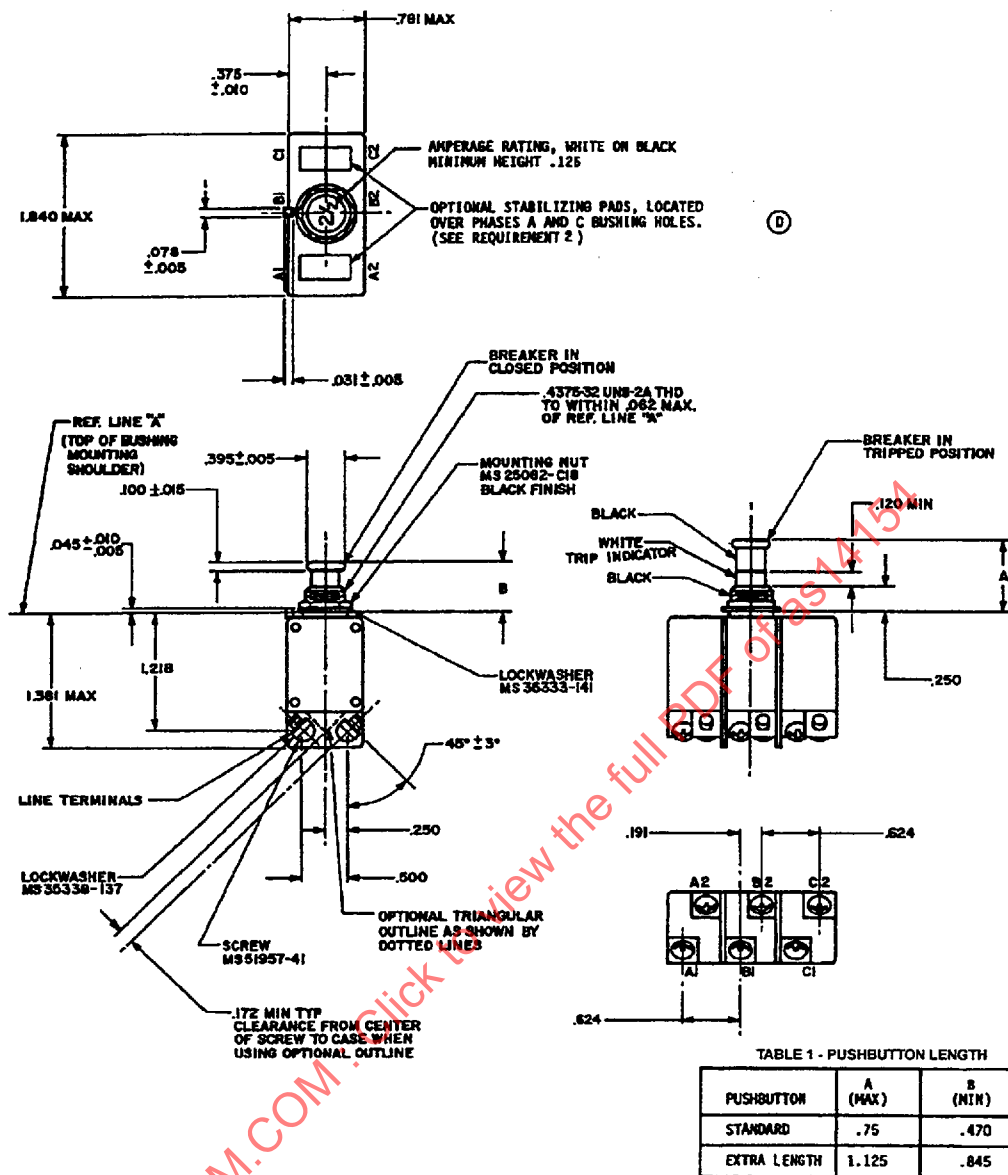


FIGURE 1 - TRIP-FREE CIRCUIT BREAKER

AS14154

TABLE II ELECTRICAL AND MECHANICAL CHARACTERISTICS

DASH NUMBER	NOMINAL AMPERAGE RATING (A)	VOLT DROP MAX. (V)	WEIGHT MAX. (LBS)	OPERATING FORCE MAX. (LBS)		ENDURANCE CYCLES				MECH. NO. LOAD
				PULLOUT	RESET	RESISTIVE		INDUCTIVE		
1	1	1.10	.15	12	12	5000 1/	none	2500 1/	none	5000
2	2	.75								
2-1/2	2-1/2	.70								
3	3	.65								
4	4	.45								
5	5	.35								
7-1/2	7-1/2	.30								
10	10	.28								
15	15	.28								
20	20	.25								

1/400 HZ 115/200 VOLT SYSTEM, TESTED AT 120 ±5 VOLTS 380-400 HZ

TABLE III DETAIL CALIBRATION REQUIREMENTS

NOMINAL AMPERAGE RATING (A)	+25°C					-55°C					+71°C				
	% RATED CURRENT					% RATED CURRENT					% RATED CURRENT				
	110	145	200	500	1000	110	165	200	500	1000	100	145	200	500	1000
-1	MUST HOLD - 1 HOUR MIN.	MUST TRIP - 1 HOUR MAX.	↑	↑	↑	MUST HOLD - 1 HOUR MIN.	MUST TRIP - 1 HOUR MAX.	↑	↑	↑	MUST HOLD - 1 HOUR MIN.	MUST TRIP - 1 HOUR MAX.	↑	↑	↑
-2			↑	↑	↑			↑	↑	↑			↑	↑	↑
-2 1/2			↑	↑	↑			↑	↑	↑			↑	↑	↑
-3			4	0.4	0.10			4	0.55	0.15			3	0.33	0.08
-4			TO	TO	TO			TO	TO	TO			TO	TO	TO
-5			20	2.0	0.53			40	3.5	0.80			20	1.7	.040
-7 1/2	2/	2/	↓	↓	↓	3/	3/	↓	↓	↓	3/	3/	↓	↓	↓
-10			↓	↓	↓			↓	↓	↓			↓	↓	↓
-15			↓	↓	↓			↓	↓	↓			↓	↓	↓
-20			4/	4/	4/			4/	4/	4/			4/	4/	4/

2/ ONE PHASE AT SPECIFIED LOAD AND OTHER PHASES CARRYING RATED LOAD.

3/ BALANCED THREE PHASE LOAD

4/ SINGLE PHASE LOAD ONLY. TRIP TIME IN SECONDS.