

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

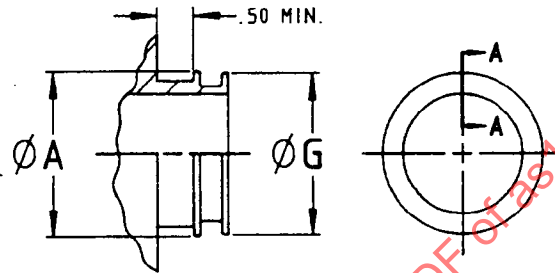
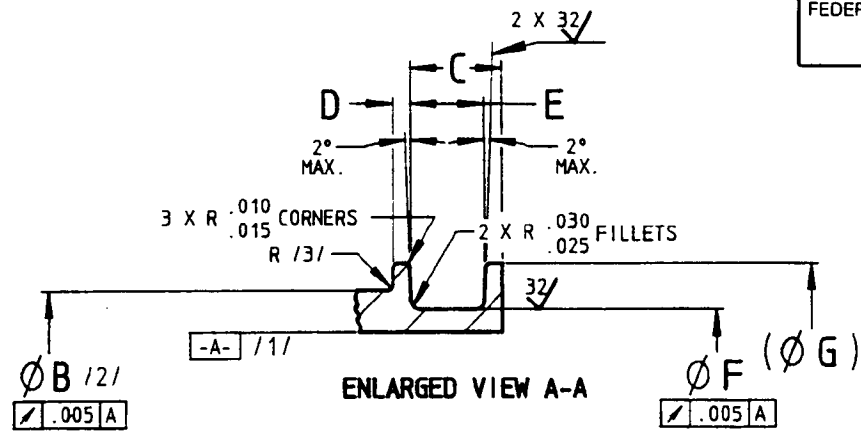


FIGURE 1 - FERRULE END



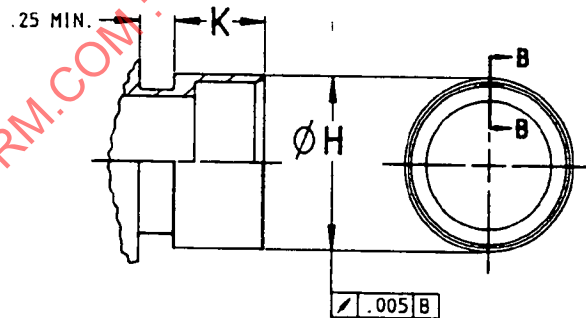


FIGURE 2 - SLEEVE END

THIRD ANGLE PROJECTION

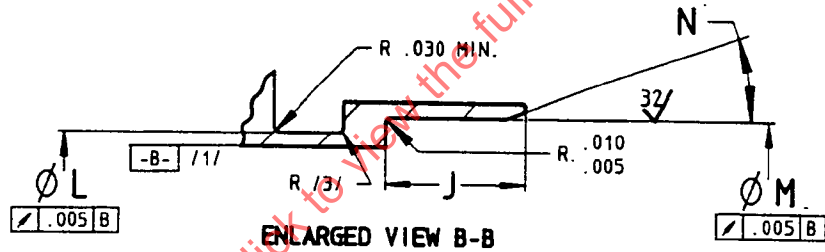

CUSTODIAN: SAE G-3/G-3A

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD
FITTING END, THREADLESS COUPLING -
FERRULE OR SLEEVE,
DESIGN STANDARD

AS1656

SHEET 1 OF 3

TABLE 1 - FERRULE END DIMENSIONS

AS1656 DASH NUMBER	TUBE SIZE (REF)	A MAX /4/	B MAX /4/	C MAX	D MAX MACHINED END	D MAX CASTING	E MIN	F MAX /4/	G MAX /4/
-1-08	.500	.689	.625	.135	.040	.065	.085	.583	.684
-1-10	.625	.814	.750	.135	.040	.065	.085	.708	.809
-1-12	.750	.994	.890	.170	.045	.070	.120	.840	.989
-1-16	1.000	1.270	1.142	.210	.045	.070	.160	1.062	1.265
-1-20	1.250	1.520	1.392	.210	.045	.070	.160	1.312	1.515
-1-24	1.500	1.790	1.642	.210	.045	.070	.160	1.582	1.785
-1-28	1.750	2.040	1.892	.210	.045	.070	.160	1.832	2.035
-1-32	2.000	2.313	2.145	.210	.060	.085	.160	2.095	2.308
-1-36	2.250	2.563	2.395	.210	.060	.085	.160	2.347	2.558
-1-40	2.500	2.813	2.645	.210	.060	.085	.160	2.595	2.808
-1-48	3.000	3.313	3.145	.210	.060	.085	.160	3.095	3.308
-1-56	3.500	3.823	3.645	.210	.060	.085	.160	3.609	3.820
-1-64	4.000	4.332	4.154	.210	.075	.085	.160	4.116	4.329

TABLE 2 - SLEEVE END DIMENSIONS

AS1656 DASH NUMBER	TUBE SIZE (REF)	H MAX /4/	J MIN /4/	K MAX /4/	L MAX /4/	M MIN /4/	N DEG MAX
-2-08	.500	.766	.461	.603	.625	.690	31
-2-10	.625	.891	.461	.603	.750	.815	31
-2-12	.750	1.071	.541	.683	.890	.995	31
-2-16	1.000	1.347	.621	.763	1.142	1.271	16
-2-20	1.250	1.597	.621	.763	1.392	1.521	16
-2-24	1.500	1.867	.621	.763	1.642	1.791	16
-2-28	1.750	2.118	.621	.763	1.892	2.042	16
-2-32	2.000	2.391	.621	.793	2.145	2.315	16
-2-36	2.250	2.641	.651	.793	2.395	2.565	16
-2-40	2.500	2.891	.651	.793	2.645	2.815	16
-2-48	3.000	3.391	.651	.793	3.145	3.315	16
-2-56	3.500	3.905	.651	.793	3.645	3.829	16
-2-64	4.000	4.411	.651	.793	4.154	4.335	16