

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
D

SAE AS1717

FEDERAL SUPPLY CLASS
4730

RATIONALE

AS1717D HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

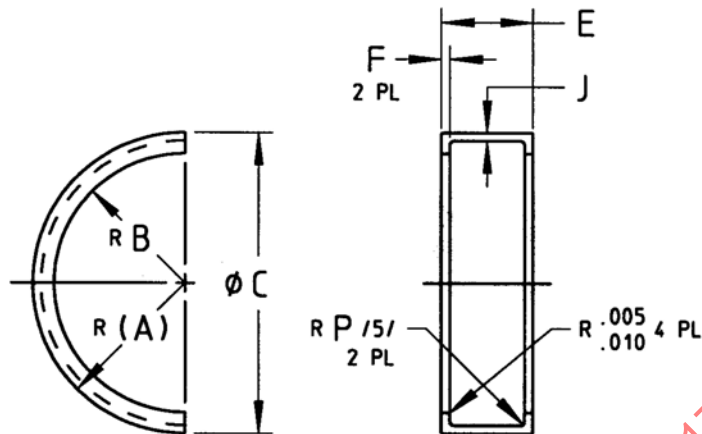


FIGURE 1 - CONFIGURATION FOR SIZES 08 AND 10 (HALF RETAINER SHOWN)


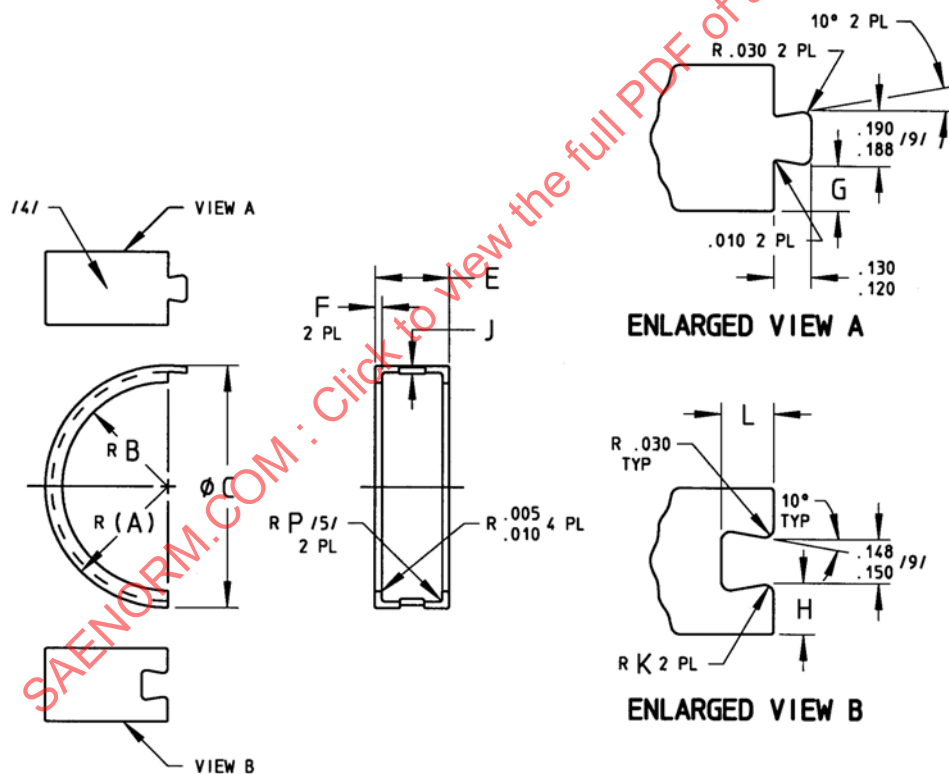


FIGURE 2 - CONFIGURATION FOR SIZES 12 THROUGH 72 (HALF RETAINER)

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS1717D>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3A

PROCUREMENT SPECIFICATION: /3/ AS1710

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

RETAINER, COUPLING, FLEXIBLE,
VARIABLE CAVITY, THREADED
FERRULE TYPE TUBE ENDS

SAE AS1717
SHEET 1 OF 4

REV.
D


Copyright 2013 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1982-05 REVISED 2006-08 REAFFIRMED 2013-01

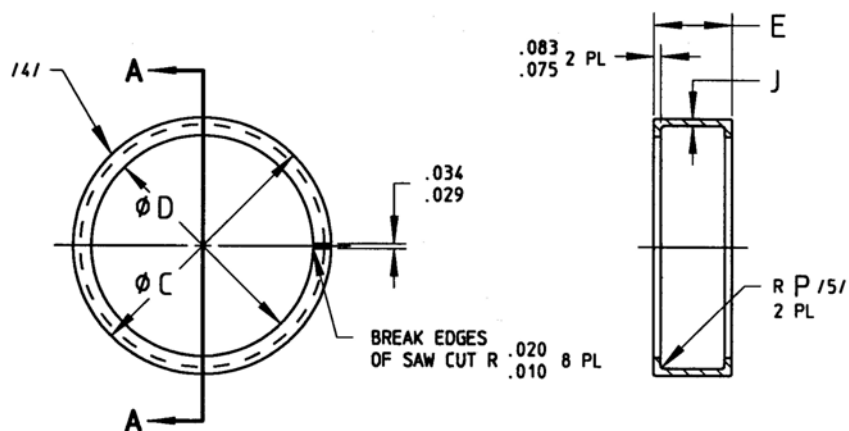

SECTION A-A

FIGURE 3 - CONFIGURATION FOR SIZES 80 AND 88 (FULL RETAINER)

TABLE A1 - COUPLING RETAINER DIMENSIONS

BASIC NO. AS1717 SIZE CODE	(TUBE SIZE)	(A)	B +.003/-.001	C ±.004	D +.006/-.000	E +.000/-.005	F +.003/-.005	G +.002/-.000	H +.000/-.002
-08	.500	.398	.323	.797	-	.415	.040	-	-
-10	.625	.461	.385	.922	-	.415	.040	-	-
-12	.750	.566	.456	1.132	-	.435	.045	.121	.143
-16	1.000	.696	.581	1.392	-	.495	.045	.151	.173
-20	1.250	.821	.706	1.641	-	.495	.045	.151	.173
-24	1.500	1.005	.831	2.010	-	.535	.045	.171	.193
-28	1.750	1.130	.956	2.260	-	.535	.045	.171	.193
-32	2.000	1.260	1.083	2.520	-	.535	.061	.171	.193
-36	2.250	1.385	1.208	2.770	-	.535	.061	.171	.193
-40	2.500	1.510	1.333	3.020	-	.535	.061	.171	.193
-44	2.750	1.635	1.458	3.270	-	.535	.061	.171	.193
-48	3.000	1.752	1.583	3.503	-	.535	.061	.171	.193
-56	3.500	2.002	1.833	4.003	-	.607	.061	.207	.229
-64	4.000	2.256	2.087	4.512	-	.633	.061	.220	.242
-72	4.500	2.565	2.338	5.129	-	.627	.061	.217	.239
-80	5.000	-	-	5.636	5.188	.837	-	-	-
-88	5.500	-	-	6.136	5.688	.847	-	-	-

TABLE 1B - COUPLING RETAINER DIMENSIONS AND WEIGHTS

BASIC NO. AS1717 SIZE CODE	J /10/ RAD	K RAD	K TOL	L	P MIN /5/ REF.	WEIGHT LB/EA APPROX. REF.
-08	.032	-	-	-	.020	.002
-10	.032	-	-	-	.020	.002
-12	.036	.031	±.015	.175	.035	.004
-16	.044	.031	±.015	.175	.025	.006
-20	.044	.031	±.015	.175	.025	.007
-24	.063	.056	±.015/-0.030	.222	.050	.013
-28	.063	.056	±.015/-0.030	.222	.050	.014
-32	.066	.056	±.015/-0.030	.222	.045	.018
-36	.066	.056	±.015/-0.030	.222	.040	.020
-40	.066	.056	±.015/-0.030	.222	.040	.021
-44	.066	.056	±.015/-0.030	.222	.040	.023
-48	.072	.056	±.015/-0.030	.222	.040	.026
-56	.072	.056	±.015/-0.030	.222	.025	.033
-64	.072	.056	±.015/-0.030	.222	.025	.038
-72	.074	.056	±.015/-0.030	.222	.075	.049
-80	.086	-	-	-	.060	.158
-88	.086	-	-	-	.060	.174

NOTES:

1. MATERIAL: ALUMINUM ALLOY 2024-T6, 2024-T851, 2024-T8510 OR 2024-T8511 PER AMS-QQ-A-225/6, AMS-QQ-A-200/3 OR ASTM B 211.
2. FINISH: ANODIZE PER MIL-A-8625, TYPE II, CLASS 1 OR CLASS 2, COLOR OPTIONAL.
- /3/ RETAINERS SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED DISTRIBUTOR LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST FOR PRI-QPL-AS1710 FOR THIS STANDARD. THE QPL IS AVAILABLE AT www.eauditnet.com.
- /4/ IDENTIFICATION PER AS478 METHOD 30 INCLUDING THE MANUFACTURER'S NAME, TRADEMARK, OR CAGE CODE, COMPLETE "AS" PART NUMBER, AND DATE OF MANUFACTURE IN QUARTERS (3Q95 = THIRD QUARTERS 1995). SIZES -12 AND SMALLER MAY BE INDIVIDUALLY PLACED IN A PLASTIC BAG WITH A TAG CONTAINING THIS INFORMATION.
- /5/ THE MANUFACTURER WILL SPECIFY AND CONTROL THE MAXIMUM RADIUS AND WILL BE RESPONSIBLE TO ASSURE COMPATIBILITY WITH THE ASSEMBLY AND COMPLIANCE WITH THE PERFORMANCE REQUIREMENTS OF AS1710.
6. SURFACE TEXTURE: SYMBOLS PER ASME Y 14.36M; REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, MACHINED SURFACE TO BE 125 μ in Ra Max.

 An SAE International Group	AEROSPACE STANDARD	SAE AS1717 SHEET 3 OF 4	REV. D
	RETAINER, COUPLING, FLEXIBLE, VARIABLE CAVITY, THREADED FERRULE TYPE TUBE ENDS		