

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

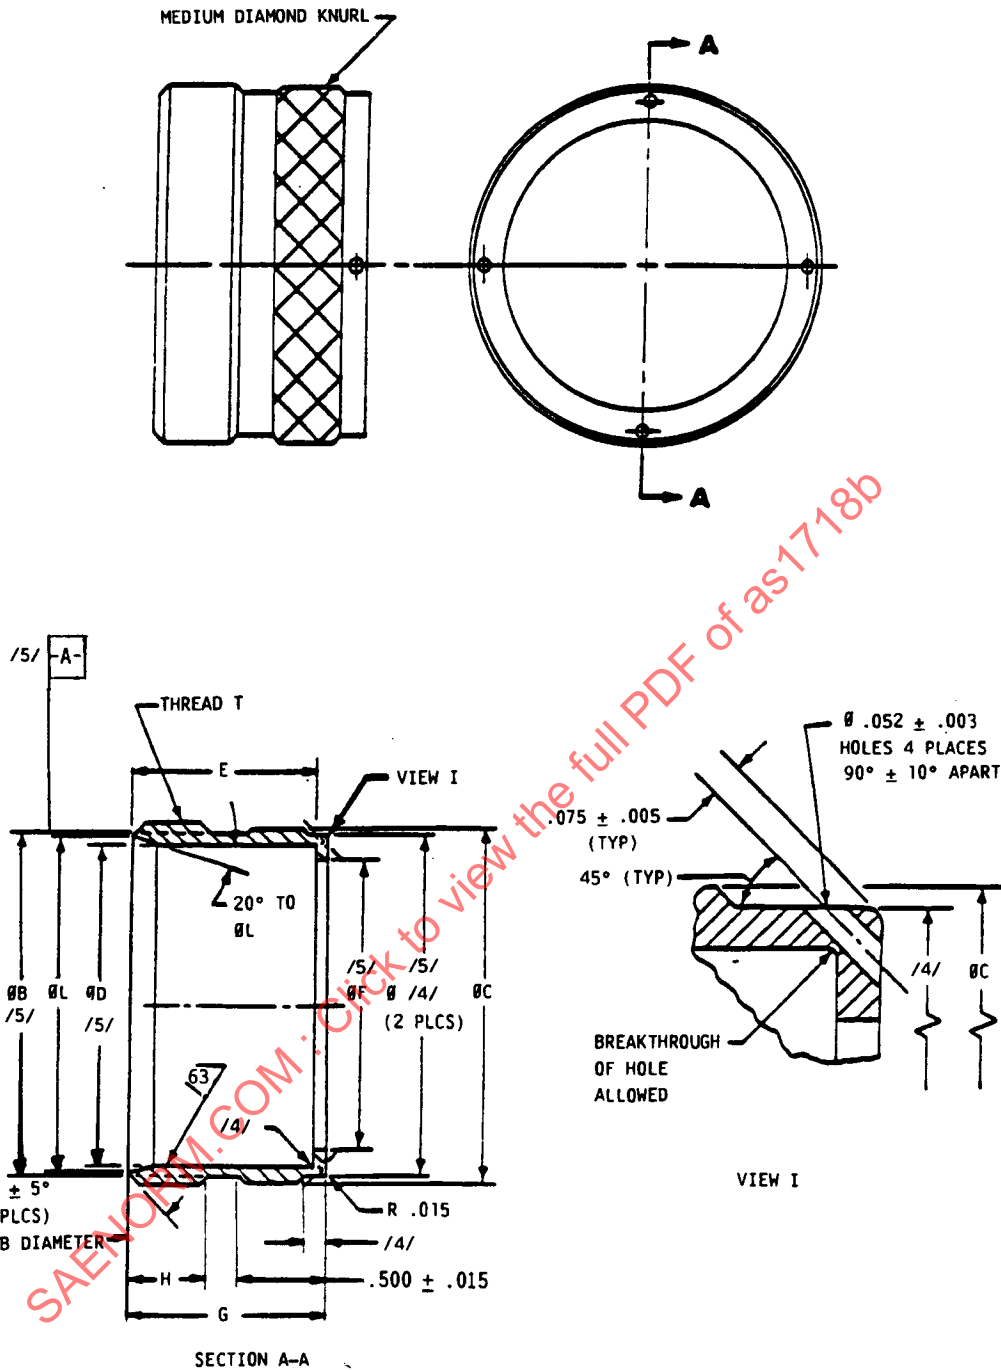


FIGURE 1

CUSTODIAN: SAE G-3/G-3A

PROCUREMENT SPECIFICATION: /2/ AS1710

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

COUPLING BODY, FLEXIBLE,
VARIABLE CAVITY, THREADED FERRULE
TYPE TUBE ENDS

AS1718

SHEET 1 OF 3

REV. B

TABLE 1 - COUPLING BODY DIMENSIONS AND WEIGHTS

AS1718 DASH NO	TUBE SIZE (REF)	THREAD T PER H28/2	B /1/	C KNURL MAX	D /2/ + .004/- .000	E + .010/- .000	F + .010/- .000	G + .000/- .010	H ± .015	L /3/	WT MAX LB
08	.500	1.000-12 UNF-2A	.884	.919	.800	.790	.693	.875	.312	.837	.014
10	.625	1.125-12 UNF-2A	1.009	1.044	.925	.790	.818	.875	.312	.962	.016
12	.750	1.375-12 UNF-2A	1.259	1.254	1.135	.932	.998	1.017	.312	1.187	.023
16	1.000	1.625-12 UN-2A	1.509	1.514	1.395	.992	1.274	1.078	.312	1.447	.027
20	1.250	1.875-12 UN-2A	1.759	1.764	1.645	.992	1.524	1.078	.312	1.697	.032
24	1.500	2.250-12 UN-2A	2.134	2.133	2.014	1.176	1.794	1.265	.375	2.066	.049
28	1.750	2.500-12 UN-2A	2.384	2.383	2.264	1.176	2.044	1.265	.375	2.316	.056
32	2.000	2.875-12 UN-2A	2.739	2.673	2.524	1.176	2.317	1.255	.500	2.586	.067
36	2.250	3.125-12 UN-2A	2.993	2.923	2.774	1.176	2.567	1.255	.500	2.836	.104
40	2.500	3.250-12 UN-2A	3.114	3.173	3.023	1.176	2.817	1.255	.500	3.086	.084
44	2.750	3.500-12 UN-2A	3.364	3.424	3.274	1.176	3.067	1.255	.500	3.336	.098
48	3.000	3.750-12 UN-2A	3.614	3.656	3.506	1.176	3.317	1.255	.500	3.569	.108
56	3.500	4.250-12 UN-2A	4.114	4.156	4.006	1.248	3.829	1.360	.500	4.069	.131
64	4.000	4.750-12 UN-2A	4.613	4.665	4.515	1.274	4.338	1.366	.500	4.578	.143
72	4.500	5.500-12 UN-2A	5.363	5.282	5.132	1.432	4.839	1.524	.500	5.215	.229
80	5.000	6.000-12 UN-2A	5.863	5.802	5.626	1.662	5.339	1.772	.500	5.710	.287
88	5.500	6.375-12 UNS-2A	6.238	6.302	6.126	1.645	5.839	1.755	.500	6.190	.300