

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. C
AS1719™

FEDERAL SUPPLY CLASS
4730

RATIONALE

THIS TECHNICAL REPORT IS BEING STABILIZED BECAUSE IT COVERS TECHNOLOGY, PRODUCTS, OR PROCESSES WHICH ARE MATURE AND NOT LIKELY TO CHANGE IN THE FORESEEABLE FUTURE.


STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE G-3, AEROSPACE COUPLINGS, FITTINGS, HOSE, TUBING ASSEMBLIES COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAENORM.COM : Click to view the full PDF of as1719c

For more information on this standard, visit
<https://www.sae.org/standards/content/AS1719C/>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3A

PROCUREMENT SPECIFICATION: /2/ AS1710



AEROSPACE STANDARD

FITTING END, HALF-COUPLING, FLEXIBLE
VARIABLE CAVITY THREADED,
FERRULE TYPE DESIGN STANDARD

AS1719™

REV.
C

Copyright © 2024 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, or used for text and data mining, AI training, or similar technologies, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1982-05 REVISED 1992-07 REAFFIRMED 2013-01 STABILIZED 2024-09

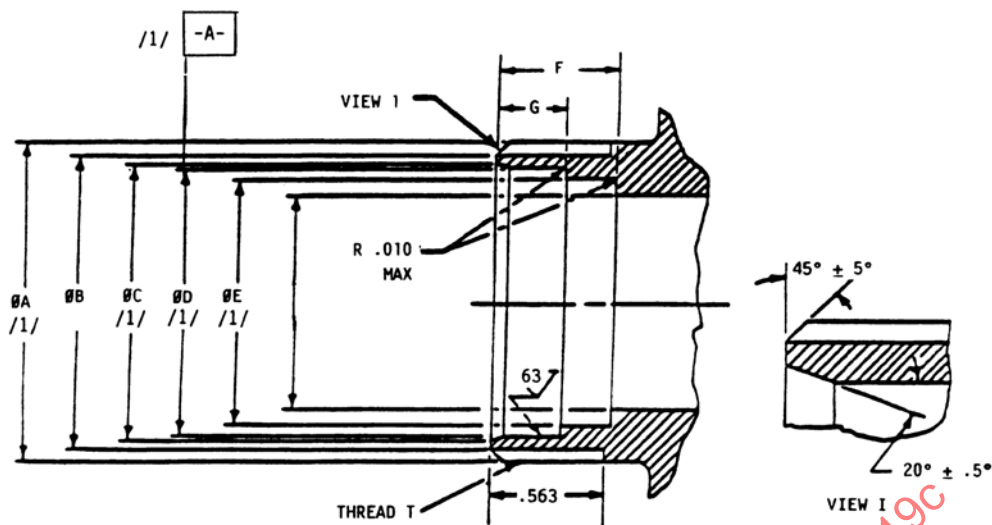


FIGURE 1

TABLE 1 - HALF COUPLING DIMENSIONS

AS1719 DASH NO	TUBE SIZE (REF)	THREAD "T" PER H28/2	A +.0000/-0.0114	B /2/	C /3/	D /4/	E /5/	F	G +.010/-0.000
08	.500	1.000-12 UNF-2A	.9982	.889	.837	.800	.733	.579	.269
10	.625	1.125-12 UNF-2A	1.1232	1.014	.962	.925	.858	.579	.269
12	.750	1.375-12 UNF-2A	1.3731	1.264	1.187	1.135	1.060	.669	.354
16	1.000	1.625-12 UN-2A	1.6232	1.514	1.447	1.395	1.307	.669	.354
20	1.250	1.875-12 UN-2A	1.8732	1.764	1.697	1.645	1.556	.669	.354
24	1.500	2.250-12 UN-2A	2.2482	2.139	2.066	2.014	1.889	.741	.426
28	1.750	2.500-12 UN-2A	2.4981	2.389	2.316	2.264	2.139	.741	.426
32	2.000	2.875-12 UN-2A	2.8731	2.739	2.586	2.524	2.392	.756	.426
36	2.250	3.125-12 UN-2A	3.1231	2.993	2.836	2.774	2.642	.756	.426
40	2.500	3.250-12 UN-2A	3.2481	3.114	3.086	3.024	2.892	.756	.426
44	2.750	3.500-12 UN-2A	3.4981	3.364	3.336	3.274	3.142	.756	.426
48	3.000	3.750-12 UN-2A	3.7481	3.614	3.569	3.507	3.364	.756	.426
56	3.500	4.250-12 UN-2A	4.2480	4.114	4.069	4.007	3.864	.756	.426
64	4.000	4.750-12 UN-2A	4.7480	4.613	4.578	4.516	4.373	.756	.426
72	4.500	5.500-12 UN-2A	5.4980	5.363	5.215	5.133	5.001	.854	.524
80	5.000	6.000-12 UN-2A	5.9979	5.863	5.710	5.627	5.466	.857	.527
88	5.500	6.375-12 UNS-2A	6.3730	6.238	6.190	6.127	5.966	.825	.495