

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
D

AS1736

FEDERAL SUPPLY CLASS
4730

RATIONALE

HARMONIZED 17-7 MATERIAL OPTIONS WITH AS1715.


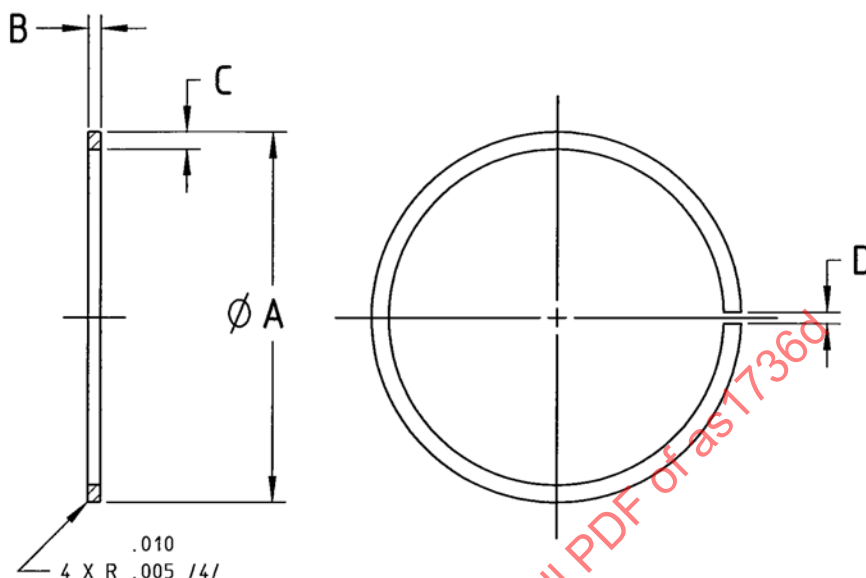


FIGURE 1 - WASHER

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS1736D>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3A

PROCUREMENT SPECIFICATION: /3/ AS1730



AEROSPACE STANDARD

WASHER, COUPLING, RIGID, FIXED CAVITY,
THREADED, FERRULE TYPE TUBE ENDS

AS1736
SHEET 1 OF 3

REV.
D

TABLE 1 - WASHER DIMENSIONS AND WEIGHTS

BASIC NO. AS1736 SIZE CODE /14/	MATERIAL /1/	NOMINAL TUBE SIZE REF	A ±.0025	B	C	D	WEIGHT LB/EA APPROX REF
04	GLASS EPOXY	.250	.5875	.065 - .075	.083 - .090	.029 - .034	.001
05	GLASS EPOXY	.313	.6485	.065 - .075	.083 - .090	.029 - .034	.001
06	GLASS EPOXY	.375	.6935	.065 - .075	.074 - .081	.029 - .034	.001
08	GLASS EPOXY	.500	.8205	.065 - .075	.074 - .081	.029 - .034	.001
10	ALUMINUM	.625	.9655	.059 - .067	.084 - .092	.029 - .065	.002
12	ALUMINUM	.750	1.1315	.059 - .067	.093 - .101	.029 - .065	.002
16	ALUMINUM	1.000	1.3905	.059 - .067	.097 - .105	.029 - .065	.003
20	ALUMINUM	1.250	1.6325	.059 - .067	.093 - .101	.029 - .065	.003
24	ALUMINUM	1.500	1.8825	.075 - .085	.093 - .101	.029 - .065	.004
28	ALUMINUM	1.750	2.1425	.075 - .085	.096 - .104	.029 - .065	.005
32	ALUMINUM	2.000	2.3865	.075 - .085	.093 - .101	.029 - .065	.006
36	ALUMINUM	2.250	2.6425	.085 - .095	.096 - .104	.029 - .065	.007
40	ALUMINUM	2.500	2.8925	.085 - .095	.096 - .104	.029 - .065	.008
44	ALUMINUM	2.750	3.1425	.085 - .095	.096 - .104	.029 - .065	.009
48	ALUMINUM	3.000	3.5175	.085 - .095	.159 - .167	.029 - .065	.015
56	ALUMINUM	3.500	4.0175	.085 - .095	.159 - .167	.029 - .065	.018
64	CRES	4.000	4.5175	.085 - .095	.154 - .162	.029 - .065	.055
72	CRES	4.500	5.0195	.085 - .095	.154 - .163	.029 - .065	.062
80	CRES	5.000	5.5045	.085 - .095	.147 - .155	.029 - .065	.065

NOTES

/1/ MATERIAL (ACCORDING TO SIZE):

- a. GLASS EPOXY IN ACCORDANCE WITH MIL-I-24768/2 (MIL-P-18177) TYPE GEE (G-10)
- b. ALUMINUM ALLOY 2024-T3, T351 OR T3511 IN ACCORDANCE WITH AMS-QQ-A-250/4
- c. ALUMINUM ALLOY 2024-T4 IN ACCORDANCE WITH AMS-QQ-A-225/6 OR AMS-QQ-A-250/4
- d. CORROSION RESISTANT STEEL - 17-4PH IN ACCORDANCE WITH AMS5643, CONDITION H900
- e. CORROSION RESISTANT STEEL - 17-7PH IN ACCORDANCE WITH AMS5528, CONDITION RH950 OR TH950 PER AMS2759/3 OR AMS5529 CONDITION CH900 PER AMS2759/3.

2. FINISH:

- a. GLASS EPOXY - NONE
- b. ALUMINUM ALLOY - ANODIC COATING PER MIL-A-8625, TYPE II /6/
- c. CORROSION RESISTANT STEEL - PASSIVATE PER AMS2700 TYPE 2 OR 8 /6/

/3/ PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED MANUFACTURER LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST FOR PRI-QPL-AS1730 FOR THIS STANDARD. SEE www.eAuditNet.com FOR CURRENT QPL ON-LINE.

	AEROSPACE STANDARD		AS1736 SHEET 2 OF 3	REV. D
	WASHER, COUPLING, RIGID, FIXED CAVITY, THREADED, FERRULE TYPE TUBE ENDS			