

RATIONALE

AS1865 HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

SAE AS1865

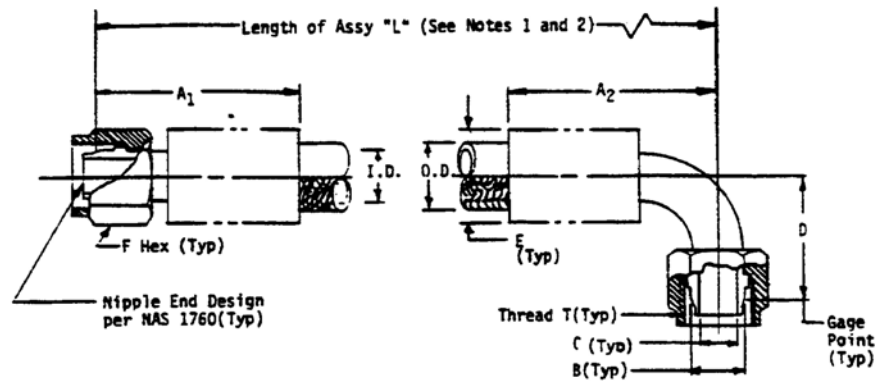


FIGURE 1

TABLE 1

HOSE SIZE DASH NUMBER	HOSE ASSEMBLY SIZE REF.	THREAD T PER MIL-S-8879 REF.	HOSE I.D. MIN.	HOSE O.D. MAX.	A ₁ MAX.	A ₂ MAX.	B GAGE DIA. BASIC	E / I MAX.	F HEX REF.
-03	.125	.3750-24 UNJF-3B	.125	.476	1.59	1.86	.2340	.627	.50
-04	.188	.4375-20 UNJF-3B	.188	.539	1.67	1.86	.2930	.690	.56
-05	.250	.5000-20 UNJF-3B	.250	.601	1.83	2.08	.3500	.752	.62
-06	.313	.5625-18 UNJF-3B	.313	.695	1.97	2.24	.4120	.877	.69
-08	.406	.7500-16 UNJF-3B	.406	.789	2.40	2.66	.5600	1.016	.88
-10	.500	.8750-14 UNJF-3B	.500	.945	2.68	2.94	.6730	1.235	1.00
-12	.625	1.0625-12 UNJ-3B	.625	1.101	3.01	3.86	.8100	1.360	1.25
-16	.875	1.3125-12 UNJ-3B	.875	1.265	2.85	3.67	1.0620	1.546	1.50
-20	1.125	1.6250-12 UNJ-3B	1.125	1.531	3.08	3.88	1.3160	1.921	1.81
-24	1.375	1.8750-12 UNJ-3B	1.375	1.781	3.36		1.5650	2.124	2.12

TABLE 2


SIZE CODE	D		C MIN. DIA. THRU	END FITTING CORRECTION FACTOR FOR "END" TO "END"	
	MIN.	MAX.		STRAIGHT	90° ELBOW
-03			.073	.14	--
-04	.73	.85	.123	.16	--
-05	.88	1.00	.170	.16	--
-06	.99	1.11	.232	.16	--
-08	1.03	1.15	.350	.19	--
-10	1.25	1.37	.450	.20	--
-12	1.89	2.01	.575	.23	--
-16	2.18	2.30	.781	.30	--
-20	2.22	2.34	1.015	.30	--
-24			1.250	.36	--

TABLE 3

HOSE ASSEMBLY LENGTH	AVAILABLE INCREMENTS	TOLERANCE
UNDER 18 INCHES	(NOT LESS THAN) .125 INCH	(PLUS OR MINUS) .125 INCH
18 TO 36 INCHES	(NOT LESS THAN) .250 INCH	(PLUS OR MINUS) .250 INCH
36 TO 50 INCHES	(NOT LESS THAN) .500 INCH	(PLUS OR MINUS) .500 INCH
OVER 50 INCHES	(NOT LESS THAN) 1.000 INCH	(PLUS OR MINUS) 1 PERCENT

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS1865>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION MIL-H-8795

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

HOSE ASSEMBLY, RUBBER, FLARELESS, FIELD
ATTACHABLE FITTING, STRAIGHT TO 90°

SAE AS1865
SHEET 1 OF 2

Copyright 2013 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1987-04 REAFFIRMED 2013-01