


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."



REV.
C

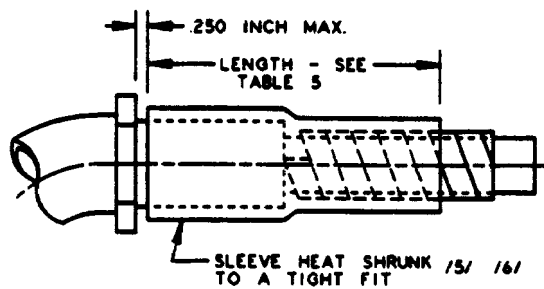


FIGURE 3 - ABRASION SLEEVE RETENTION

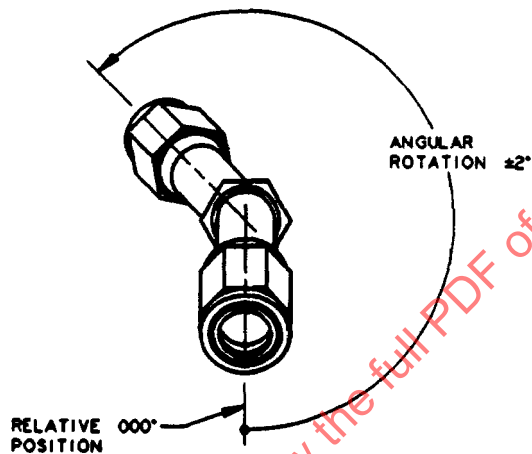


FIGURE 4 - FITTING ANGULAR ORIENTATION




FIGURE 5 - ALTERNATE ELBOW CONFIGURATION /21/

TABLE 1- HOSE AND FITTING DIMENSIONS

HOSE ASSEMBLY NO. AND SIZE CODE	SIZE REF	THREAD T PER MIL-S-8879 REF	A MAX	B /2/ DIA MIN	C HEX REF	E MIN	E MAX
AS1914E	.250	.4375-24UNJS-3B	1.69	.135	.56	.795	.983
AS1914G	.375	.5625-20UNJS-3B	2.21	.240	.69	1.000	1.125
AS1914H	.500	.7188-20UNJS-3B	2.10	.340	.88	1.033	1.240
AS1914J	.625	.8438-18UNJS-3B	2.29	.410	1.00	1.258	1.445
AS1914K	.750	1.0000-16UNJ-3B	2.79	.510	1.125	1.530	1.954
AS1914M	1.000	1.2500-14UNJS-3B	3.20	.760	1.50	1.795	1.920

TABLE 2 - HOSE OR SLEEVE OUTSIDE DIAMETERS

SLEEVE CODE	SLEEVE MATERIAL	TEMP. LIMIT °F	HOSE OR SLEEVE OUTSIDE DIAMETERS (MAX-MIN) /4/ .250	HOSE OR SLEEVE OUTSIDE DIAMETERS (MAX-MIN) /4/ .375	HOSE OR SLEEVE OUTSIDE DIAMETERS (MAX-MIN) /4/ .500	HOSE OR SLEEVE OUTSIDE DIAMETERS (MAX-MIN) /4/ .625	HOSE OR SLEEVE OUTSIDE DIAMETERS (MAX-MIN) /4/ .750	HOSE OR SLEEVE OUTSIDE DIAMETERS (MAX-MIN) /4/ 1.000
-	(-) INDICATES HOSE ONLY NO SLEEVE (SEE AS1339)	400	--	--	--	--	--	--
A	ABRASION SLEEVE TUBULAR /5/ (TFE-AS1291-CODE B)	400	.500/.440	.600/.540	.730/.670	.840/.780	1.110/1.050	1.400/1.340
B	ABRASION SLEEVE COIL /6/ (NYLON AS1294)	275	.450/.390	.550/.490	.695/.635	.810/.750	1.080/1.020	1.360/1.300
C	FIRE SLEEVE (AS1072 SIL-FG) (15 min) /7/ /8/ /11/	400	.625/.500	.750/.625	.875/.750	1.000/.875	1.250/1.125	1.500/1.375
E	ABRASION SLEEVE SHRINK-ON (FEP) (M23053/11) /10/	350	.424/.374	.540/.480	.665/.615	.790/.730	1.070/1.010	1.350/1.290
F	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073 - CODE B) /10/	275	.450/.400	.560/.505	.695/.645	.810/.750	1.080/1.020	1.360/1.300
H	FIRE SLEEVE INTEGRAL SILICONE (15 min) /11/ /12/	400	.660/.600	.745/.685	.895/.835	1.005/.945	1.240/1.160	1.515/1.455
K	INTEGRAL ABRASION SLEEVE /9/ (BRAIDED) POLYESTER	300	.490/.444	.570/.535	.695/.650	.800/.760	1.070/1.030	1.350/1.310
L	ABRASION SLEEVE COIL /6/ (PTFE-AS1293)	400	.500/.440	.600/.540	.730/.670	.862/.802	1.110/1.050	1.400/1.340

TABLE 3 - HOSE ASSEMBLY LENGTH TOLERANCES

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 in	±.125 in
18 TO 36 in EXCLUSIVE	±.250 in
36 TO 50 in EXCLUSIVE	±.500 in
50 in AND OVER	±1%

**AEROSPACE STANDARD**

(R) HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,
CRES REINFORCED, 400 °F, 3000 PSI, LIGHTWEIGHT,
BEAM SEAL, 90° TO 90°

AS1914
SHEET 3 OF 6

REV.
C

TABLE 4 - WEIGHTS

HOSE OR SLEEVE CODE	HOSE OR TYPE SLEEVE	UNITS	REFERENCE WEIGHT LB/IN /22/ HOSE SIZE .250	REFERENCE WEIGHT LB/IN /22/ HOSE SIZE .375	REFERENCE WEIGHT LB/IN /22/ HOSE SIZE .500	REFERENCE WEIGHT LB/IN /22/ HOSE SIZE .625	REFERENCE WEIGHT LB/IN /22/ HOSE SIZE .750	REFERENCE WEIGHT LB/IN /22/ HOSE SIZE 1.000
-	HOSE ONLY	LB/IN	.009	.015	.020	.027	.058	.085
A	ABRASION SLEEVE (TFE-AS1291-B)	LB/IN	.003	.004	.004	.005	.007	.009
B	ABRASION SLEEVE (NYLON AS1294)	LB/IN	.001	.002	.003	.003	.004	.005
C	FIRESLEEVE (15 min) AS1072	LB/IN	.007	.009	.011	.012	.017	.021
E	ABRASION SLEEVE (FEP)	LB/IN	.002	.003	.003	.005	.006	.007
F	ABRASION SLEEVE (AS1073B)	LB/IN	.002	.003	.003	.004	.005	.006
H	FIRESLEEVE INTEGRAL (15 min) ON HOSE	LB/IN	.019	.027	.035	.047	.099	.117
K	ABRASION SLEEVE POLYESTER WITH HOSE	LB/IN	.012	.016	.022	.030	.060	.090
L	ABRASION SLEEVE (PTFE-AS1293)	LB/IN	.003	.004	.005	.005	.006	.007
NONE	FIRESLEEVE CLAMP /24/	LB/EA	.025	.025	.025	.026	.026	.033
NONE	FITTING END (90°) /24/	LB/EA	.060	.100	.150	.250	.430	.680

TABLE 5 - SLEEVE LENGTHS

HOSE SIZE	LENGTH (in)
.250/.375	2.00 ± .25
.500/.625	2.50 ± .25
.750/1.000	3.00 ± .25

TABLE 6 - SPHERICAL BALL SIZE FOR DETERMINING
MINIMUM HOSE ASSEMBLY ID /2/

HOSE SIZE	ELBOW FITTING
E	.115
G	.204
H	.289
J	.349
K	.434
M	.646

**AEROSPACE STANDARD**

(R) HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,
CRES REINFORCED, 400 °F, 3000 PSI, LIGHTWEIGHT,
BEAM SEAL, 90° TO 90°

AS1914
SHEET 4 OF 6

REV.
C