

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS21004

FEDERAL SUPPLY CLASS
5940

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS21004D, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS21004D, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as21004

THIRD ANGLE PROJECTION



ISSUED 2002-02

CUSTODIAN: SAE A-10

PROCUREMENT SPECIFICATION: MIL-T-7928

SAE The Engineering Society
For Advancing Mobility
INTERNATIONAL
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

TERMINAL, LUG, UNINSULATED, RECTANGULAR
TONGUE, CRIMP STYLE, COPPER, TYPE I, CLASS 1
FOR 175°C TOTAL CONDUCTOR TEMPERATURE

AS21004
SHEET 1 OF 3

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

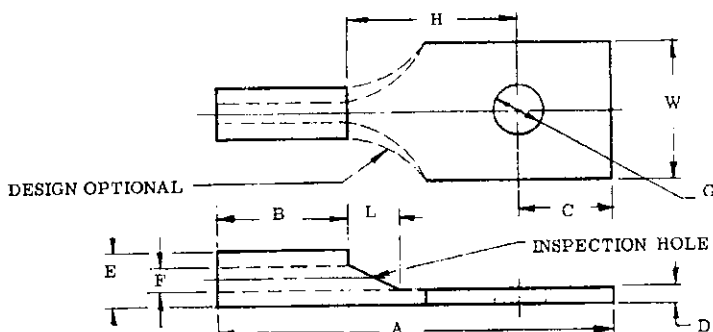


TABLE I

DASH NO.	WIRE SIZE	STUD SIZE	A MAX	B MIN	C ±.010	D	E	F	G		H MIN	L MAX	W ±.005	MIL-T-16366 (SHIPS) REFERENCE
									MAX	MIN				
22		2 (.080)	.759	.240	.110				.098	.090	.203	.125	.182	
1		4 (.112)	.826		.143				.122	.114	.237	.125	.237	L-86, 1-2
2		5 (.125)	.858		.143				.137	.129	.277	.125	.277	L-83, 1-2
3		6 (.138)	1.040	.250	.227				.178	.168	.465	.250	.302	L-82, 1-2
4	22-18	8 (.164)				.037	.165	.070	.152	.142	.465	.250	.302	L-81, 1-2
5		4 (.112)			.195	.023	.110	.052	.122	.114	.404	.156	.237	L-85, 1-2
6		6 (.138)	.980						.152	.142	.404	.166	.237	L-84, 1-2
7		8 (.164)	1.290		.310				.178	.168	.621	.281	.390	L-80, 1-2
8		4 (.112)	.889		.143				.122	.114	.237	.125	.237	L-86, 2-1/2-4
9		5 (.125)	.921		.143				.137	.129	.277	.125	.277	L-83, 2-1/2-4
10	16-14	6 (.138)	1.075	.250	.227	.037	.192	.090	.152	.142	.465	.250	.302	L-82, 2-1/2-4
11		8 (.164)							.178	.168	.621	.281	.390	L-81, 2-1/2-4
12		4 (.112)	1.043		.195	.023	.139	.081	.122	.114	.404	.156	.237	L-85, 2-1/2-4
13		6 (.138)							.152	.142	.404	.156	.237	L-84, 2-1/2-4
14		8 (.164)	1.294		.310				.178	.168	.621	.281	.390	L-80, 2-1/2-4
15		4 (.112)	1.014		.143				.122	.114	.237	.125	.237	L-86, 6-9
16		5 (.125)	1.146		.143				.137	.129	.277	.125	.277	L-83, 6-9
17		6 (.138)			.227				.178	.168	.465	.250	.302	L-82, 6-9
18	12-10	8 (.164)	1.200	.250		.045	.255	.135	.152	.142	.465	.250	.302	L-81, 6-9
19		4 (.112)			.195	.037	.199	.128	.122	.114	.404	.156	.237	L-85, 6-9
20		6 (.138)	1.168						.152	.142	.404	.156	.237	L-84, 6-9
21		8 (.164)	1.419		.310				.178	.168	.621	.281	.390	L-80, 6-9

TABLE II (REF)

WIRE SIZE	NAVY CABLE SIZE
22-18	1 (1)
	1 (7)
	1 (10)
	1-1/2 (1)
	1-1/2 (7)
	1-1/2 (16)
	1-1/2 (41)
	2 (7)
	2-1/2 (1)
	2-1/2 (19)
	2-1/2 (26)
16-14	3 (7)
	4 (1)
	4 (19)
	4 (7)
	4 (41)
12-10	6 (7)
	6 (19)
	9 (7)
	9 (37)

REQUIREMENTS:

1. MATERIAL: SEE ACQUISITION SPECIFICATION.
2. FINISH: TIN PLATED. SEE ACQUISITION SPECIFICATION.
3. DIMENSIONS IN INCHES.
4. TENSILE STRENGTH: THE TENSILE STRENGTH SHALL BE THAT SPECIFIED IN ACQUISITION SPECIFICATION.
5. DESIGN AND CONSTRUCTION: LUG TERMINALS SHALL BE OF THE DESIGN, CONSTRUCTION AND PHYSICAL DIMENSIONS SPECIFIED IN THE FIGURE AND TABLE I AND SHALL MEET THE PERFORMANCE REQUIREMENTS OF MIL-T-7928 WHEN CRIMPED ON MIL-C-915 AND MIL-C-2194 CABLE WITH A MIL-C-22520/25 CRIMPING TOOL AND MIL-C-22520/24 CRIMPING TOOL. THIS STANDARD DEPICTS ONLY GENERAL DESIGN CHARACTERISTICS AND IS NOT INTENDED TO LIMIT SPECIFIC MANUFACTURING PROCESSES. WIRE INSULATION SUPPORT NOT REQUIRED.
6. THE COMBINATION OF DIMENSIONS H, C AND L MUST PERMIT WIRED TERMINALS TO BE STACKED ON ONE STUD ON THE FOLLOWING TERMINAL BOARDS IN THE QUANTITY SHOWN.