

AS21152

ADOPTION NOTICE

AS21152, " Bearing, Ball, Rod End, Double Row, Precision, Hollow Shank, Self-Aligning, Airframe, Type III, -65 Degrees to 300 F Degrees," was adopted on 3 March 1999 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to DoD Adopting Activity: Defense Supply Center Richmond, DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610. DoD activities may obtain copies of this standard from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. The private sector and other government agencies may purchase copies from the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

Custodians:
Army -AV
Navy - AS
Air Force - 99

Adopting Activity:
DLA - GS
(Project 3110-1153)

FSC 3110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
3110REV.
B

AS21152

NOTICE

THIS SPECIFICATION SHEET COVERS SEALED, SELF-ALIGNING, AIRFRAME, ANTIFRICTION, DOUBLE ROW, HOLLOW SHANK, ROD END BALL BEARINGS WITH APPLICATION IN TEMPERATURE RANGES OF -65°F TO 300°F.

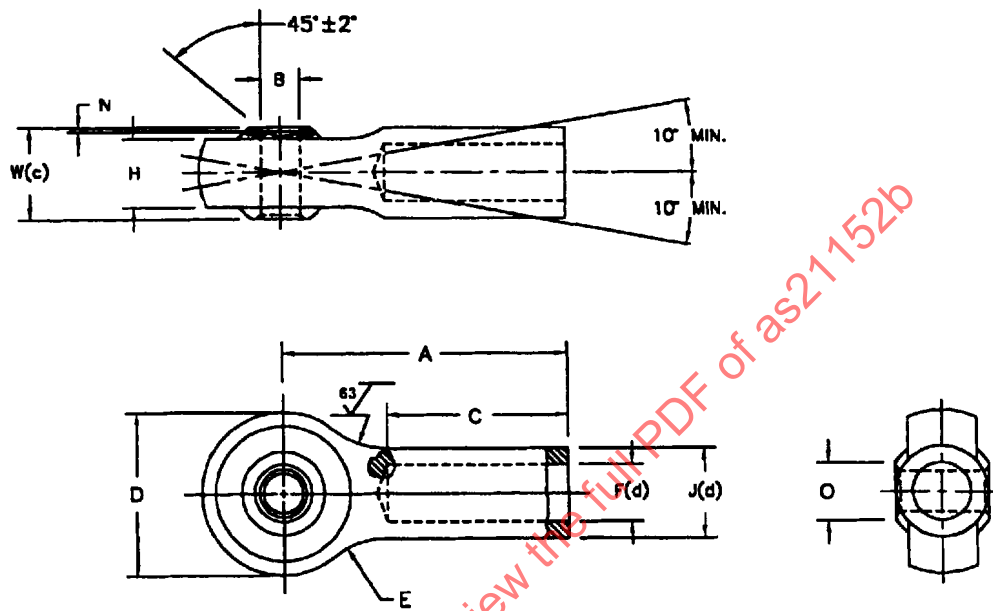

MS21152 DASH NUMBER	BORE SIZE NOM.	A ±.010	B +.0000 -.0003 DIA.	C ±.031 ±.010	D ±.010	E NOM. RAD.	F ±.010 (d)	H ±.010	J (d) DIA.	N (a) +.015 -.000	O MIN. DIA.	W (c) +.000 -.005	WGT LBS. APPROX.
-1	3/16	1.375	.1900	.875	.781	.390	.272	.328	.430 .428		.276	.437	.06
-2		1.875		1.219		.490	.386		.625 .623				.12
-3	1/4	1.625	2500	.875	.938	.500	.515	.438	.438 .436	.005	.340	.593	.08
-4				.760		.468	.346		.625 .623				.12
-5		1.875		1.125		.500	.500						.09

FIGURE 1

PREPARED BY AIRFRAME CONTROL BEARINGS GROUP

PROCUREMENT SPECIFICATION: AS6039

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

BEARING, BALL, ROD END, DOUBLE ROW,
PRECISION, HOLLOW SHANK, SELF-ALIGNING,
AIRFRAME, TYPE III, -65° TO 300°F

AS21152
SHEET 1 OF 2

REV.
B

Copyright 1998 Society of Automotive Engineers, Inc.
All rights reserved.

QUESTIONS REGARDING THIS DOCUMENT:
TO PLACE A DOCUMENT ORDER:

(724) 772-8510
(724) 776-4970

FAX: (724) 776-0243
Distributed under license from the IHS Archive

SAE WEB ADDRESS: <http://www.sae.org>

Printed in the U.S.A.

ISSUED 1998-01 REVISED 1998-04

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.