


REV.
C

AS21152

NOTICE

THIS SPECIFICATION SHEET COVERS SEALED, SELF-ALIGNING, AIRFRAME, ANTIFRICTION, DOUBLE ROW, HOLLOW SHANK, ROD END BALL BEARINGS WITH APPLICATION IN TEMPERATURE RANGES OF -65°F TO 300°F.

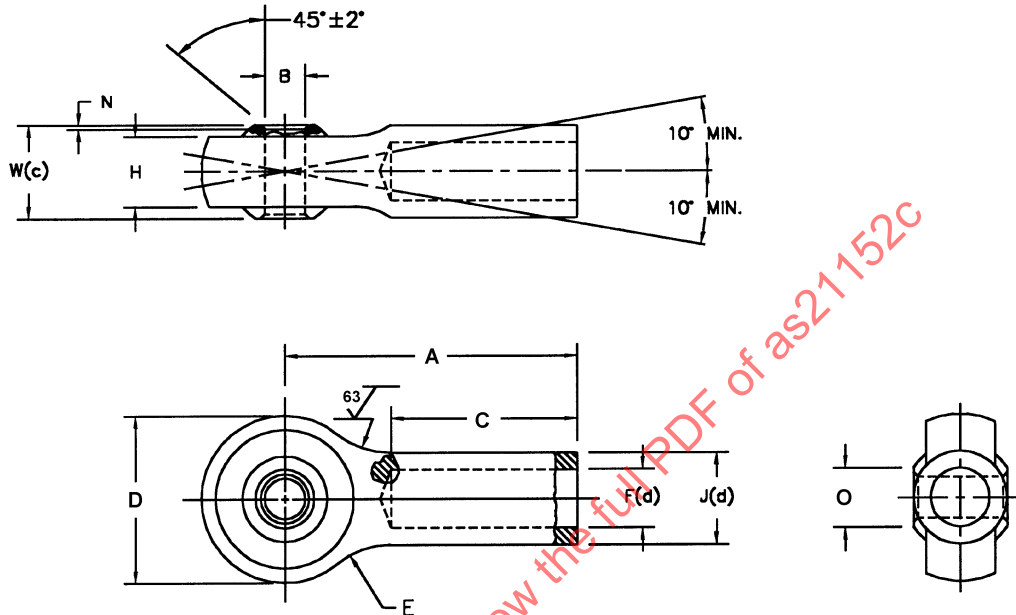

MS21152 DASH NUMBER	BORE SIZE NOM.	A	B	C	D	E	F	H	J (d)		N (a)	O	W (c)	WGT LBS. APPROX.
		±.010	+.0000 -.0003 DIA.	±.031	±.010	NOM. RAD.	±.010 (d)	±.010	DIA.		+.015 -.000	MIN. DIA.	+.000 -.005	
-1	3/16	1.375	.1900	.875	.781	.390	.272	.328	.430	.428	.005	.276	.437	.06
-2	1/4	1.875	.2500	.875	.938	.490	.386	.438	.625	.623		.340	.593	.12
-3		1.625		.875		.500	.515		.438	.436				.08
-4		1.875		.760		.468	.346		.625	.623				.12
-5		1.875		1.125		.500	.500							.09

FIGURE 1

PREPARED BY AIRFRAME CONTROL BEARINGS GROUP

PROCUREMENT SPECIFICATION: AS6039

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD
BEARING, BALL, ROD END, DOUBLE ROW,
PRECISION, HOLLOW SHANK, SELF-ALIGNING,
AIRFRAME, TYPE III, -65° TO 300°F

AS21152
SHEET 1 OF 2

REV.
C