

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
B

AS21910

FEDERAL SUPPLY CLASS
4730

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

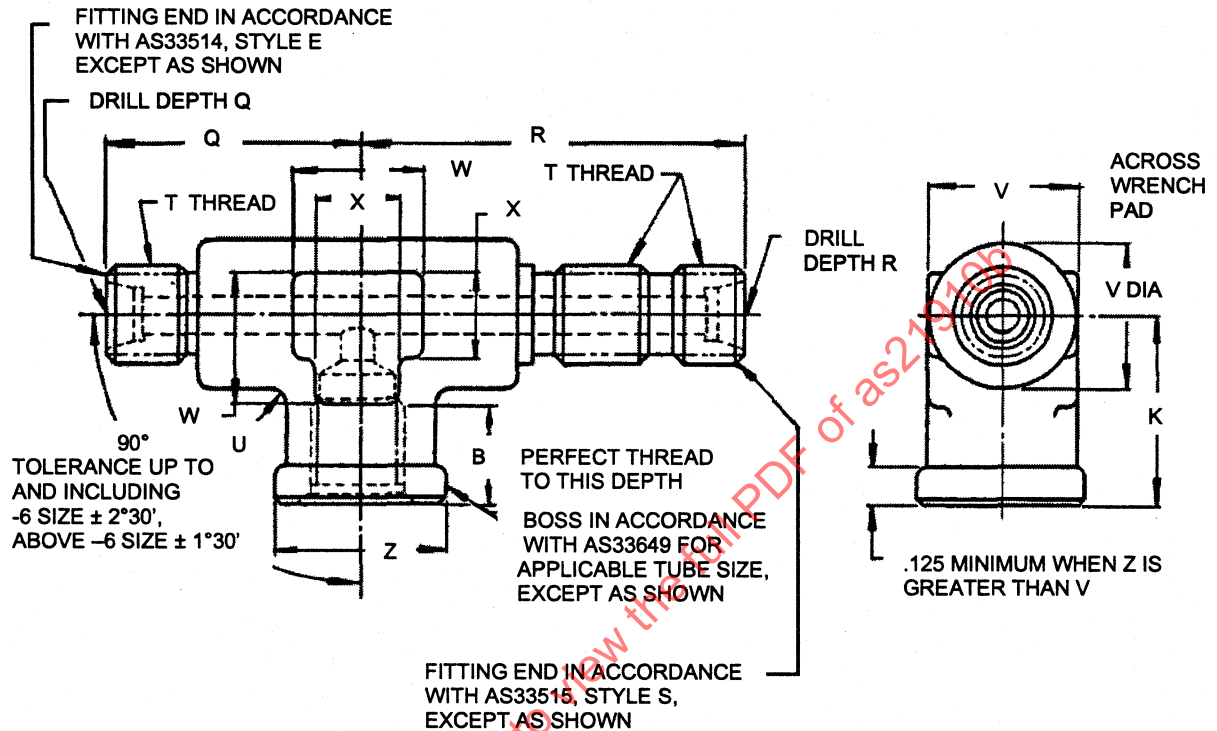


FIGURE 1 - TEE, BULKHEAD, FLARELESS TUBE, INTERNAL THREAD ON SIDE

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: AS18280

SAE Aerospace
An SAE International Group

(R)

AEROSPACE STANDARD

TEE, BULKHEAD, FLARELESS TUBE,
INTERNAL THREAD ON SIDE

AS21910
SHEET 1 OF 4

**REV.
B**

Copyright 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1998-03 REVISED 2003-06 REAFFIRMED 2007-07

REV. B	TABLE 1A - DIMENSIONS B-U							
	DASH NO.	NOMINAL TUBE SIZE	T THREAD AS8879	B MIN	K +.047 -.000	Q +.047 -.000	R +.047 -.000	U RAD
AS21910	-2	.125	.3125-24 UNJF-3A	.375	.625	.844	.375	.063
	-3	.188	.3750-24 UNJF-3A	.406	.688	.906	1.453	.094
	-4	.250	.4375-20 UNJF-3A	.438	.750	1.094	1.672	.094
	-5	.313	.5000-20 UNJF-3A	.438	.750	1.094	1.672	.094
	-6	.375	.5625-18 UNJF-3A	.469	.813	1.156	1.891	.125
	-8	.500	.7500-16 UNJF-3A	.562	1.000	1.344	2.031	.125
	-10	.625	.8750-14 UNJF-3A	.625	1.156	1.500	2.250	.125
	-12	.750	1.0625-12 UNJ-3A	.688	1.344	1.641	2.438	.125
	-16	1.000	1.3125-12 UNJ-3A	.688	1.531	1.844	2.656	.125
	-20	1.250	1.6250-12 UNJ-3A	.688	1.719	1.984	2.797	.125
	TABLE 1B - DIMENSIONS V-Z							
	DASH NO.	V	W APPROX	X APPROX	Z DIA	WEIGHT, LB/EA, APPROX, REF.		
STEEL						AL ALLOY	TI ALLOY	
-2	.500	.469	.313	.563	.051	.018	.029	
-3	.563	.500	.313	.625	.104	.039	.060	
-4	.750	.688	.438	.750	.233	.083	.134	
-5	.750	.688	.438	.750	.278	.099	.160	
-6	.875	.781	.438	.875	.326	.116	.188	
-8	1.063	.906	.500	1.063	.554	.197	.319	
-10	1.063	.906	.500	1.188	.579	.206	.334	
-12	1.313	1.094	.625	1.438	1.012	.360	.583	
-16	1.625	1.313	.750	1.688	1.340	.455	.773	
-20	1.875	1.500	.875	2.000	1.950	.672	1.125	
NOTES:								
1. MATERIAL:								
SEE PROCUREMENT SPECIFICATION.								
ALLOY STEEL								
ALUMINUM ALLOY								
CORROSION RESISTANT STEEL								
TITANIUM ALLOY								
2. FINISH: SEE PROCUREMENT SPECIFICATION								
3. BREAK EDGES .003 TO .015 UNLESS OTHERWISE SPECIFIED.								
4. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016, ANGLES ±0°30'.								
 An SAE International Group		AEROSPACE STANDARD				AS21910 SHEET 2 OF 4		REV. B
		(R)	TEE, BULKHEAD, FLARELESS TUBE, INTERNAL THREAD ON SIDE					

REV. B	5. PART NUMBERS:				
	DASH “-” IN PART NUMBER FOR 4130 ALLOY STEEL IS CANCELLED AND REPLACED, SEE 7 /A/ ADD “V(SIZE)P” IN PLACE OF DASH FOR CORROSION RESISTANT STEEL (15-5PH), CADMIUM PLATED ADD “V” IN PLACE OF DASH FOR CORROSION RESISTANT STEEL (15-5PH), NOT CADMIUM PLATED ADD “D” IN PLACE OF DASH FOR ALUMINUM ALLOY (2024): CANCELLED AND REPLACED, SEE 7 /C/ ADD “W” IN PLACE OF DASH FOR ALUMINUM ALLOY (7075) ADD “J” IN PLACE OF DASH FOR CORROSION RESISTANT STEEL (TYPE 304) ADD “K” IN PLACE OF DASH FOR CORROSION RESISTANT STEEL (TYPE 316) ADD “R” AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL (TYPE 321) ADD “S” AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL (TYPE 347): CANCELLED, SEE 7 /D/ ADD “T” AFTER DASH NUMBER FOR TITANIUM ALLOY (6AL-4V) EXAMPLES OF PART NUMBERS: MS21910-4 TEE, .250 TUBING, 4130 ALLOY STEEL IS CANCELLED AND REPLACED, SEE 7 /A/ MS21910V4P TEE, .250 TUBING, CORROSION RESISTANT STEEL (15-5PH), CADMIUM PLATED MS21910V4 TEE, .250 TUBING, CORROSION RESISTANT STEEL (15-5PH), NOT CADMIUM PLATED MS21910D4 TEE, .250 TUBING, ALUMINUM ALLOY (2024) IS CANCELLED AND REPLACED, SEE 7 /C/ MS21910W4 TEE, .250 TUBING, ALUMINUM ALLOY (7075) MS21910J4 TEE, .250 TUBING, CORROSION RESISTANT STEEL (TYPE 304) MS21910K4 TEE, .250 TUBING, CORROSION RESISTANT STEEL (TYPE 316) MS21910-4R TEE, .250 TUBING, CORROSION RESISTANT STEEL (TYPE 321) MS21910-4S TEE, .250 TUBING, CORROSION RESISTANT STEEL (TYPE 347) IS CANCELLED, SEE 7 /D/ MS21910-4T TEE, .250 TUBING, TITANIUM ALLOY (6AL-4V) 6. TITANIUM NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS. 7. SEE TABLE 2 FOR CANCELLED AND SUPERSEDED DOCUMENT AND PART NUMBERS.				
AS21910	TABLE 2 - CANCELLED AND SUPERSEDED DOCUMENT AND PART NUMBERS				
	CANCELLED DOCUMENT NUMBER	PART NUMBERS	SUPERSESSON NOTES	SUPERSEDING DOCUMENT NUMBER	SUPERSEDING PART NUMBERS
	MS21910	MS21910-(2 THRU 20)	/A/	AS21910	MS21910V(2 THRU 20)P
	MS21910	MS21910C(2 THRU 20)	/B/	AS21910	MS21910J(2 THRU 20), MS21910K(2 THRU 20), OR MS21910-(2 THRU 20)R
	MS21910	MS21910D(2 THRU 20)	/C/	AS21910	MS21910W(2 THRU 20)
	MS21910	MS21910W(2 THRU 20)	NONE	AS21910	MS21910W(2 THRU 20)
	MS21910	MS21910J(2 THRU 20)	NONE	AS21910	MS21910J(2 THRU 20)
	MS21910	MS21910K(2 THRU 20)	NONE	AS21910	MS21910K(2 THRU 20)
	MS21910	MS21910-(2 THRU 20)R	NONE	AS21910	MS21910-(2 THRU 20)R
	MS21910	MS21910-(2 THRU 20)S	/D/	AS21910	MS21910-(2 THRU 20)R
	MS21910	MS21910-(2 THRU 20)T	NONE	AS21910	MS21910-(2 THRU 20)T
/A/ PARTS CODED “-” FOR 4130 ALLOY STEEL ARE NOT TO BE MANUFACTURED. PARTS CODED “V(SIZE)P” FOR CORROSION RESISTANT STEEL (15-5PH) WITH CADMIUM PLATE SHALL BE FURNISHED IN LIEU OF “-” CODED (4130) PARTS. PARTS CODED “-” FOR 4130 ALLOY STEEL MAY BE PROCURED UNTIL 12-31-06.					
/B/ PARTS CODED “C” FOR CORROSION RESISTANT STEEL (TYPE 303) ARE NOT TO BE MANUFACTURED. PARTS CODED “J”, “K” OR “R” FOR CORROSION RESISTANT STEEL (TYPES 304, 316, OR 321, RESPECTIVELY) SHALL BE FURNISHED IN LIEU OF “C” CODED PARTS AT SUPPLIERS OPTION.					
/C/ PARTS CODED “D” FOR ALUMINUM ALLOY 2024 ARE NOT TO BE MANUFACTURED. PARTS CODED “W” FOR ALUMINUM ALLOY 7075 SHALL BE FURNISHED IN LIEU OF 2024 (D CODE) PARTS. PARTS CODED “D” FOR ALUMINUM ALLOY 2024 MAY BE PROCURED UNTIL 12-31-06.					
/D/ PARTS CODED “S” FOR CORROSION RESISTANT STEEL (TYPE 347) ARE NOT TO BE MANUFACTURED. PARTS CODED “S” MAY BE USED UNTIL EXISTING STOCK IS DEPLETED. PARTS CODED “R” FOR CORROSION RESISTANT STEEL (TYPE 321) SHALL BE FURNISHED IN LIEU OF “S” CODED PARTS.					
 An SAE International Group		AEROSPACE STANDARD			AS21910 SHEET 3 OF 4
		(R)	TEE, BULKHEAD, FLARELESS TUBE, INTERNAL THREAD ON SIDE		
					REV. B