


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


REV. A	Submitted for recognition as an American National Standard		FEDERAL SUPPLY CLASS 3110	
	AS24463			
NOTICE THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS24463H AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS24463H. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED. THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT. UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.				
			THIRD ANGLE PROJECTION 	
PREPARED BY AIRFRAME CONTROL BEARINGS GROUP				
 SAE The Engineering Society For Advancing Mobility Land Sea Air and Space® 400 Commonwealth Drive, Warrendale, PA 15096-0001		AEROSPACE STANDARD		AS24463 SHEET 1 OF 3
		BEARING, ROLLER, NEEDLE-SINGLE ROW, HEAVY DUTY, SELF-ALIGNING, TYPE III, ANTIFRICTION, INCH		
				REV. A

SAENORM.COM : Click to view the full PDF of as24463

REV.
A

AS24463

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-3990.

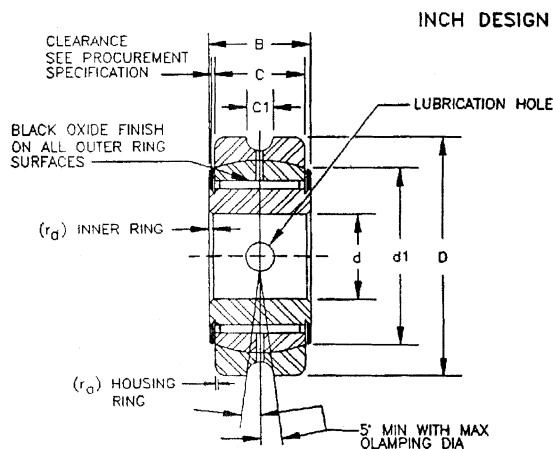

DIMENSIONS IN INCHES

DASH NO	ϕd BORE	D HOUSING RING OUTSIDE DIA	D OVERALL WIDTH	C OUTER RING WIDTH	d_1 WASHER OUTSIDE DIA	C_1 LUBRI- CATION GROOVE WIDTH	r_a 1/ FILLET MAX	TOTAL RADIAL PLAY MAX	d_a CLAMPING DIAMETER		LIMIT LOAD RATING LBF	MASS (APPROX) LB	HOUSING SIZE GAGE +0.0000 -0.0001	
									MAX	MIN			LOW	HIGH
-3	0.1900	0.8750	0.312	0.218	0.625	0.042	0.022	0.0029	0.525	0.438	1800	0.041	0.8742	0.8747
-4	0.2500	0.9375	0.375	0.281	0.687	0.093	0.022	0.0029	0.688	0.516	2870	0.053	0.9367	0.9372
-5	0.3125	1.0625	0.437	0.344	0.750	0.093	0.022	0.0029	0.734	0.578	4070	0.079	1.0617	1.0622

DIMENSIONS IN MILLIMETERS

DASH NO	ϕd BORE	D HOUSING RING OUTSIDE DIA	D OVERALL WIDTH	C OUTER RING WIDTH	d_1 WASHER OUTSIDE DIA	C_1 LUBRI- CATION GROOVE WIDTH	r_a 1/ FILLET MAX	TOTAL RADIAL PLAY MAX	d_a CLAMPING DIAMETER		LIMIT LOAD RATING N	MASS (APPROX) KG	HOUSING SIZE GAGE +0.0000 -0.0003	
									MAX	MIN			LOW	HIGH
-3	4.826	22.225	7.92	5.54	15.88	1.37	0.6	0.074	15.88	11.13	8000	0.019	22.205	22.217
-4	6.350	22.812	9.52	7.14	17.45	2.36	0.6	0.074	17.48	13.11	12700	0.024	23.792	23.605
-5	7.938	26.988	11.10	8.74	19.05	2.36	0.6	0.074	18.64	14.68	18100	0.036	26.967	26.950

1/ THE CHAMFER ON BEARINGS MUST CLEAR THE MAXIMUM FILLET RADIUS GIVEN IN THE TABLE.
THIS SPECIFICATION DOES NOT CONTROL BEARING CHAMFER CONTOURS.