

AS25043

FEDERAL SUPPLY CLASS
5935

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS25043K, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS25043K, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of as25043

THIRD ANGLE PROJECTION



CUSTODIAN: SAE AE-8/AE-8C1

PROCUREMENT SPECIFICATION: MIL-C-5015


SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

COVER, ELECTRICAL CONNECTOR,
RECEPTACLE, AN TYPE

AS25043
SHEET 1 OF 3

ISSUED 2004-06

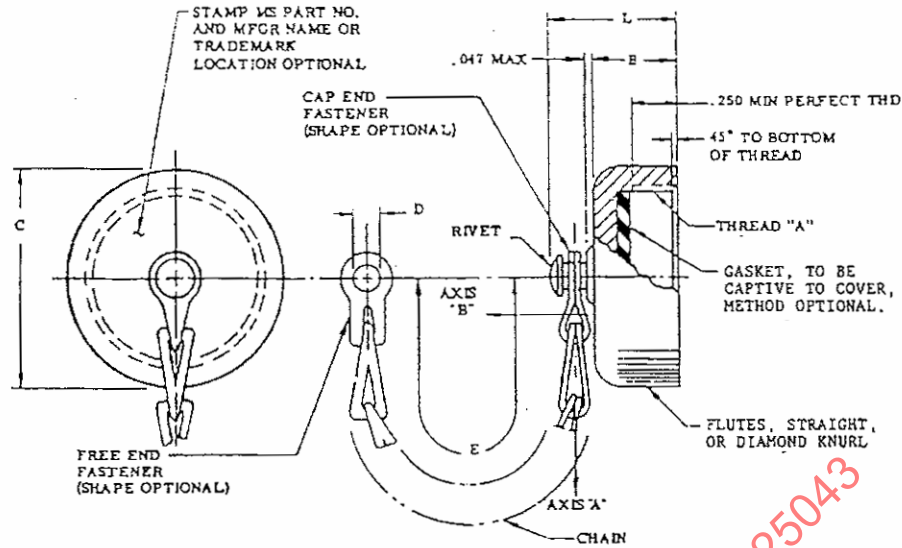

DASH NO.	COUPLING SIZE	THREAD A	B MAX	C MAX DIA.	D +.010 -.005 DIA	E + ONE LWR	L MAX
-8DA	8S	1-2-28 UNEF-2B		.688		4.000	
-10DA	10S, 10SL	5-8-24 UNEF-2B		.813			
-12DA	12, 12S	3-4-20 UNEF-2B		1.000			
-14DA	14, 14S	7-8-20 UNEF-2B		1.125		4.500	.750
-16DA	16, 16S	1-20 UNEF-2B		1.188	.140		
-18DA	18	1-1/8-18 UNEF-2B	.469	1.344			
-20DA	20	1-1/4-18 UNEF-2B		1.469		5.000	
-22DA	22	1-3/8-18 UNEF-2B		1.594			
-24DA	24	1-1/2-18 UNEF-2B		1.719	.171	5.500	
-26DA	26	1-5/4-18 UNS-2B		1.969			
-32DA	32	2-18 UNS-2B		2.219			
-36DA	36	2-1/4-18 UN-2B		2.469	.187	7.750	.812
-40DA	40	2-1/2-18 UN-2B	.521	2.719			
-44DA	44	2-3/4-18 UN-2B		2.969			
-48DA	48	3-18 UN-2B		3.188			

- (a) MATERIAL: COVER: ALUMINUM ALLOY, QQ-A-225/3, /5, /6 OR /8 CONDITION T, OR ASTM B85 ALLOY NUMBERS S12A, S12B, SC84A, SC84B.
GASKET: SILICONE ELASTOMER DISK (THICKNESS .050 - .070)
CHAIN: STAINLESS STEEL SASH CHAIN, RR-C-271, TYPE II, CLASS 3, GRADE NO. 8, PASSIVATED.
CHAIN END FASTENERS: COMMERCIAL GRADE OF STAINLESS STEEL, PASSIVATED.
- (b) FINISH A - BLACK ANODIZE PER MIL-A-8625 TYPE II, CLASS 2 (MINIMUM THICKNESS .0006).
- (c) THREADS SHALL BE IN ACCORDANCE WITH MIL-S-7742.
- (d) QUALIFICATION: FOR QUALIFICATION ONE PROTECTIVE COVER OF EACH SHELL SIZE WITH MATING CLASS F OR R CONNECTORS SHALL BE SUBJECTED TO THE FOLLOWING TESTS OF MIL-C-5015: EXAMINATION OF PRODUCTS, CORROSION, AIR LEAKAGE, AND TENSILE STRENGTH.
- (e) TENSILE STRENGTH: THE PROTECTIVE COVER AND CHAIN ASSEMBLY SHALL WITHSTAND A TENSILE LOAD OF 25 POUNDS APPLIED TO AXIS "A" AND AXIS "B" FOR 5 MINUTES.
- (f) REMOVE ALL BURRS AND SHARP EDGES.
- (g) DIMENSIONS IN INCHES.