

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS25064

FEDERAL SUPPLY CLASS
5975

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS25064 REV B AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS25064 REV B. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.


THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as25064

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS25064>

THIRD ANGLE PROJECTION



ISSUED 1999-07 REAFFIRMED 2009-11

PREPARED BY SAE COMMITTEE AE-4

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

CONDUIT, FLEXIBLE, RADIO FREQUENCY
SHIELDING

AS25064
SHEET 1 OF 5

Copyright 2009 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: CustomerService@sae.org SAE WEB ADDRESS: <http://www.sae.org>

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: (CID) A-A-52440.

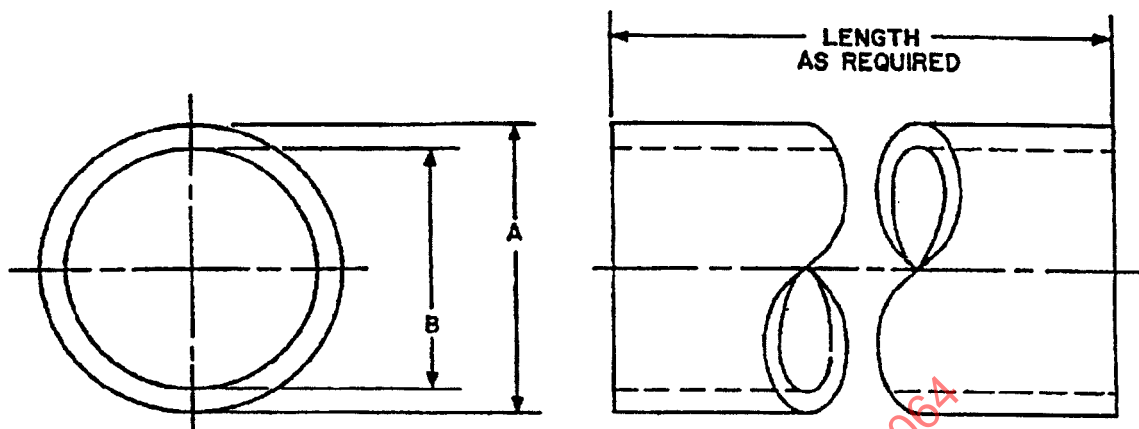


FIGURE 1. CONDUIT, FLEXIBLE, RADIO FREQUENCY SHIELDING

MS PART NO.	INSIDE DIA (NOMINAL)	A		B		BENDING RADIUS (INSIDE) MAX	WEIGHT MAX LB PER FT
		MAX	MIN	MAX	MIN		
MS25064-3	3/16	.373	.350	.188	.172	1.625	.140
MS25064-4	1/4	.435	.401	.250	.233	2.000	.180
MS25064-5	5/16	.513	.490	.328	.313	2.000	.205
MS25064-8	3/8	.560	.538	.375	.360	2.125	.242
MS25064-10	5/8	.833	.810	.625	.610	2.500	.406
MS25064-12	3/4	.958	.935	.750	.743	3.000	.457
MS25064-16	1	1.256	1.236	1.000	.985	3.875	.710
MS25064-18	1-1/8	1.411	1.387	1.156	1.141	5.125	.820
MS25064-22	1-3/8	1.688	1.658	1.375	1.360	5.625	.950

NOTES:

1. DIMENSIONS IN INCHES.
2. FOR CONDUIT ASSEMBLY SEE DRAWING MS25067.


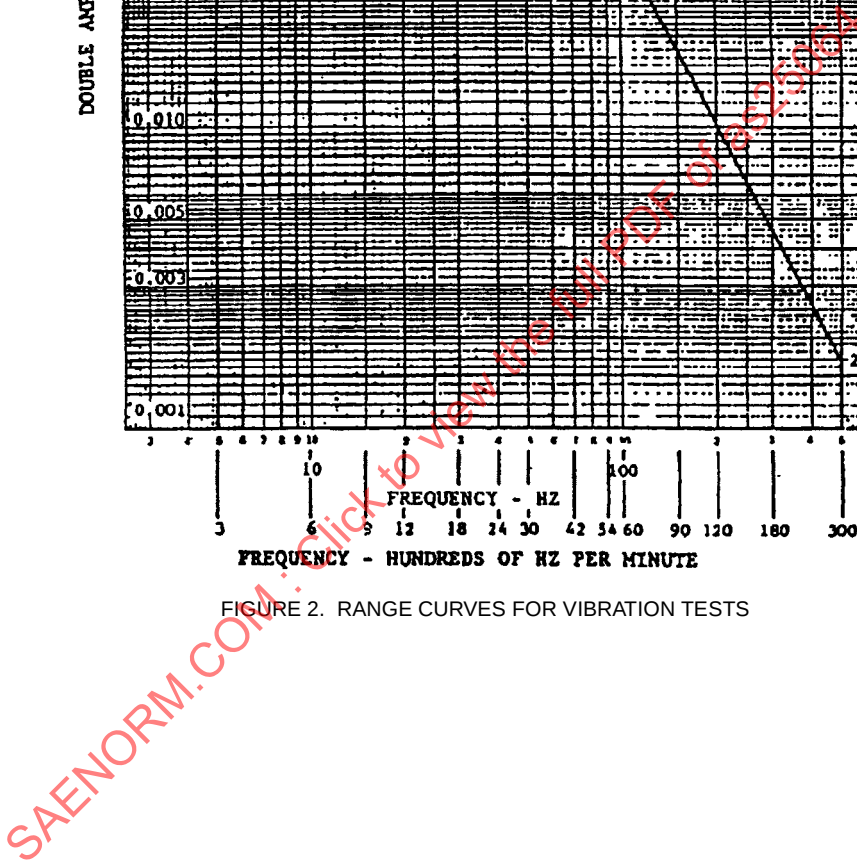


FIGURE 2. RANGE CURVES FOR VIBRATION TESTS

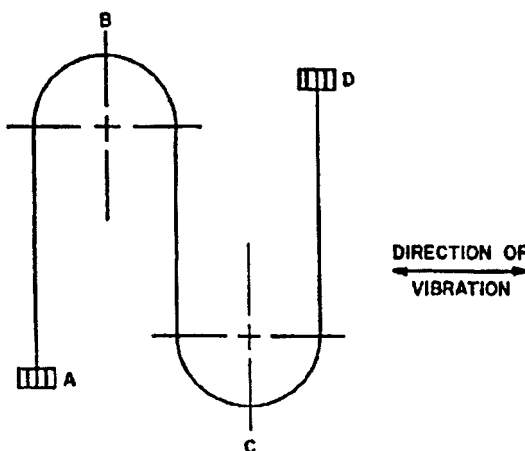

CONDUIT AND FERRULES CLAMPED TO VIBRATION
STAND AT POINTS A, B, C, AND D.

FIGURE 3. VIBRATION ENDURANCE TEST SETUP

APPLICABLE DOCUMENTS:

MIL-I-6051	ELECTROMAGNETIC COMPATIBILITY REQUIREMENTS, SYSTEMS
MS25065	FERRULE, FLEXIBLE CONDUIT, RADIO FREQUENCY SHIELDING
MS25066	NUT, FLEXIBLE CONDUIT, RADIO FREQUENCY SHIELDING
MS25067	CONDUIT ASSEMBLY, FLEXIBLE, RADIO FREQUENCY SHIELDING

REQUIREMENTS

1. IN ADDITION TO THE REQUIREMENTS OF A-A-52440 (*CID=COMMERCIAL ITEM DESCRIPTION), THE FOLLOWING REQUIREMENTS FORM A PART OF THIS MILITARY SPECIFICATION SHEET:
 - a. RADIATED INTERFERENCE. THE SHIELDING PROPERTIES TEST OF THE CONDUIT SHALL BE CONDUCTED IN ACCORDANCE WITH THE TEST REQUIREMENTS FOR RADIATED INTERFERENCE LIMITS OUTLINED IN MIL-I-6051. A 10-FOOT LENGTH OF CONDUIT, HAVING A MS25065 FERRULE AND A MS25066 NUT ASSEMBLED ON EACH END, SHALL BE INSERTED IN A SIMULATED ENGINE TEST SETUP. THE TEST SHALL CONSIST OF REPEATEDLY FIRING A SHIELDED SPARK PLUG WITH THE CONDUIT IN THE HIGH-TENSION SIDE OF THE SETUP. THE SPARK PLUG SHALL BE OPERATED IN A PRESSURE BOMB UNDER A SPARK PLUG SETTING AND BOMB PRESSURE APPROXIMATING THAT NORMALLY ENCOUNTERED IN AN ENGINE. THE MAGNETO USED SHALL BE A BENDIX-SCINTILLA MODEL NO. DF18LN, OR EQUAL, AND SHALL BE SUITABLY SHIELDED. THE CONDUIT SHALL BE CAPABLE OF SATISFACTORILY LIMITING ANY RADIATED INTERFERENCE TO WITHIN THE LIMITS SPECIFIED.
 - b. VIBRATION ENDURANCE. THE VIBRATION APPARATUS SHALL CONSIST OF A SUITABLE DEVICE FOR MOUNTING AND VIBRATING THE CONDUIT ASSEMBLY THROUGH THE FOLLOWING RANGES:
 - (a) 0.100-INCH DOUBLE AMPLITUDE (TOTAL EXCURSION) FROM 5 TO 10 HZ.
 - (b) 0.060-INCH DOUBLE AMPLITUDE FROM 10 TO 60 HZ.
 - (c) $\pm 11g$ VIBRATORY ACCELERATION FROM 60 TO 75 HZ.
 - (d) $\pm 15g$ VIBRATORY ACCELERATION FROM 75 TO 100 HZ.
 - (e) $\pm 20g$ VIBRATORY ACCELERATION FROM 100 TO 500 HZ.