

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
B

AS28772


FEDERAL SUPPLY CLASS
5330

RATIONALE

THIS FIVE YEAR REVIEW UPDATES THE INSPECTION CRITERIA AND INCLUDES EDITORIAL CORRECTIONS.


FOREWORD

THIS STANDARD ESTABLISHES THE DIMENSIONAL AND VISUAL QUALITY REQUIREMENTS, LOT REQUIREMENTS AND PACKAGING AND LABELING REQUIREMENTS FOR D-RINGS MOLDED FROM MIL-P-25732 RUBBER. IT SHALL BE USED FOR PROCUREMENT PURPOSES.

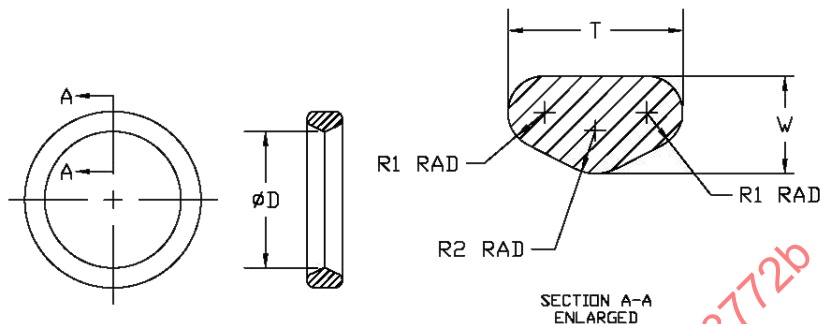

NOTE: DIMENSIONS AND TOLERANCING PER ASME Y14.5-2009

FIGURE 1 - D-RING

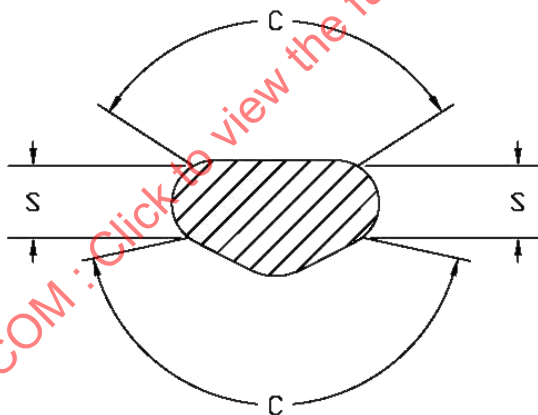


KEY:
C = CRITICAL SURFACES
S = SECONDARY SURFACES
(APPROXIMATE LOCATIONS SHOWN)

FIGURE 2 - SURFACES

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS28772B>

THIRD ANGLE PROJECTION



CUSTODIAN: A-6/A-6C2



AEROSPACE STANDARD

(R) "D" RING SEAL FOR SHOCK STRUTS MOLDED
FROM AMS-P-25732 MATERIAL

AS28772
SHEET 1 OF 4

REV.
B

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NUMBER	ID				T		R RAD		S RAD		W		APPROX MASS	
	INCH		(MM)		INCH ±.005	(MM) ±0.127	INCH ±.010	(MM) ±0.254	INCH ±.010	(MM) ±0.254	INCH ±.005	(MM) ±0.127	LB/100	KG/100
MS28772-335	2.725	±.015	69.215	±0.381	.375	9.525	.093	2.362	.078	1.981	.210	5.334	1.670	0.757
MS28772-336	2.850		72.390										1.741	0.790
MS28772-337	2.975		75.565										1.812	0.822
MS28772-338	3.100		78.740										1.883	0.855
MS28772-339	3.225		81.915										1.954	0.887
MS28772-340	3.350		85.090										2.025	0.918
MS28772-341	3.475		88.265										2.097	0.951
MS28772-342	3.600		91.440										2.167	0.983
MS28772-343	3.725		94.615										2.239	1.016
MS28772-344	3.850		97.790										2.310	1.048
MS28772-345	3.975		100.965										2.381	1.080
MS28772-346	4.100		104.140										2.452	1.112
MS28772-347	4.225		107.315										2.523	1.145
MS28772-348	4.350		110.490										2.594	1.176
MS28772-349	4.475		113.665										2.665	1.209

PART NUMBER	ID		T		R RAD		S RAD		W		APPROX MASS											
	INCH	(MM)	INCH ±.005	(MM) ±0.127	INCH ±.010	(MM) ±0.254	INCH ±.010	(MM) ±0.254	INCH ±.006	(MM) ±0.152	LB/100	KG/100										
MS28772-425	4.475	113.665	±0.381	.531	13.487	.125	3.175	.105	2.667	.275	6.985	4.634	2.102									
MS28772-426	4.600	116.840										4.757	2.157									
MS28772-427	4.725	120.015										4.878	2.213									
MS28772-428	4.850	123.190										5.000	2.268									
MS28772-429	4.975	126.365										5.122	2.323									
MS28772-430	5.100	129.540	±0.584	.531	13.487	.125	3.175	.105	2.667	.275	6.985	5.244	2.379									
MS28772-431	5.225	132.715										5.366	2.433									
MS28772-432	5.350	135.890										5.488	2.489									
MS28772-433	5.475	139.065										5.609	2.545									
MS28772-434	5.600	142.240										5.731	2.599									
MS28772-435	5.725	145.415										5.853	2.655									
MS28772-436	5.850	148.590										5.975	2.722									
MS28772-437	5.975	151.765										6.097	2.765									
MS28772-438	6.225	158.115										6.341	2.877									
MS28772-439	6.475	164.465										6.585	2.987									
MS28772-440	6.725	170.815										6.829	3.097									
MS28772-441	6.975	177.165										7.073	3.209									
MS28772-442	7.225	183.515										±0.762	.531	13.487	.125	3.175	.105	2.667	.275	6.985	7.317	3.319
MS28772-443	7.475	189.865																			7.561	3.429
MS28772-444	7.725	196.215																			7.805	3.540
MS28772-445	7.975	201.295	8.048	3.651																		
MS28772-446	8.475	215.265	8.536	3.872																		
MS28772-447	8.975	227.965	9.025	4.094																		
MS28772-448	9.475	240.665	9.512	4.315																		
MS28772-449	9.975	253.365	10.000	4.536																		
MS28772-450	10.475	266.065	10.487	4.757																		
MS28772-451	10.975	278.765	10.975	4.978																		
MS28772-452	11.475	291.465	11.464	5.200																		
MS28772-453	11.975	304.165	11.951	5.422																		
MS28772-454	12.475	316.865	12.439	5.642																		
MS28772-455	12.975	329.565	12.927	5.864																		
MS28772-456	13.475	342.265	13.414	6.084																		
MS28772-457	13.975	354.965	13.902	6.306																		
MS28772-458	14.475	367.665	14.389	6.526																		
MS28772-459	14.975	380.365	14.878	6.743																		
MS28772-460	15.475	393.065	15.366	6.970																		

APPLICATION:

THESE D-RINGS TYPICALLY ARE USED AS ROD SEALS IN SHOCK STRUTS. THEY SHOULD NOT BE USED IN CONJUNCTION WITH ANY HYDRAULIC FLUID OTHER THAN THAT CONFORMING TO MIL-PRF-5606. THESE D-RINGS HAVE A SERVICE TEMPERATURE RANGE OF -65 TO +160 °F (-54 TO +71 °C).

	AEROSPACE STANDARD	AS28772 SHEET 2 OF 4	REV. B
	(R) "D" RING SEAL FOR SHOCK STRUTS MOLDED FROM AMS-P-25732 MATERIAL		

APPLICABLE REFERENCES:

SAE PUBLICATIONS

AVAILABLE FROM SAE INTERNATIONAL, 400 COMMONWEALTH DRIVE, WARRENDALE, PA 15096-0001, TEL: 877-606-7323 (INSIDE USA AND CANADA) OR +1 724-776-4970 (OUTSIDE USA), www.sae.org.

- AMS2817 PACKAGING AND IDENTIFICATION, PREFORMED PACKINGS
- ARP5316 STORAGE OF ELASTOMER SEALS AND SEAL ASSEMBLIES WHICH INCLUDE AN ELASTOMER ELEMENT PRIOR TO HARDWARE ASSEMBLY
- AS4716 GLAND DESIGN, O-RING AND OTHER ELASTOMERIC SEALS

U.S. GOVERNMENT PUBLICATIONS

COPIES OF THESE DOCUMENTS ARE AVAILABLE ONLINE AT <http://quicksearch.dla.mil>.

- MIL-G-5514 GLAND DESIGN, PACKINGS, HYDRAULIC, GENERAL REQUIREMENTS FOR (INACTIVE FOR NEW DESIGNS)
- MIL-P-25732 PACKING, PREFORMED, PETROLEUM FLUID RESISTANT, LIMITED SERVICE AT 275 DEG. F (135 DEG. C)
- MIL-PRF-5606 HYDRAULIC FLUID, PETROLEUM BASE; AIRCRAFT, MISSILE, AND ORDNANCE.

ASQ PUBLICATIONS

AVAILABLE FROM AMERICAN SOCIETY FOR QUALITY, 600 NORTH PLANKINTON AVENUE, MILWAUKEE, WI 53203, TEL: 800-248-1946 (UNITED STATES OR CANADA)), 001-800-514-1564 (MEXICO) OR +1-414-272-8575 (ALL OTHER LOCATIONS), www.asq.org.

- ANSI/ASQ Z1.4 SAMPLING PROCEDURES AND TABLES FOR INSPECTION BY ATTRIBUTES

ASME AND ISO PUBLICATIONS

AVAILABLE FROM AMERICAN NATIONAL STANDARDS INSTITUTE, 25 WEST 43RD STREET, 4TH FLOOR, NEW YORK, NY 10036, TEL: 212-642-4900, www.ansi.org.

- ASME Y14.5-2009 DIMENSIONING AND TOLERANCING
- ISO 3601-1 FLUID POWER SYSTEMS – O-RINGS – PART 1: INSIDE DIAMETERS, CROSS-SECTIONS, TOLERANCES AND DESIGNATION CODES
- ISO 3601-3 FLUID POWER SYSTEMS – O-RINGS – PART 3: QUALITY ACCEPTANCE CRITERIA

REQUIREMENTS:

1. MATERIAL: THE MATERIAL SHALL BE IN ACCORDANCE WITH MIL-P-25732.
2. DIMENSIONAL AND VISUAL INSPECTION: PRIOR TO INSPECTION, MOLD FLASH SHALL BE REMOVED FROM THE D-RINGS IN SUCH A MANNER THAT THEY CONFORM TO THE REQUIREMENTS SPECIFIED HEREIN. FOR END OF PROCESS INSPECTION, EACH INDIVIDUAL O-RING (100%) SHALL BE VISUALLY INSPECTED AT 1X MAGNIFICATION FOR MOLD FLASH, BACKRIND, PARTING LINE PROJECTION, NON-FILLS, FLOW LINES AND OTHER SIGNIFICANT DEFECTS. THE ENTIRE D-RING SURFACE SHALL BE INSPECTED.
3. FOR FINAL INSPECTION, THE SAMPLE SIZE SHALL BE IN ACCORDANCE WITH ANSI/ASQ Z1.4 SINGLE SAMPLING PLAN INSPECTION LEVEL II WITH AN AQL 1.0 EXCEPT THAT THE ACCEPTANCE NUMBER SHALL BE ZERO.

THE SAMPLE UNIT SHALL BE ONE D-RING. INSPECTION FOR CRITICAL SURFACES (C) PER FIGURE 2 SHALL BE ACCORDING TO ISO 3601-3, GRADE S REQUIREMENTS AND INSPECTION FOR SECONDARY SURFACES (S) PER FIGURE 2 SHALL BE IN ACCORDANCE TO ISO 3601-3 GRADE N UNDER 2X MAGNIFICATION. IN CASE OF DISAGREEMENT, THE VISUAL INSPECTION AT 2X MAGNIFICATION SHALL GOVERN. THE ENTIRE D-RING SURFACE SHALL BE MANUALLY INSPECTED. THE PROCEDURES OUTLINED IN ANNEX B OF ISO 3601-1 SHALL BE FOLLOWED FOR DIMENSIONAL INSPECTION. IF THE PURCHASER REQUIRES A DIFFERENT SAMPLING PLAN OR VISUAL INSPECTION CRITERIA, MANUFACTURER SHALL BE INFORMED PRIOR TO TIME OF ORDER.

NOTE: INSPECTION CRITERIA SHOULD BE PER THE REQUIREMENTS OF >.248 INCH (>6.300 MM) CROSS SECTION.

	AEROSPACE STANDARD		AS28772 SHEET 3 OF 4	REV. B
	(R) "D" RING SEAL FOR SHOCK STRUTS MOLDED FROM AMS-P-25732 MATERIAL			