

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."


SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS3116

FEDERAL SUPPLY CLASS
5306

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

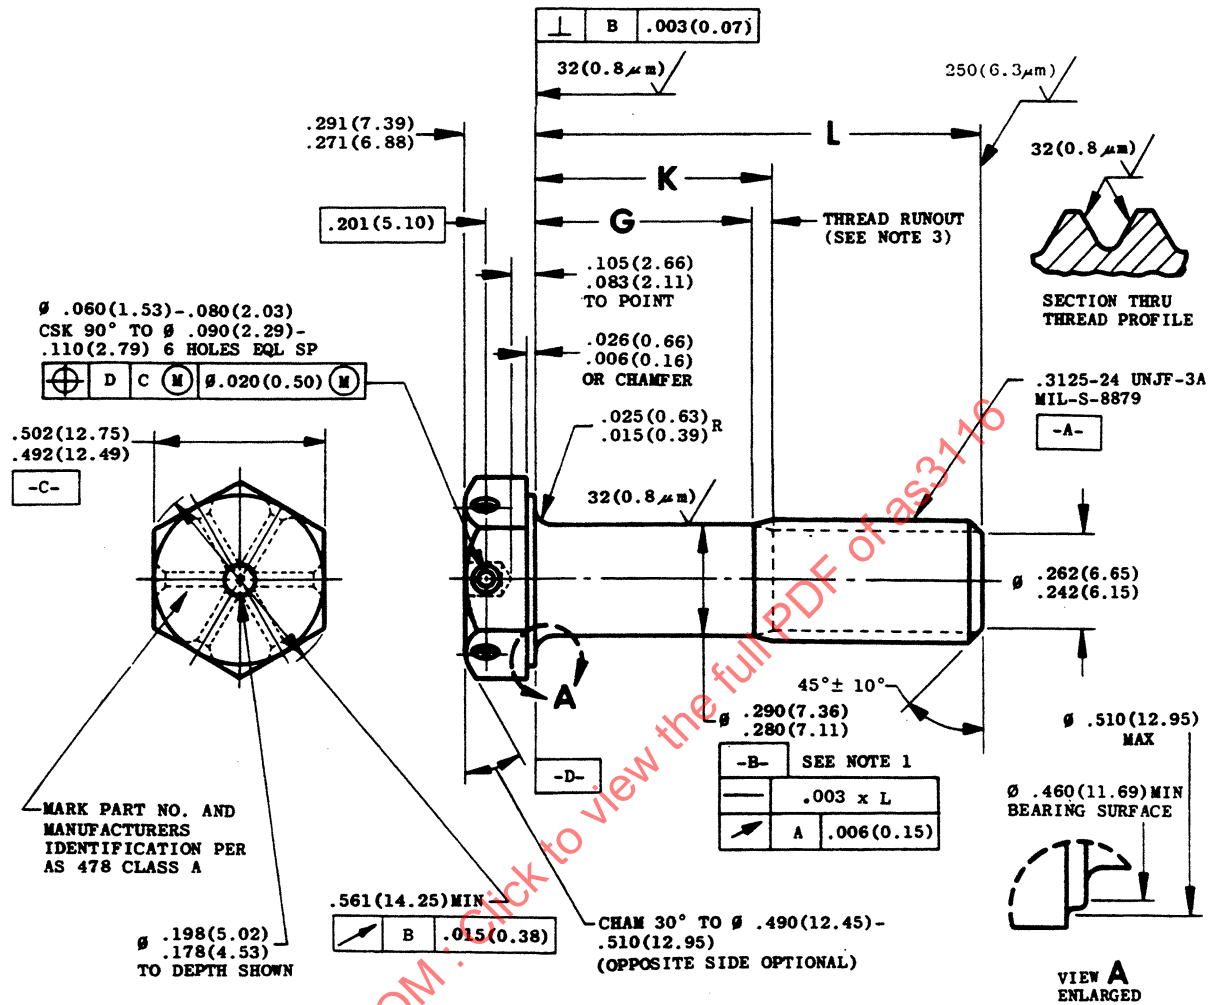

1. FOR PART NUMBERS AS3116-13 THRU AS3116-17 THE THREAD PD SHALL REPLACE DATUM B.
2. MATERIAL: CORROSION RESISTANT STEEL AMS 5731.
3. MANUFACTURING SPECIFICATION: AMS 7477.
4. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
5. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES, (3.2 MICROMETRES) EXCEPT UPSET HEAD.
6. BREAK SHARP EDGES .003-.015 (0.08-0.38) UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS IN INCHES (MILLIMETRES). METRIC CONVERSIONS ARE INTERNATIONAL SYSTEM UNITS (SI). UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGULAR DIMENSIONS $\pm 5^\circ$.
8. DIMENSIONS AND TOLERANCING: ANSI Y14.5-1973.
9. DO NOT USE UNASSIGNED PART NUMBERS.

PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

BOLT, MACHINE - HEXAGON HEAD, DRILLED 6 HOLES,
PD SHANK, CRES AMS 5731, .3125-24 UNJF-3A

AS3116
SHEET 1 OF 2