

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS31351™

FEDERAL SUPPLY CLASS
5935

RATIONALE

AS31351A HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF SAE AS81703.


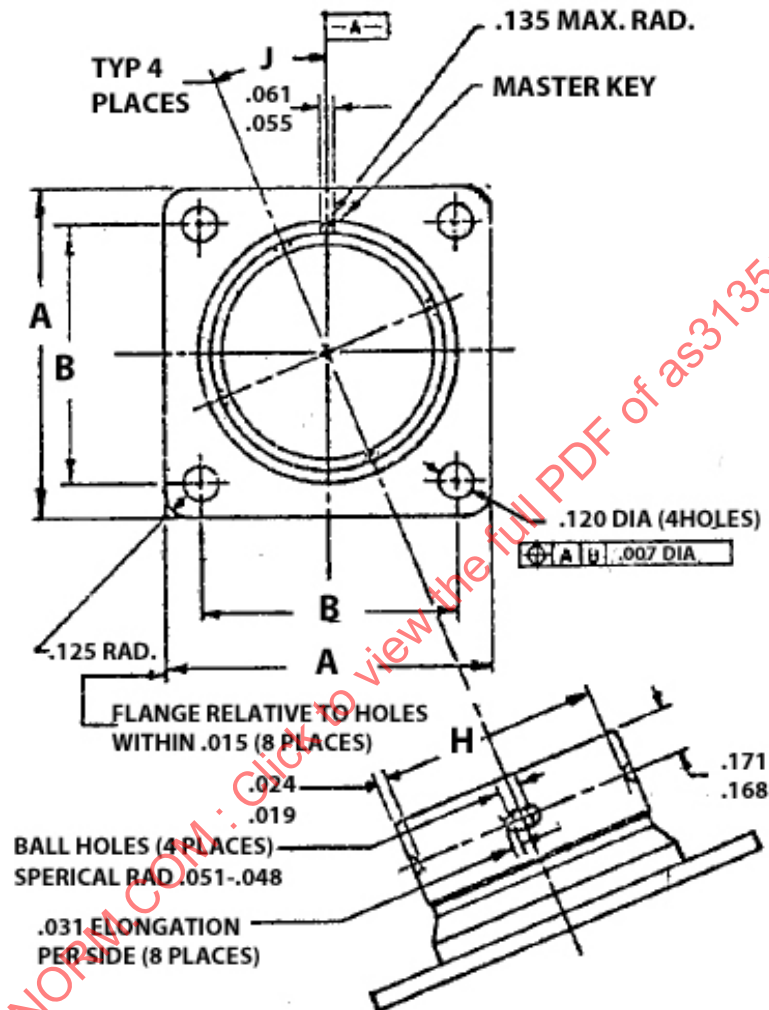


FIGURE 1 – CONNECTOR CONFIGURATIONS AND DIMENSIONS

For more information on this standard, visit
<https://www.sae.org/standards/content/AS31351A/>

THIRD ANGLE PROJECTION



CUSTODIAN:

PROCUREMENT SPECIFICATION: AS81703



AEROSPACE STANDARD

(R) CONNECTOR, RECEPTACLE, ELECTRIC, DUMMY
STOWAGE, WALL MOUNTING FLANGE, PUSH-PULL,
COUPLING (SERIES 1 AND 2 CONNECTORS)

AS31351™
SHEET 1 OF 3

REV.
A

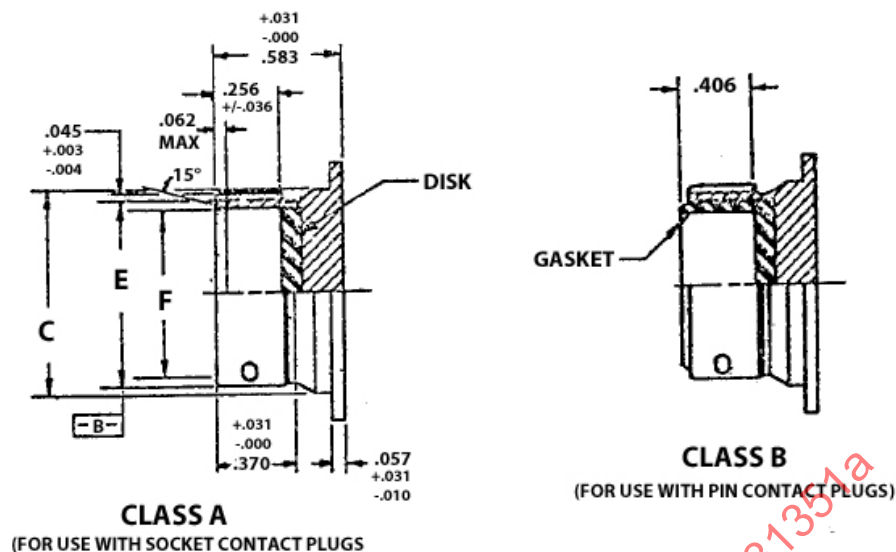


FIGURE 2 – CONNECTOR CONFIGURATIONS AND DIMENSIONS (CONTINUED)

TABLE 1 – FIGURE 1 AND 2 DIMENSIONS

SHELL SIZE DASH NO.	A MAX LENGTH SIDE	B BSC MOUNTING CENTER	C MAX DIA FRONT	E +.006/-.004 SHELL OUTSIDE DIA	F +.003/-.007 SHELL INSIDE DIA	H +.002/-.005 BALL HOLE SPACING	J BALL HOLE LOCATION
-3	.896	.625	.578	.435	.364	.396	30°
-7	1.021	.719	.691	.570	.480	.531	22.5°
-12	1.114	.812	.828	.704	.621	.666	
-19	1.208	.906	.953	.843	.760	.804	
-27	1.302	.968	1.136	.998	.915	.959	
-37	1.458	1.187	1.266	1.120	1.037	1.081	

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF AS81703.

1. DESIGN:

CONNECTORS AND ACCESSORIES SHALL BE DESIGNED IN ACCORDANCE WITH FIGURES 1 AND 2 AND TABLE 1. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 0.016 INCHES. ANGULAR TOLERANCES ARE ± 0.5 DEGREES. DIMENSIONS LOCATING TRUE POSITION ARE BASIC. TRUE POSITION TOLERANCES SPECIFIED ARE IN ACCORDANCE WITH ASME-Y14.5 -DIMENSIONING AND TOLERANCING.

2. MATERIALS:

SHELL: ALUMINUM ALLOY CONFORMING TO MIL-DTL-26482.

DISK: CLOSED CELL NEOPRENE SPONGE PER ASTM-D1056.

GASKET: SYNTHETIC RUBBER WITH 55 ± 10 DUROMETER OR SUITABLE MATERIAL THAT MEETS THE REQUIREMENTS OF AS81703.

	AEROSPACE STANDARD	AS31351™ SHEET 2 OF 3	REV. A
	(R) CONNECTOR, RECEPTACLE, ELECTRIC, DUMMY STOWAGE, WALL MOUNTING FLANGE, PUSH-PULL, COUPLING (SERIES 1 AND 2 CONNECTORS)		