

REV.
B

AS3241

FEDERAL SUPPLY CLASS
5306

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.


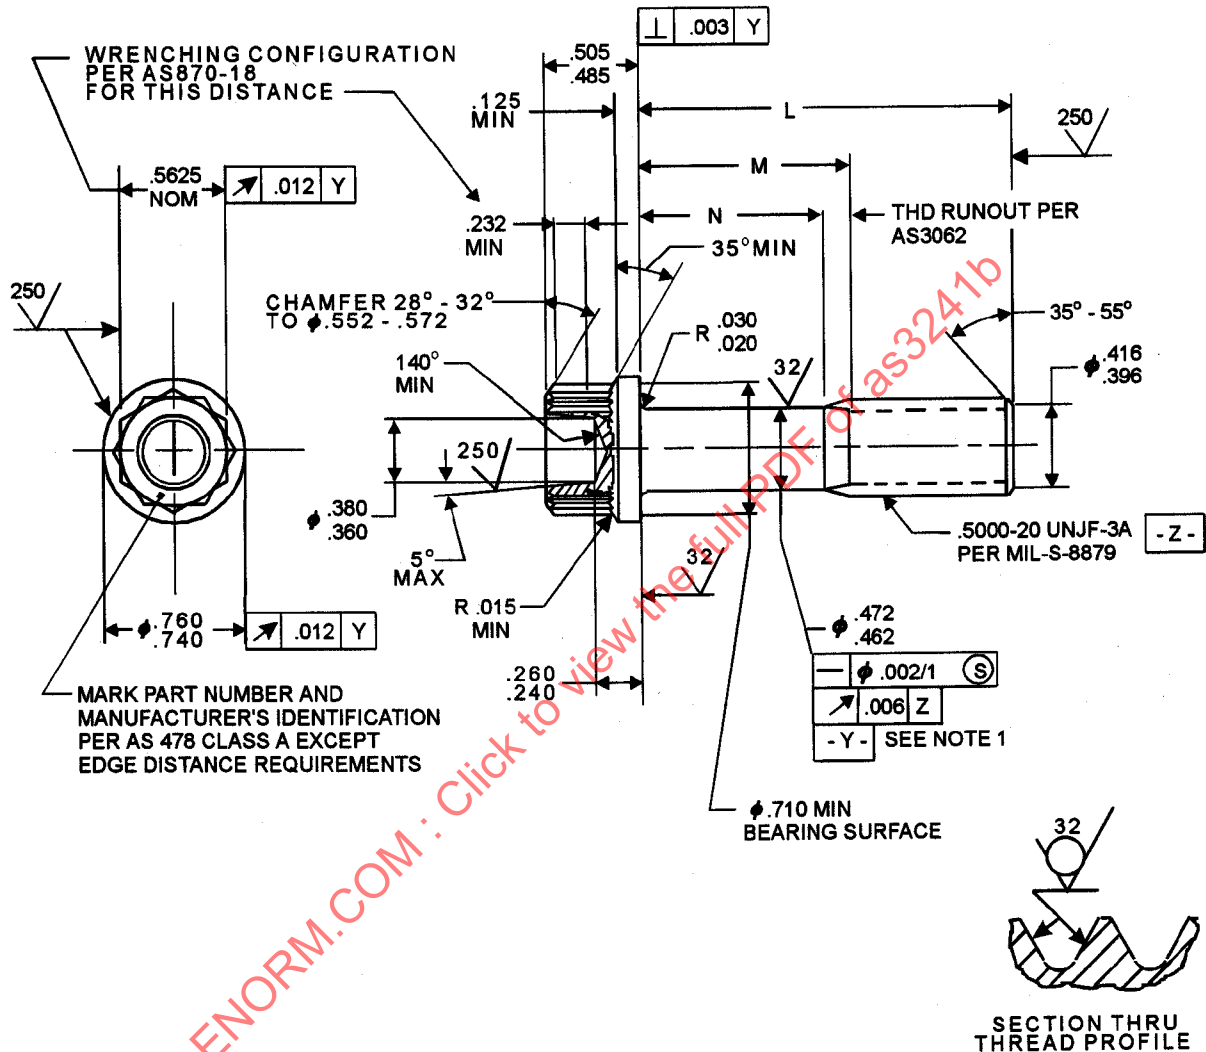


FIGURE 1 - BOLT

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD
(R) BOLT, MACHINE - DOUBLE HEXAGON EXTENDED
WASHER HEAD, PD SHANK, CRES,
UNS N07718, 185 KSI MIN, .5000-20 UNJF-3A

AS3241
SHEET 1 OF 3

**REV.
B**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: CustomerService@sae.org SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1980-07 REVISED 2002-06 REAFFIRMED 2007-06

REV.
B

AS3241

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	N MIN	M MAX	APPROX. MASS LB/100
AS3241-03	.740 - .760	.030	.125	7.33
AS3241-04	.802 - .822	.030	.125	7.65
AS3241-05	.865 - .885	.030	.125	7.97
AS3241-06	.928 - .948	.030	.125	8.29
AS3241-07	.990 - 1.010	.030	.125	8.61
AS3241-08	1.052 - 1.072	.030	.125	8.93
AS3241-09	1.115 - 1.135	.030	.125	9.25
AS3241-10	1.178 - 1.198	.030	.125	9.56
AS3241-11	1.240 - 1.260	.030	.125	9.88
AS3241-12	1.302 - 1.322	.030	.125	10.20
AS3241-13	1.365 - 1.385	.030	.125	10.53
AS3241-14	1.428 - 1.448	.030	.188	10.84
AS3241-15	1.490 - 1.510	.090	.250	11.16
AS3241-16	1.552 - 1.572	.152	.312	11.48
AS3241-17	1.615 - 1.635	.215	.375	11.80
AS3241-18	1.678 - 1.698	.278	.438	12.11
AS3241-19	1.740 - 1.760	.340	.500	12.44
AS3241-20	1.802 - 1.822	.402	.562	12.77
AS3241-21	1.865 - 1.885	.465	.625	13.07
AS3241-22	1.928 - 1.948	.528	.688	13.39
AS3241-23	1.990 - 2.010	.590	.750	13.71
AS3241-24	2.115 - 2.135	.715	.875	14.35
AS3241-25	2.240 - 2.260	.840	1.000	14.99
AS3241-26	2.365 - 2.385	.965	1.125	15.62
AS3241-27	2.490 - 2.510	1.090	1.250	16.27
AS3241-28	2.615 - 2.635	1.215	1.375	16.90
AS3241-29	2.740 - 2.760	1.340	1.500	17.54

PART NO.	L	N MIN	M MAX	APPROX. MASS LB/100
AS3241-30	2.865 - 2.885	1.465	1.625	18.18
AS3241-31	2.990 - 3.010	1.590	1.750	18.81
AS3241-32	3.115 - 3.135	1.715	1.875	19.45
AS3241-33	3.240 - 3.260	1.840	2.000	20.09
AS3241-34	3.365 - 3.385	1.965	2.125	20.73
AS3241-35	3.490 - 3.510	2.090	2.250	21.35
AS3241-36	3.615 - 3.635	2.215	2.375	22.01
AS3241-37	3.740 - 3.760	2.340	2.500	22.64
AS3241-38	3.865 - 3.885	2.465	2.625	23.28
AS3241-39	3.990 - 4.010	2.590	2.750	23.92
AS3241-40	4.115 - 4.135	2.715	2.875	24.56
AS3241-41	4.240 - 4.260	2.840	3.000	25.19
AS3241-42	4.365 - 4.385	2.965	3.125	25.83
AS3241-43	4.490 - 4.510	3.090	3.250	26.47
AS3241-44	4.615 - 4.635	3.215	3.375	27.10
AS3241-45	4.740 - 4.760	3.340	3.500	27.75
AS3241-46	4.865 - 4.885	3.465	3.625	28.38
AS3241-47	4.990 - 5.010	3.590	3.750	29.02
AS3241-48	5.115 - 5.135	3.715	3.875	29.66
AS3241-49	5.240 - 5.260	3.840	4.000	30.60
AS3241-50	5.365 - 5.385	3.965	4.125	30.93
AS3241-51	5.490 - 5.510	4.090	4.250	31.58
AS3241-52	5.615 - 5.635	4.215	4.375	32.22
AS3241-53	5.740 - 5.760	4.340	4.500	32.85
AS3241-54	5.865 - 5.885	4.465	4.625	33.50
AS3241-55	5.990 - 6.010	4.590	4.750	34.14