


AS3268

SHEET 1 OF 2

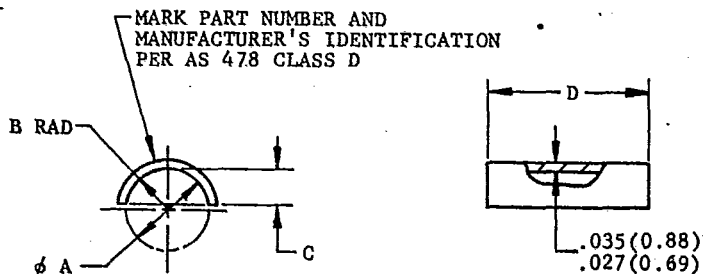

A NOM TUBE OD		B		C	
IN	(mm)	IN	(mm)	IN	(mm)
.188	4.78	.097-.107	2.46-2.72	.067-.087	1.70-2.21
.250	6.35	.127-.138	3.23-3.51	.098-.118	2.49-3.00
.312	7.92	.159-.169	4.04-4.29	.129-.149	3.28-3.79
.375	9.52	.190-.200	4.83-5.08	.160-.180	4.06-4.57
.438	11.13	.222-.232	5.64-5.89	.192-.212	4.88-5.38
.500	12.70	.253-.263	6.43-6.68	.223-.243	5.66-6.17
.562	14.27	.284-.294	7.21-7.47	.254-.274	6.45-6.96
.625	15.88	.315-.325	8.00-8.25	.285-.305	7.24-7.75
.656	16.66	.331-.341	8.41-8.66	.301-.321	7.65-8.15
.686	17.48	.345-.355	8.76-9.02	.315-.335	8.00-8.51
.750	19.05	.378-.388	9.60-9.86	.348-.368	8.84-9.35
.781	19.84	.393-.403	9.98-10.24	.363-.383	9.22-9.73
.812	20.62	.409-.419	10.39-10.64	.379-.399	9.63-10.13
.875	22.23	.440-.450	11.18-11.43	.410-.430	10.41-10.92
.938	23.83	.472-.482	11.99-12.24	.442-.462	11.22-11.74
1.000	25.40	.503-.513	12.78-13.03	.473-.493	12.01-12.52
1.031	26.19	.518-.528	13.16-13.41	.488-.508	12.40-12.90
1.062	26.97	.534-.544	13.56-13.82	.504-.524	12.80-13.31
1.094	27.79	.550-.560	13.97-14.22	.520-.540	13.21-13.72
1.125	28.58	.565-.575	14.35-14.61	.535-.555	13.59-14.10
1.188	30.18	.597-.607	15.16-15.42	.567-.587	14.40-14.91
1.250	31.75	.628-.638	15.95-16.21	.598-.618	15.19-15.70
1.312	33.32	.659-.669	16.74-16.99	.629-.649	15.98-16.48
1.344	34.14	.675-.685	17.15-17.40	.645-.665	16.38-16.89
1.375	34.92	.690-.700	17.53-17.78	.660-.680	16.76-17.27
1.438	36.52	.722-.732	18.34-18.59	.692-.712	17.58-18.08
1.500	38.10	.755-.765	19.18-19.43	.725-.745	18.42-18.92
1.546	39.27	.778-.788	19.76-20.01	.748-.768	19.00-19.51
1.625	41.28	.818-.828	20.78-21.03	.788-.808	20.02-20.52
1.750	44.45	.880-.890	22.35-22.61	.850-.870	21.59-22.10
1.875	47.62	.943-.953	23.95-24.21	.913-.933	23.19-23.70
2.000	50.80	1.005-1.015	25.53-25.78	.985-1.005	25.02-25.53
2.062	52.38	1.036-1.046	26.31-26.56	1.006-1.026	25.55-26.06

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5510.
2. FINISH: ABRASIVE FINISH (IF USED) BY SILICON CARBIDE OR WET NOVACULITE ONLY.
3. EDGES NEED NOT BE SQUARE AFTER FORMING. THINNING OF MATERIAL DUE TO FORMING PERMISSIBLE.
4. BREAK SHARP EDGES .003-.015 (0.08-0.38).
5. DIMENSIONS AND TOLERANCING: ANSI Y14.5-1973
6. DIMENSIONS IN INCHES (MILLIMETRES), METRIC CONVERSION ARE INTERNATIONAL SYSTEM UNITS (SI).
7. DO NOT USE UNASSIGNED PART NUMBERS.

PREPARED BY SAE COMMITTEE E25, ENGINE & PROPELLER UTILITY PARTS.

Society of Automotive Engineers, Inc.
400 COMMONWEALTH DRIVE, WARRENDALE, PA. 15098

AERO

Distributed under license from the IHS Archive

SLEEVE HALF - REINFORCING, TUBE

AS3268

SHEET 1 OF 2

Issued 9-1-80 Revised

COPYRIGHT 1980 SAE

SAE Technical and rules provide that: "All technical reports, including standards approved and practice recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report. In formulating and approving technical reports, the Board and its Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against infringement of patents."