

AS3273

FEDERAL SUPPLY CLASS
5310


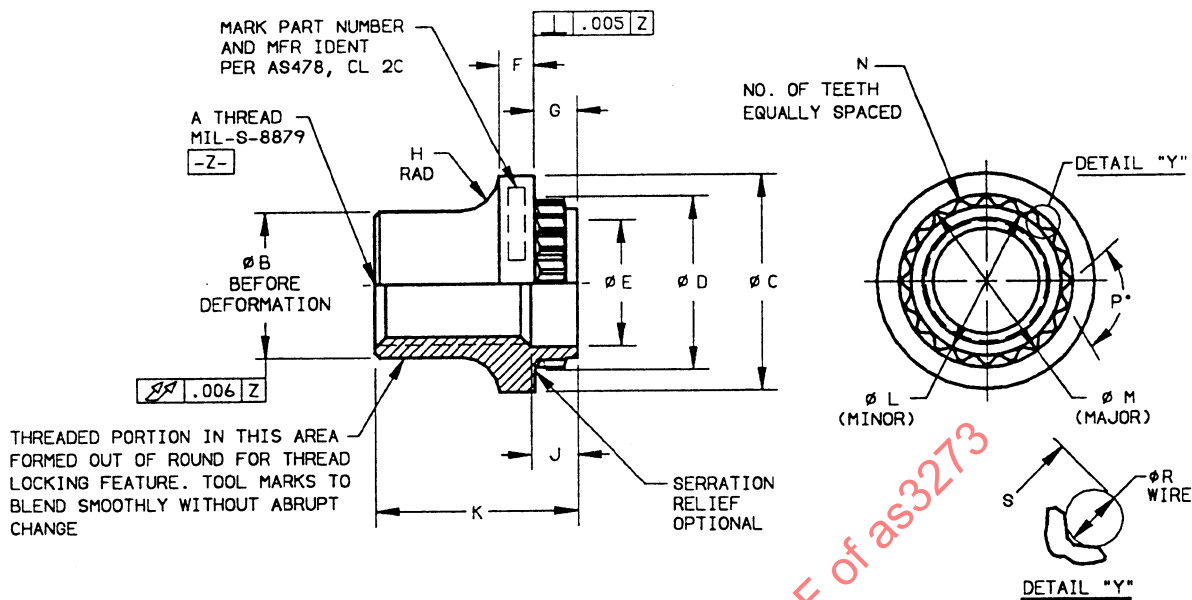


FIGURE 1

TABLE 1

THREAD SIZE	TORQUE-OUT
	1bf·in MIN
.1900-32	120
.2500-28	375
.3125-24	600
.3750-24	800

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

NUT - SELF-LOCKING, CLINCH,
SERRATED SHANK, 1200 °F, SILVER PLATED,
UNS S66286, UNJ THREAD

AS3273
SHEET 1 OF 2

Copyright 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1992-10 REAFFIRMED 2004-07

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.