

REV.
A

SAE AS33411

FEDERAL SUPPLY CLASS
5975

RATIONALE

REDRAWN TO MAKE THE DRAWINGS AND CHARTS MORE LEGIBLE.

NOTICE

THE REQUIREMENTS FOR PROCURING THE MOUNTING BRACKETS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF SAE AS23190.

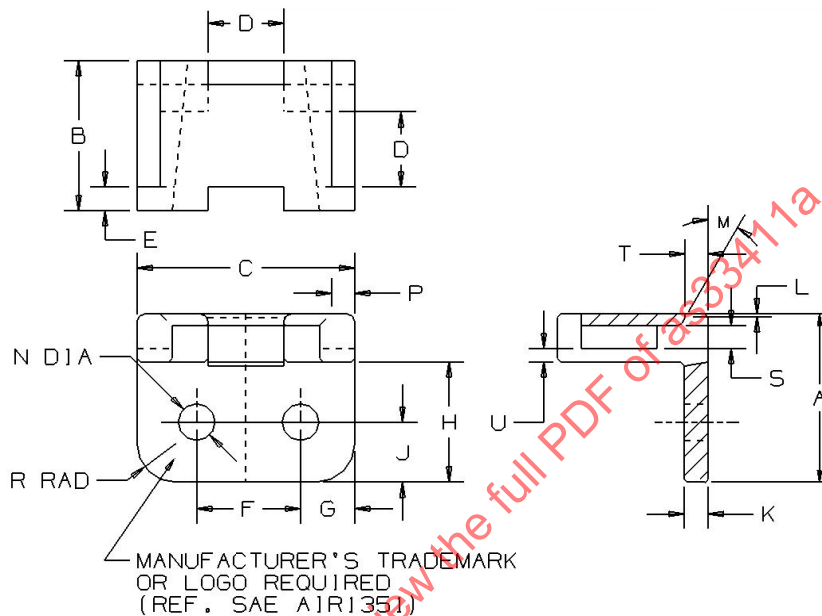



FIGURE 1 - MS3341 MOUNTING BRACKET CONFIGURATION

TABLE 1 - FIGURE 1 DIMENSIONS

DASH NO.	A ± .030	B ± .030	C ± .030	D MIN	E ± .010	F ± .010	G ± .020	H ± .015	J ± .015	K ± .015	L ± .010	M ± 3°	N DIA	P MIN
-1	1.000	.750	1.000	.315	.100	.500	.250	.750	.350	.180	.031	30°	.135 — .115	.093
-2	.437	.390	.562	.195	.062	.281	.140	.312	.156	.062	.020	—	.100 — .090	.060

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS33411A>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8/AE-8C2

PROCUREMENT SPECIFICATION: MIL-S-23190

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) BRACKET, MOUNTING,
PLASTIC FOR USE WITH
MS3367 PLASTIC TIEDOWN STRAPS

SAE AS33411
SHEET 1 OF 2

REV.
A