

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS33515

FEDERAL SUPPLY CLASS
4730

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS33515J AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS33515J. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of AS33515

THIRD ANGLE PROJECTION



PREPARED BY COMMITTEE G-3

PROCUREMENT SPECIFICATION: NONE

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING END, STANDARD DIMENSIONS
FOR BULKHEAD
FLARELESS TUBE CONNECTIONS


AS33515
SHEET 1 OF 3

ISSUED 1998-08 REAFFIRMED 2007-01

Copyright 2007 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: CustomerService@sae.org SAE WEB ADDRESS: <http://www.sae.org>

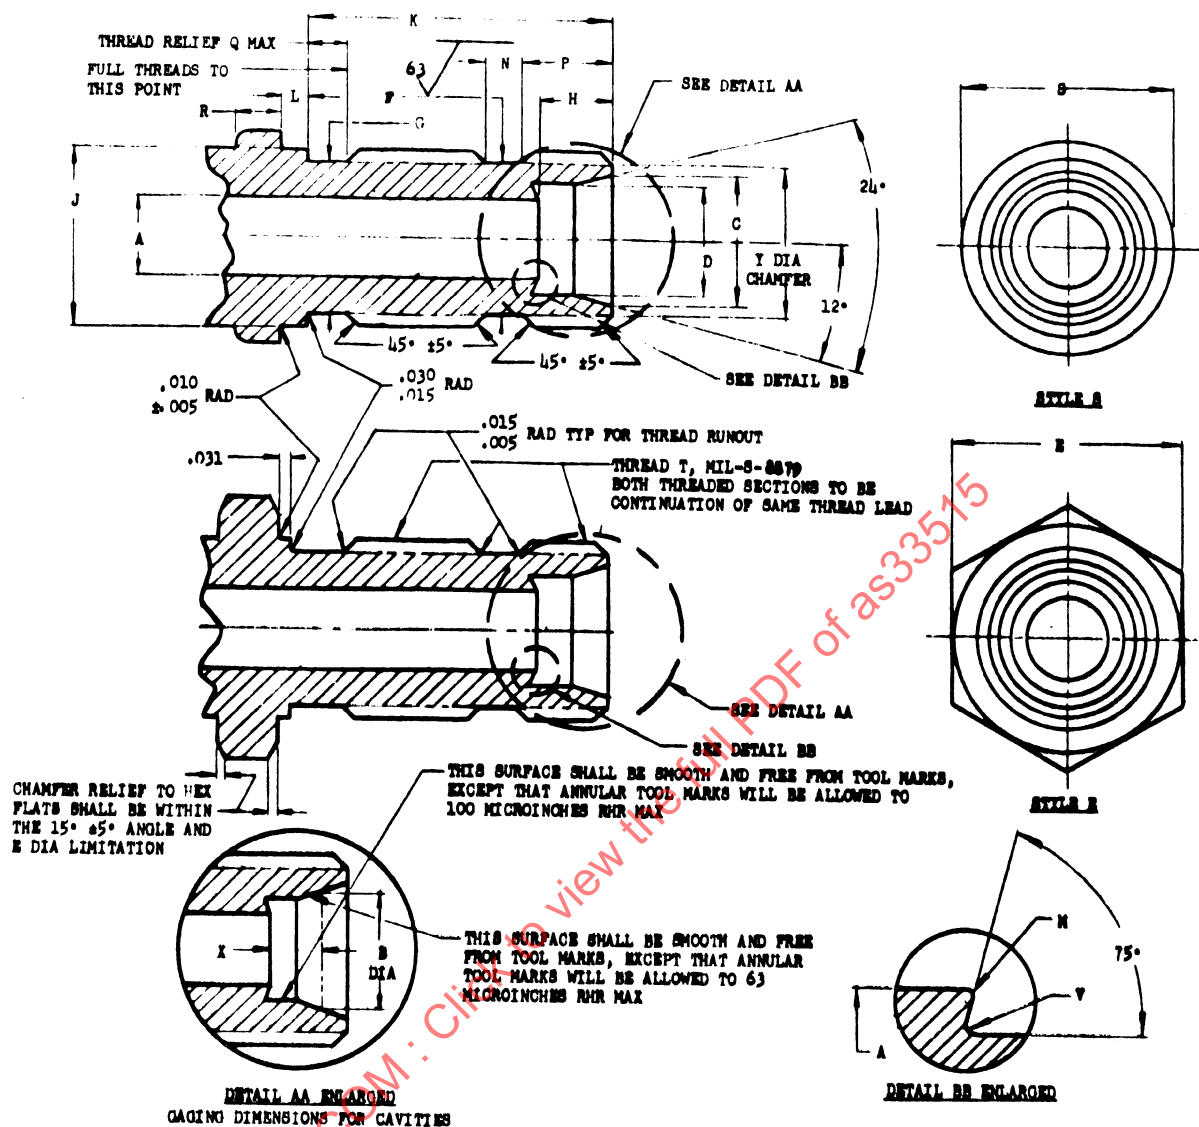

1. CONCENTRICITY—D, C, AND T (PITCH DIA) SHALL BE CONCENTRIC TO EACH OTHER WITHIN .008 TOTAL INDICATOR READING.
F AND T (PITCH DIA) SHALL BE CONCENTRIC TO EACH OTHER WITHIN .005 TOTAL INDICATOR READING.
2. THREAD AND FACE OF HEX SHALL BE SQUARE WITHIN W WHEN MEASURED AT DIAMETER E.
3. REMOVE ALL BURRS, SLIVERS AND SHARP EDGES.
4. SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1 - 1962.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± 0.016 , ANGLES $\pm 1/2^\circ$.
6. ON STYLE S FITTING END, THE L DIMENSION PROVIDES FOR A WASHER TO FORM BACKING FACE AGAINST BULKHEAD, AND A .031 INCH LAND FOR POSITIONING IN BULKHEAD. ON STYLE E FITTING END NO WASHER IS REQUIRED.