

REV.
A

AS3410

FEDERAL SUPPLY CLASS
5306


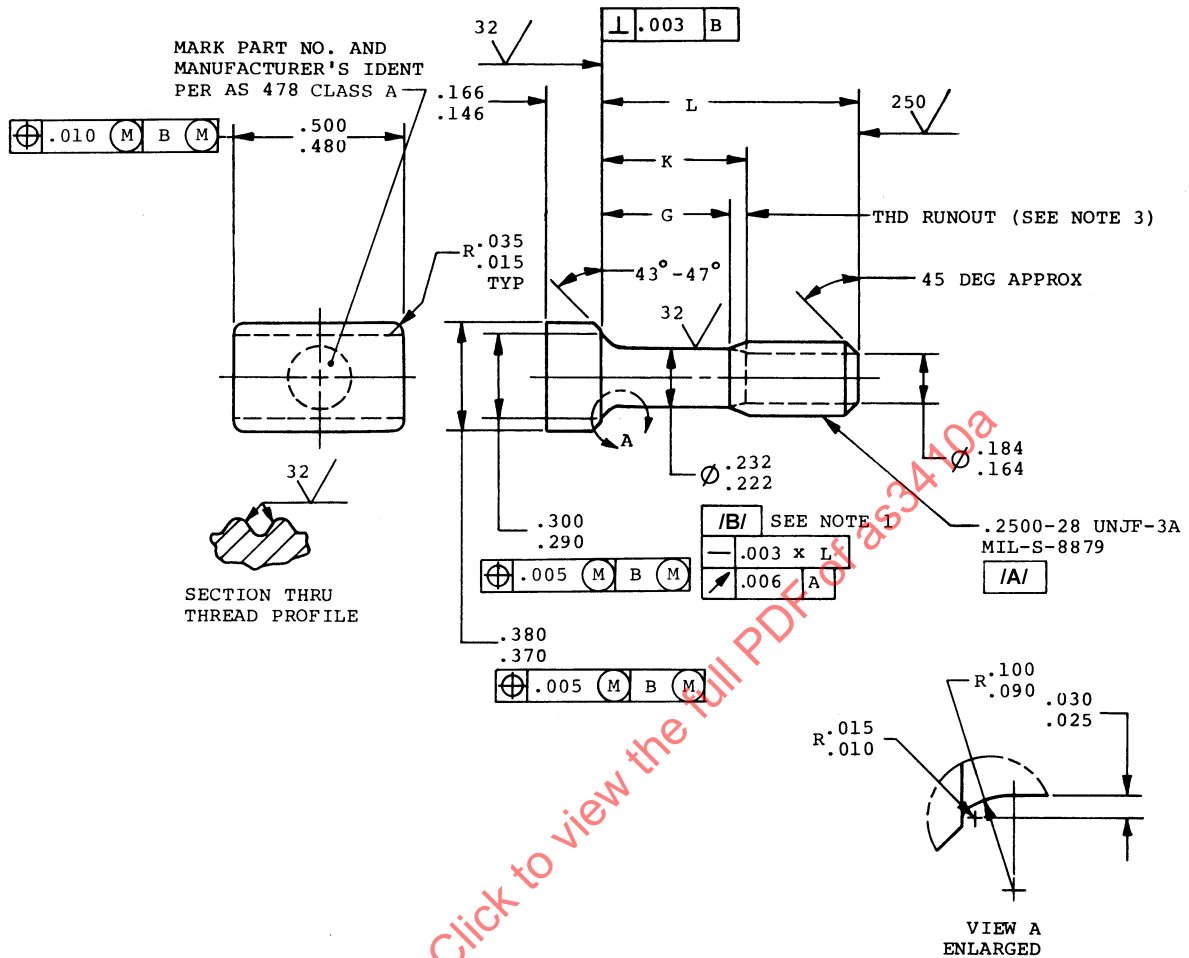


FIGURE 1

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

BOLT, TEE HEAD - AMS 5662, CHAMFERED,
.250-28UNJF-3A (STRESS RUPTURE RESISTANT)

AS3410
SHEET 1 OF 3

**REV.
A**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS3410

TABLE 1

PART NUMBER	L	G MIN	K MAX	APPROX MASS LB/100
AS3410-14	.990-1.10	.119	.250	1.95
AS3410-15	1.052-1.072	.181	.312	2.02
AS3410-16	1.115-1.135	.244	.375	2.09
AS3410-17	1.178-1.198	.307	.438	2.17
AS3410-18	1.240-1.260	.369	.500	2.25
AS3410-19	1.302-1.322	.431	.562	2.32
AS3410-20	1.365-1.385	.494	.625	2.39
AS3410-21	1.428-1.448	.557	.688	2.46
AS3410-22	1.490-1.510	.619	.750	2.52
AS3410-23	1.552-1.572	.681	.812	2.62
AS3410-24	1.615-1.635	.744	.875	2.69
AS3410-25	1.678-1.698	.807	.938	2.75
AS3410-26	1.740-1.760	.869	1.000	2.83
AS3410-27	1.802-1.822	.931	1.062	2.90
AS3410-28	1.865-1.885	.994	1.125	2.98
AS3410-29	1.928-1.948	1.057	1.188	3.05
AS3410-30	1.990-2.010	1.119	1.250	3.12
AS3410-31	2.115-2.135	1.244	1.375	3.28
AS3410-32	2.240-2.260	1.369	1.500	3.42
AS3410-33	2.365-2.385	1.494	1.625	3.57
AS3410-34	2.490-2.510	1.619	1.750	3.72
AS3410-35	2.615-2.635	1.744	1.875	3.86
AS3410-36	2.740-2.760	1.869	2.000	4.02
AS3410-37	2.865-2.885	1.994	2.125	4.16
AS3410-38	2.990-3.010	2.119	2.250	4.31
AS3410-39	3.115-3.135	2.244	2.375	4.45
AS3410-40	3.240-3.260	2.369	2.500	4.60
AS3410-41	3.365-3.385	2.494	2.625	4.76
AS3410-42	3.490-3.510	2.619	2.750	4.90
AS3410-43	3.615-3.635	2.744	2.875	5.05
AS3410-44	3.740-3.760	2.869	3.000	5.20
AS3410-45	3.865-3.885	2.994	3.125	5.35
AS3410-46	3.990-4.010	3.119	3.250	5.49
AS3410-47	4.115-4.135	3.244	3.375	5.64
AS3410-48	4.240-4.260	3.369	3.500	5.79
AS3410-49	4.365-4.385	3.494	3.625	5.93
AS3410-50	4.490-4.510	3.619	3.750	6.09
AS3410-51	4.615-4.635	3.744	3.875	6.23
AS3410-52	4.740-4.760	3.869	4.000	6.38
AS3410-53	4.865-4.885	3.994	4.125	6.53
AS3410-54	4.990-5.010	4.119	4.250	6.67
AS3410-55	5.115-5.135	4.244	4.375	6.82
AS3410-56	5.240-5.260	4.369	4.500	6.97
AS3410-57	5.365-5.385	4.494	4.625	7.12
AS3410-58	5.490-5.510	4.619	4.750	7.27
AS3410-59	5.615-5.635	4.744	4.875	7.40
AS3410-59	5.740-5.760	4.869	5.000	7.54
AS3410-60	5.865-5.885	4.994	5.125	7.69
AS3410-61	5.990-6.010	5.119	5.250	7.83
AS3410-62				

AEROSPACE STANDARD

BOLT, TEE HEAD - AMS 5662, CHAMFERED,
.250-28UNJF-3A (STRESS RUPTURE RESISTANT)

AS3410
SHEET 2 OF 3

REV.
A