



RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

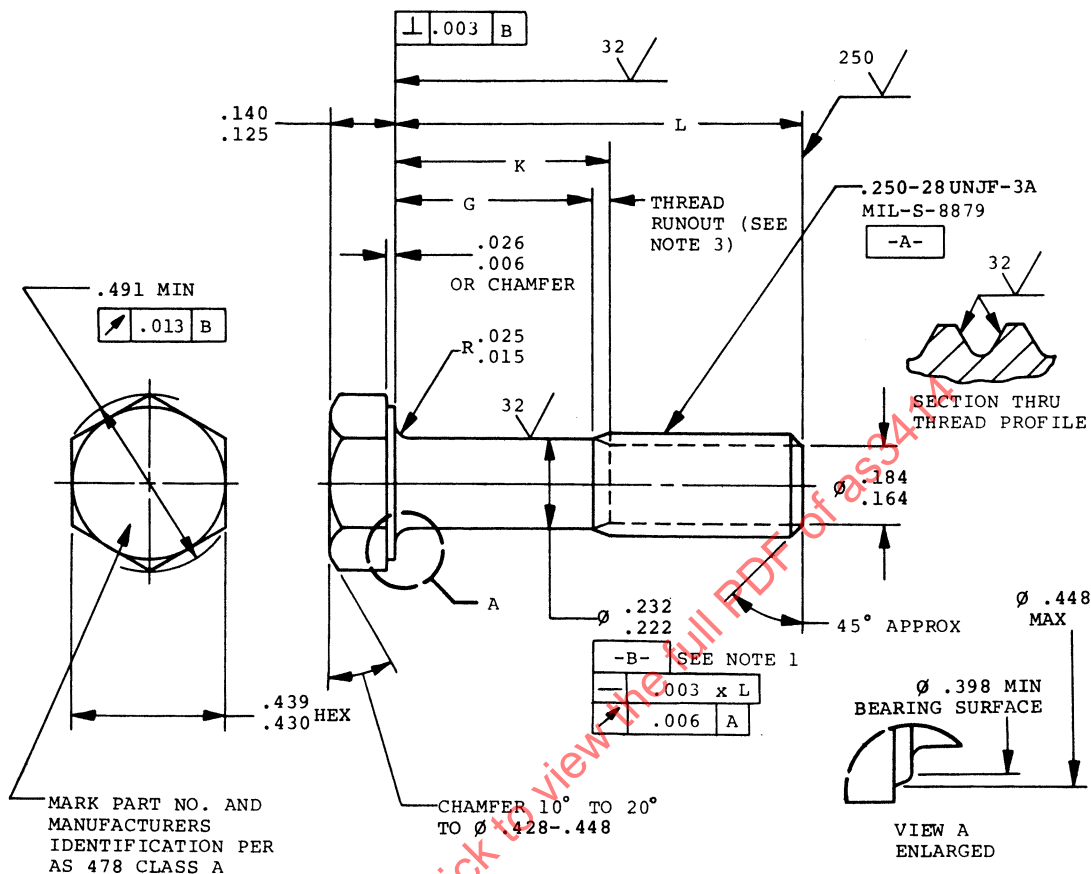

1. FOR PART NUMBERS AS3414-04 THRU AS3414-18 **-B-** IN TOL NOTES SHALL BE CHANGED TO **-A-**.
2. MATERIAL: CORROSION AND HEAT RESISTANT NICKEL ALLOY AMS 5662.
3. MANUFACTURING SPECIFICATION: AMS 7467 EXCEPT ROLL THREAD AND COLD WORK FILLET RADIUS AFTER PRECIPITATION HARDENING.
4. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
5. SURFACE TEXTURE: SYMBOLS PER ANSI Y14.36-1978; REQUIREMENTS PER ANSI B46.1-1978. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES Ra. EXCEPT UPSET HEAD TO BE 250 MICROINCHES Ra.
6. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS IN INCHES.
8. DIMENSIONS AND TOLERANCING ANSI Y14.5M-1982.
9. DO NOT USE UNASSIGNED PART NUMBERS.

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
 An SAE International Group

AEROSPACE STANDARD
 BOLT, MACHINE - HEXAGON HEAD, PD SHANK,
 AMS 5662, .250-28UNJF-3A
 (STRESS RUPTURE RESISTANT)

AS3414
 SHEET 1 OF 2