


RATIONALE


THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

AS3416

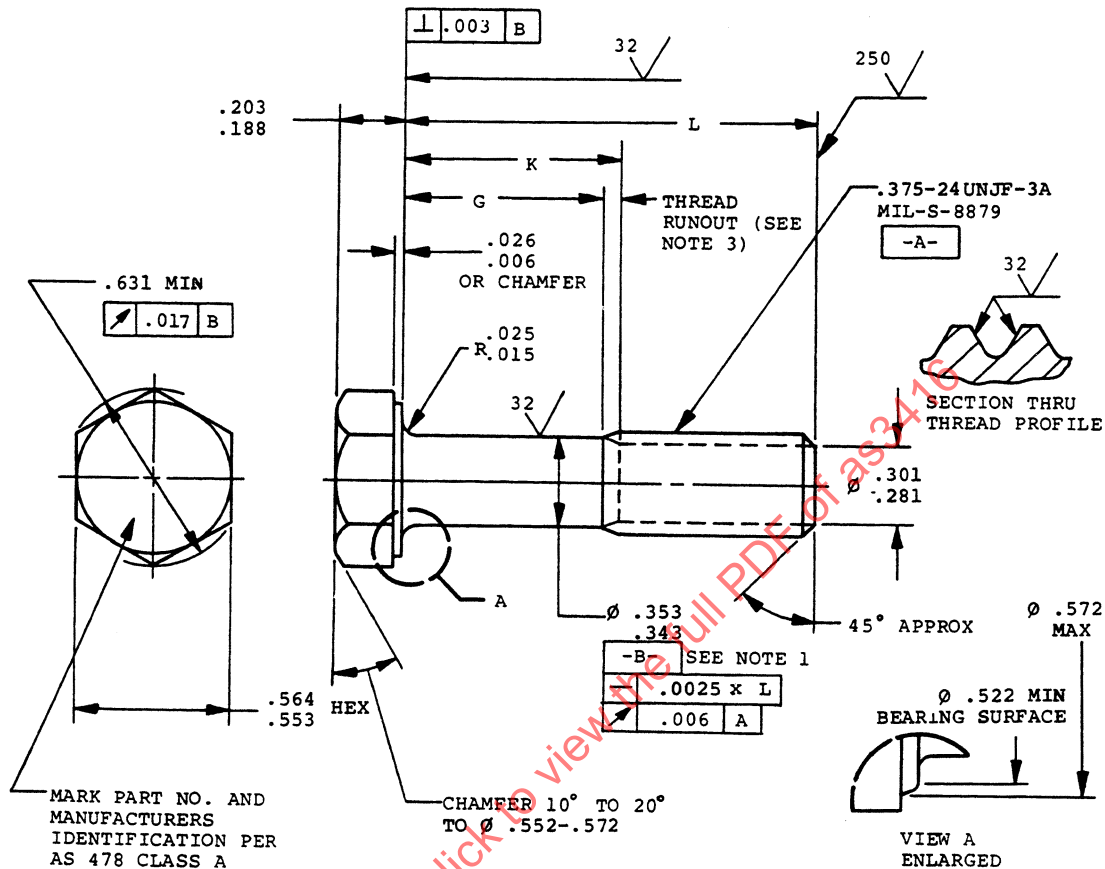

1. FOR PART NUMBERS AS3416-03 THRU AS3416-21 **-B-** IN TOL NOTES SHALL BE CHANGED TO **-A-**.
2. MATERIAL: CORROSION AND HEAT RESISTANT NICKEL ALLOY AMS 5662.
3. MANUFACTURING SPECIFICATION: AMS 7467 EXCEPT ROLL THREAD AND COLD WORK FILLET RADIUS AFTER PRECIPITATION HARDENING.
4. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
5. SURFACE TEXTURE: SYMBOLS PER ANSI Y14.36-1978; REQUIREMENTS PER ANSI B46.1-1978. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES Ra. EXCEPT UPSET HEAD TO BE 250 MICROINCHES Ra.
6. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS IN INCHES.
8. DIMENSIONS AND TOLERANCING ANSI Y14.5M-1982.
9. DO NOT USE UNASSIGNED PART NUMBERS.

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group**AEROSPACE STANDARD**
BOLT, MACHINE - HEXAGON HEAD, PD SHANK,
AMS 5662, .375-24UNJF-3A
(STRESS RUPTURE RESISTANT)**AS3416**
SHEET 1 OF 2

Copyright 2006 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>