

RATIONALE

CORRECT ERROR IN THE PROCUREMENT SPECIFICATION CALLOUT IN THE TITLE BLOCK ON SHEET 1.


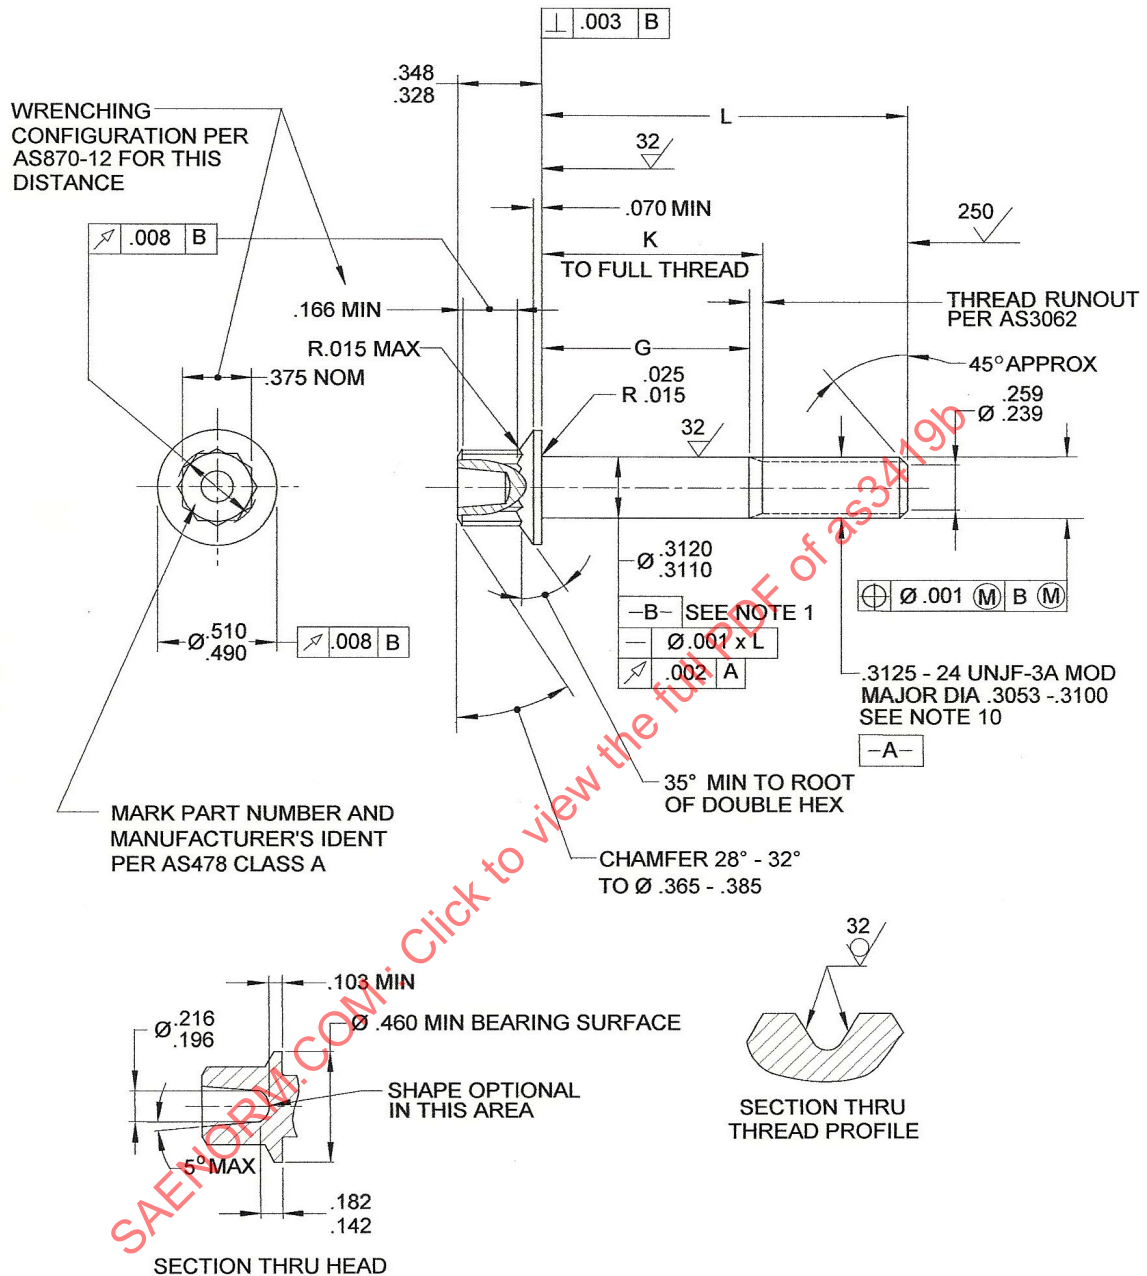


FIGURE 1 - BOLT

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3419B>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: /3/ AS7467

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD
BOLT, MACHINE, DOUBLE HEX, EXT WASHER HEAD,
CLOSE TOLERANCE SHANK, UNS N07718
.3125-24 UNJF-3A (STRESS RUPTURE RESISTANT)

SAE AS3419
SHEET 1 OF 3

REV.
B

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, stabilized or cancelled. SAE invites your written comments and suggestions.

SSUED	1985-12	REAFFIRMED	2006-05	REVISED	2012-08
-------	---------	------------	---------	---------	---------

TABLE 1 - DIMENSIONS

PART NUMBER	L ±.010	G MIN	K MAX	APPROX MASS LB/100	PART NUMBER	L ±.010	G MIN	K MAX	APPROX MASS LB/100
AS3419-03	.751	.105	.198	2.69	AS3419-53	3.875	3.229	3.322	9.74
AS3419-04	.813	.167	.260	2.83	AS3419-54	3.938	3.292	3.385	9.88
AS3419-05	.875	.229	.322	2.97	AS3419-55	4.001	3.355	3.448	10.02
AS3419-06	.938	.292	.385	3.11	AS3419-56	4.063	3.417	3.510	10.16
AS3419-07	1.001	.355	.448	3.25	AS3419-57	4.125	3.479	3.572	10.30
AS3419-08	1.063	.417	.510	3.40	AS3419-58	4.188	3.542	3.635	10.44
AS3419-09	1.125	.479	.572	3.53	AS3419-59	4.251	3.605	3.698	10.58
AS3419-10	1.188	.542	.635	3.68	AS3419-60	4.313	3.667	3.760	10.72
AS3419-11	1.251	.605	.698	3.82	AS3419-61	4.375	3.729	3.822	10.86
AS3419-12	1.313	.667	.760	3.96	AS3419-62	4.438	3.792	3.885	11.00
AS3419-13	1.375	.729	.822	4.10	AS3419-63	4.501	3.855	3.948	11.15
AS3419-14	1.438	.792	.885	4.24	AS3419-64	4.563	3.917	4.010	11.29
AS3419-15	1.501	.855	.948	4.38	AS3419-65	4.625	3.979	4.072	11.43
AS3419-16	1.563	.917	1.010	4.52	AS3419-66	4.688	4.042	4.135	11.57
AS3419-17	1.625	.979	1.072	4.66	AS3419-67	4.751	4.105	4.198	11.71
AS3419-18	1.688	1.042	1.135	4.80	AS3419-68	4.813	4.167	4.260	11.85
AS3419-19	1.751	1.105	1.198	4.95	AS3419-69	4.875	4.229	4.322	11.99
AS3419-20	1.813	1.167	1.260	5.08	AS3419-70	4.938	4.292	4.385	12.13
AS3419-21	1.875	1.229	1.322	5.22	AS3419-71	5.001	4.355	4.448	12.28
AS3419-22	1.938	1.292	1.385	5.37	AS3419-72	5.063	4.417	4.510	12.42
AS3419-23	2.001	1.355	1.448	5.51	AS3419-73	5.125	4.479	4.572	12.56
AS3419-24	2.063	1.417	1.510	5.65	AS3419-74	5.188	4.542	4.635	12.70
AS3419-25	2.125	1.479	1.572	5.79	AS3419-75	5.251	4.605	4.698	12.84
AS3419-26	2.188	1.542	1.635	5.93	AS3419-76	5.313	4.667	4.760	12.98
AS3419-27	2.251	1.605	1.698	6.07	AS3419-77	5.375	4.729	4.822	13.12
AS3419-28	2.313	1.667	1.760	6.21	AS3419-78	5.438	4.792	4.885	13.26
AS3419-29	2.375	1.729	1.822	6.35	AS3419-79	5.501	4.855	4.948	13.40
AS3419-30	2.438	1.792	1.885	6.49	AS3419-80	5.563	4.917	5.010	13.54
AS3419-31	2.501	1.855	1.948	6.64	AS3419-81	5.625	4.979	5.072	13.68
AS3419-32	2.563	1.917	2.010	6.78	AS3419-82	5.688	5.042	5.135	13.83
AS3419-33	2.625	1.979	2.072	6.92					
AS3419-34	2.688	2.042	2.135	7.06					
AS3419-35	2.751	2.105	2.198	7.20					
AS3419-36	2.813	2.167	2.260	7.34					
AS3419-37	2.875	2.229	2.322	7.48					
AS3419-38	2.938	2.292	2.385	7.62					
AS3419-39	3.001	2.355	2.448	7.76					
AS3419-40	3.063	2.417	2.510	7.91					
AS3419-41	3.125	2.479	2.572	8.04					
AS3419-42	3.188	2.542	2.635	8.19					
AS3419-43	3.251	2.605	2.698	8.33					
AS3419-44	3.313	2.667	2.760	8.47					
AS3419-45	3.375	2.729	2.822	8.61					
AS3419-46	3.438	2.792	2.885	8.75					
AS3419-47	3.501	2.855	2.948	8.89					
AS3419-48	3.563	2.917	3.010	9.03					
AS3419-49	3.625	2.979	3.072	9.17					
AS3419-50	3.688	3.042	3.135	9.32					
AS3419-51	3.751	3.105	3.198	9.46					
AS3419-52	3.813	3.167	3.260	9.60					