

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
D

AS3419™

FEDERAL SUPPLY CLASS
5306

RATIONALE

UPDATE TO ASME Y14.5-2018. UPDATE LEAD THREAD CHAMFER TO AS1132. REVISE POSITION FCF ON MAJ DIA TO INCLUDE NEW DATUM C PER AS1132. REVISE LIGHTENING HOLE CONFIGURATION TO AS1132. REVISE HEAD TO SHANK FILLET TO CR. ADD "COMPOSITION SIMILAR TO" TO UNS IN NOTE 2. GENERAL EDITORIAL UPDATES.


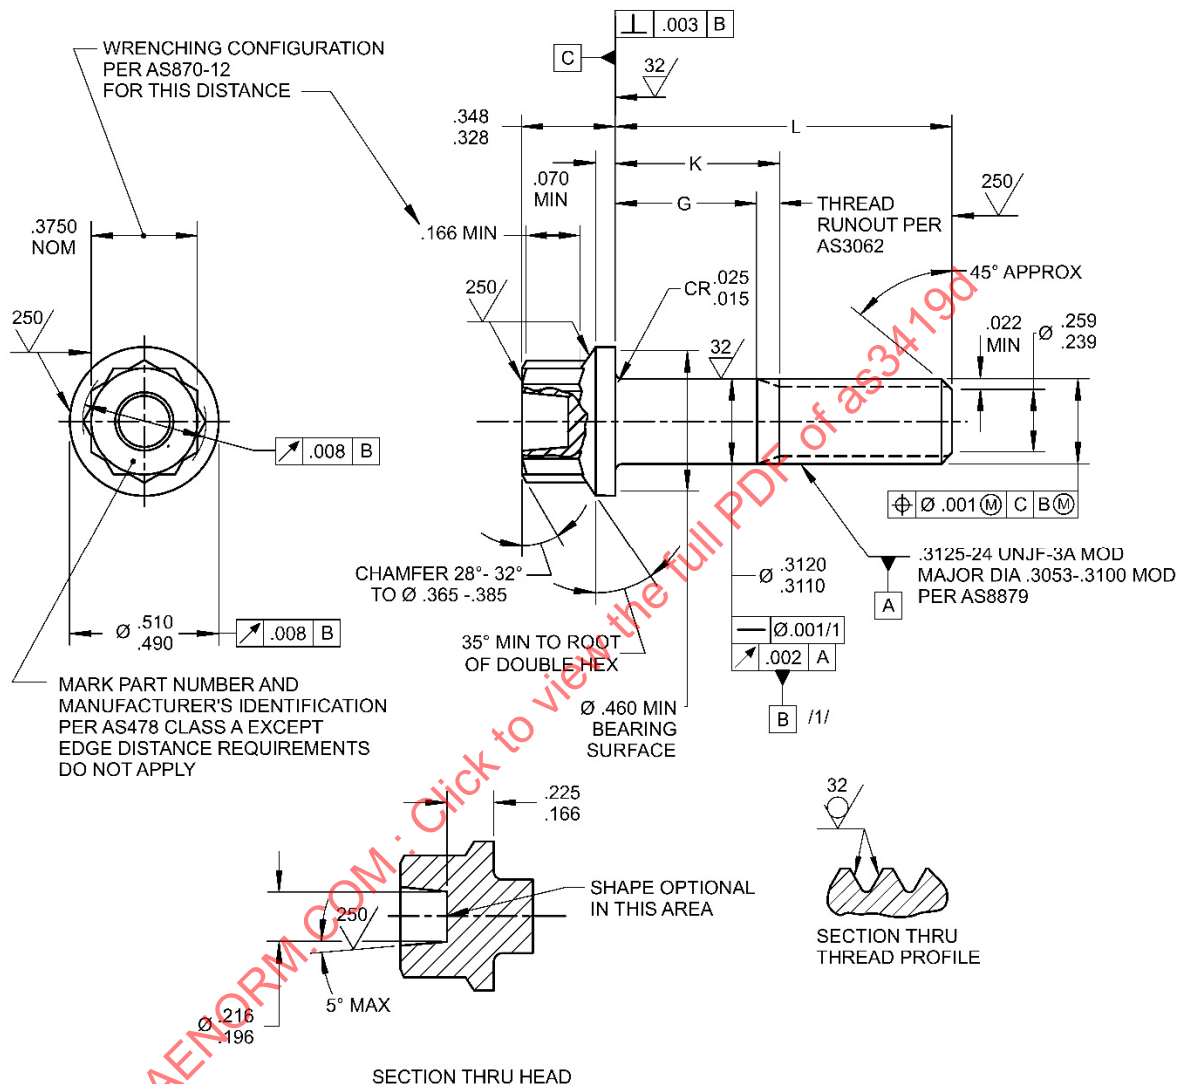


FIGURE 1 - BOLT

For more information on this standard, visit
<https://www.sae.org/standards/content/AS3419D/>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7467 /3/



AEROSPACE STANDARD

BOLT, MACHINE, DOUBLE HEXAGON EXTENDED
WASHER HEAD, CLOSE TOL. SHANK, UNS N07718,
185 KSI MIN, .3125-24 UNJF-3A
(STRESS RUPTURE RESISTANT)

AS3419™
SHEET 1 OF 3

REV.
D

TABLE 1 - PART NUMBERS, DIMENSIONS L, G, K, AND APPROX MASS

PART NUMBER	L ±.010	G MIN	K MAX	APPROX MASS LB/100	PART NUMBER	L ±.010	G MIN	K MAX	APPROX MASS LB/100
AS3419-03	.751	.105	.198	2.69	AS3419-53	3.875	3.229	3.322	9.74
AS3419-04	.813	.167	.260	2.83	AS3419-54	3.938	3.292	3.385	9.88
AS3419-05	.875	.229	.322	2.97	AS3419-55	4.001	3.355	3.448	10.02
AS3419-06	.938	.292	.385	3.11	AS3419-56	4.063	3.417	3.510	10.16
AS3419-07	1.001	.355	.448	3.25	AS3419-57	4.125	3.479	3.572	10.30
AS3419-08	1.063	.417	.510	3.40	AS3419-58	4.188	3.542	3.635	10.44
AS3419-09	1.125	.479	.572	3.53	AS3419-59	4.251	3.605	3.698	10.58
AS3419-10	1.188	.542	.635	3.68	AS3419-60	4.313	3.667	3.760	10.72
AS3419-11	1.251	.605	.698	3.82	AS3419-61	4.375	3.729	3.822	10.86
AS3419-12	1.313	.667	.760	3.96	AS3419-62	4.438	3.792	3.885	11.00
AS3419-13	1.375	.729	.822	4.10	AS3419-63	4.501	3.855	3.948	11.15
AS3419-14	1.438	.792	.885	4.24	AS3419-64	4.563	3.917	4.010	11.29
AS3419-15	1.501	.855	.948	4.38	AS3419-65	4.625	3.979	4.072	11.43
AS3419-16	1.563	.917	1.010	4.52	AS3419-66	4.688	4.042	4.135	11.57
AS3419-17	1.625	.979	1.072	4.66	AS3419-67	4.751	4.105	4.198	11.71
AS3419-18	1.688	1.042	1.135	4.80	AS3419-68	4.813	4.167	4.260	11.85
AS3419-19	1.751	1.105	1.198	4.95	AS3419-69	4.875	4.229	4.322	11.99
AS3419-20	1.813	1.167	1.260	5.08	AS3419-70	4.938	4.292	4.385	12.13
AS3419-21	1.875	1.229	1.322	5.22	AS3419-71	5.001	4.355	4.448	12.28
AS3419-22	1.938	1.292	1.385	5.37	AS3419-72	5.063	4.417	4.510	12.42
AS3419-23	2.001	1.355	1.448	5.51	AS3419-73	5.125	4.479	4.572	12.56
AS3419-24	2.063	1.417	1.510	5.65	AS3419-74	5.188	4.542	4.635	12.70
AS3419-25	2.125	1.479	1.572	5.79	AS3419-75	5.251	4.605	4.698	12.84
AS3419-26	2.188	1.542	1.635	5.93	AS3419-76	5.313	4.667	4.760	12.98
AS3419-27	2.251	1.605	1.698	6.07	AS3419-77	5.375	4.729	4.822	13.12
AS3419-28	2.313	1.667	1.760	6.21	AS3419-78	5.438	4.792	4.885	13.26
AS3419-29	2.375	1.729	1.822	6.35	AS3419-79	5.501	4.855	4.948	13.40
AS3419-30	2.438	1.792	1.885	6.49	AS3419-80	5.563	4.917	5.010	13.54
AS3419-31	2.501	1.855	1.948	6.64	AS3419-81	5.625	4.979	5.072	13.68
AS3419-32	2.563	1.917	2.010	6.78	AS3419-82	5.688	5.042	5.135	13.83
AS3419-33	2.625	1.979	2.072	6.92					
AS3419-34	2.688	2.042	2.135	7.06					
AS3419-35	2.751	2.105	2.198	7.20					
AS3419-36	2.813	2.167	2.260	7.34					
AS3419-37	2.875	2.229	2.322	7.48					
AS3419-38	2.938	2.292	2.385	7.62					
AS3419-39	3.001	2.355	2.448	7.76					
AS3419-40	3.063	2.417	2.510	7.91					
AS3419-41	3.125	2.479	2.572	8.04					
AS3419-42	3.188	2.542	2.635	8.19					
AS3419-43	3.251	2.605	2.698	8.33					
AS3419-44	3.313	2.667	2.760	8.47					
AS3419-45	3.375	2.729	2.822	8.61					
AS3419-46	3.438	2.792	2.885	8.75					
AS3419-47	3.501	2.855	2.948	8.89					
AS3419-48	3.563	2.917	3.010	9.03					
AS3419-49	3.625	2.979	3.072	9.17					
AS3419-50	3.688	3.042	3.135	9.32					
AS3419-51	3.751	3.105	3.198	9.46					
AS3419-52	3.813	3.167	3.260	9.60					



AEROSPACE STANDARD

BOLT, MACHINE, DOUBLE HEXAGON EXTENDED
WASHER HEAD, CLOSE TOL. SHANK, UNS N07718,
185 KSI MIN, .3125-24 UNJF-3A
(STRESS RUPTURE RESISTANT)

AS3419™
SHEET 2 OF 3

**REV.
D**